

Bulletin 100S/104S Safety Contactors

- Mechanically linked N.C. auxiliary contacts
- Front-mounted auxiliary contacts:
Gold bifurcated

Permanently fixed

Protective cover to prevent manual operation

Red contact housing for easy identification

Incorporates IEC 60947-5-1 “Mechanically Linked” symbol

- AC and DC operating coils
- SUVA Third-Party certification

Bulletin 100S-C/104S-C safety contactors provide mechanically linked positively guided contacts, required in feedback circuits of modern safety applications. The mechanically linked N.C. auxiliary contacts will not change state when a power pole welds. In addition, the gold-plated bifurcated auxiliary contacts are ideally suited for low-energy applications or feedback control circuits with multiple series-connected N.C. auxiliary contacts.

Your order must include: cat. no. of the contactor specified with coil voltage code and, if required, cat. no. of any accessories and/or replacement coils.

Standards Compliance and Certifications

Standards Compliance

EN50205

CSA C22.2 No. 14

UL 508

EN/IEC 60947-4

IEC 60947-4-1 Annex H — Mirror Contacts

IEC 60947-5-1 Annex L — Mechanically Linked Contacts

Certifications

SUVA Third-Party Certified

CE Marked

cULus Listed (File No. E3125;

Guide NLDX, NLDX7)



Cat. No.
100S-
C09U⊗05C
Load Side

4-Pole AC- and DC-Operated Contactors

| I_c [A] | Ratings for Switching AC Motors | | | | | | | | | | | Contact Configuration | | | | Cat. No. ★ ‡ | | |
|-----------|---------------------------------|------|------------------|-------------|------------------|-------|------------------|-------|------------------|-------|------------------|-----------------------|-----------|--------------------|------|--------------|------|----------------|
| | AC-2, AC-3, AC-4 | | AC-2, AC-3, AC-4 | | AC-2, AC-3, AC-4 | | AC-2, AC-3, AC-4 | | AC-2, AC-3, AC-4 | | AC-2, AC-3, AC-4 | | Main Pole | Auxiliary Contacts | | | | |
| | | | | | | | | | | | | | | | | | | |
| | AC-3 | AC-1 | 230 V | 400V / 415V | 500 V | 690 V | 1∅ | | 3∅ * | | | | | | | | | |
| | | | | | | | 115 V | 230 V | 200 V | 230 V | 460 V | 575 V | N.O. | N.O. | C.N. | N.O. | N.C. | |
| 9 | 32 | 3 | 4 | 4 | 4 | 1/2 | 1-1/2 | 2 | 2 | 5 | 7-1/2 | 4 | 0 | 0 | 4 | | | 100S-C09⊗404BC |
| | | | | | | | | | | | | 3 | 1 | 0 | 4 | | | 100S-C09⊗304BC |
| 12 | 32 | 4 | 5.5 | 5.5 | 5.5 | 1/2 | 2 | 3 | 3 | 7-1/2 | 10 | 4 | 0 | 0 | 4 | | | 100S-C12⊗404BC |
| | | | | | | | | | | | | 3 | 1 | 0 | 4 | | | 100S-C12⊗304BC |
| 16 | 32 | 5.5 | 7.5 | 7.5 | 7.5 | 1 | 3 | 5 | 5 | 10 | 15 | 4 | 0 | 0 | 4 | | | 100S-C16⊗404BC |
| | | | | | | | | | | | | 3 | 1 | 0 | 4 | | | 100S-C16⊗304BC |
| 23 | 32 | 7.5 | 11 | 13 | 10 | 2 | 3 | 5 | 7-1/2 | 15 | 15 | 4 | 0 | 0 | 4 | | | 100S-C23⊗404BC |
| | | | | | | | | | | | | 3 | 1 | 0 | 4 | | | 100S-C23⊗304BC |

★ For other contact configurations, please contact your local Rockwell Automation sales office or Allen-Bradley distributor.

* Three-phase ratings only apply to contactors with at least three N.O. power poles.

‡ If standard cross-stamped front-mount auxiliary contacts are required, remove the letter "B" before the letter "C" in the cat. no. Example: Cat. No. **100S-C09⊗404BC** becomes Cat. No. **100S-C09⊗404C**.

⊗Coil voltage code and terminal position—see [⊗ Coil Voltage Code and Terminal Position](#)

85 100 25 45 55 45 7-1/2 15 25 30 60 60 0 5 § 104S-
 C85⊗010BC
 1 5 § 104S-
 C85⊗210BC

★ For other contact configurations, please contact your local Rockwell Automation sales office or Allen-Bradley distributor.

※ If standard cross-stamped front-mount auxiliary contacts are required, remove the letter "B" before the letter "C" in the cat. no. Example: Cat. No. **104S-C09⊗05BC** becomes Cat. No. **104S-C09⊗05C**.

‡ One of the N.C. auxiliary contacts is supplied as part of the mechanical/electrical interlock.

§ Bifurcated front-mount auxiliary contacts on Cat. Nos. **104S-C60...C85** conform to mirror contact performance only.

⊗ Coil Voltage Code and Terminal Position

The Cat. No. as listed is incomplete. Select a coil voltage code from the table below to complete the Cat. No. Example: 120V, 60Hz: **Cat. No. 100S-C09⊗05BC** becomes **Cat. No. 100S-C09D05BC**.

| | | | | | | | | | | | | | | | | |
|--------------|----|----|----|----|----|----|-----|-------------|-----|-----|-----|-----|-------------|-----|-------------|-------------|
| [V] | 12 | 24 | 32 | 36 | 42 | 48 | 100 | 100- 110 | 110 | 120 | 127 | 200 | 200- 220 | 208 | 208- 240 | 220- 230 |
| AC, 50 Hz | R | K | V | W | X | Y | KP | — | D | P | S | KGL | — | — | — | F |
| AC, 60 Hz | Q | J | — | V | — | X | — | KP | — | D | — | — | KG | H | L | — |
| AC, 50/60 Hz | — | KJ | — | — | — | KY | KP | — | KD | — | — | — | KGKL | — | — | KL |

| | | | | | | | | | | | | | | |
|--------------|-----|-------------|-----|-----|-----|-----|-------------|-----|-------------|-----|-----|-----|-----|-----|
| [V] | 230 | 230- 240 | 240 | 277 | 347 | 380 | 380- 400 | 400 | 400- 415 | 440 | 480 | 500 | 550 | 600 |
| AC, 50 Hz | — | VA | T | — | — | — | N | — | G | B | — | M | C | — |
| AC, 60 Hz | — | — | A | T | I | E | — | — | — | N | B | — | — | C |
| AC, 50/60 Hz | KF | — | KA | — | — | — | — | KN | — | KB | — | — | — | — |

| | | | | | | | | | | | | | | | | |
|--------------------|-------------------------------------|-------|----|----|----|----|----|----|----|----|-----|-----|------|-----|-----|-----|
| 100S- C09...C43 | Standard with Integrated Diode | [V]9 | 12 | 24 | 36 | 48 | 60 | 64 | 72 | 80 | 110 | 115 | 125 | 220 | 230 | 250 |
| | Electronic with Integrated Diode | DCZR | ZQ | ZJ | ZW | ZY | ZZ | ZB | ZG | ZE | ZD | ZP | ZS | ZA | ZF | ZT |
| | | — | — | DJ | — | — | — | — | — | — | — | — | — | — | — | — |
| | | — | — | EJ | — | — | — | — | — | — | — | — | — | — | — | — |
| 100S- C60...C85 | with Integrated Diode | DRDQD | JD | WD | YD | ZD | BD | GD | ED | DD | DP | DS | DADF | DT | | |




Coil Terminal Position

- All contactors are delivered with the coil terminals located on the **line side**.
- For **load side** coil terminations, insert a "U" prior to the coil voltage code.
 Example: **Cat. No. 100S-C09UD05BC**.



Terminal Markings

Terminal Markings



3-Pole Safety Contactors

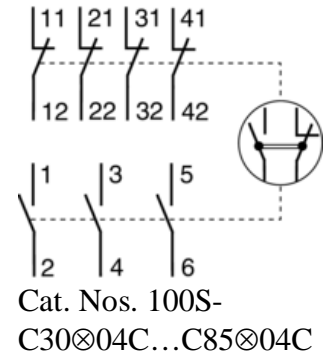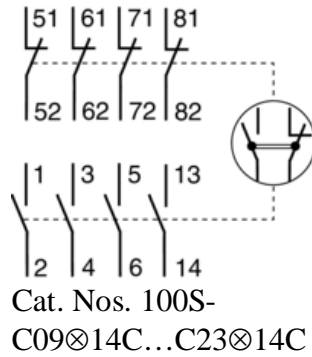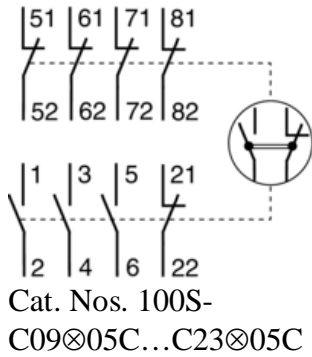

4-Pole Safety Contactors



Reversing Safety Contactors

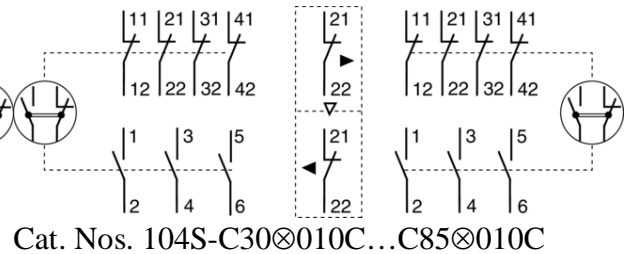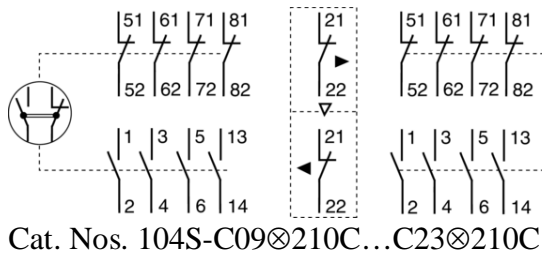

Bulletin 100/104-K, 100/104-C, 100/104-D, 100S/104S-C, 100S-D Specifications

| | 100/104-K 100/104-C, 100S/104S-C | | | | | | | | | | | | | | |
|--------------------------|----------------------------------|----|----|----|----|----|----|----|----|-----|-----|-----|-----|----|----|
| | 05 | 09 | 12 | 09 | 12 | 16 | 23 | 30 | 37 | 40* | 200 | 40* | 400 | 43 | 60 |
| Coil Type : Conventional | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X |
| Electronic — EI | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |

AC-1 Active Power Load (50 Hz);

Ambient temperature 40 °C

| | | | | | | | | | | | | | | | | |
|-------|--------|------|------|-----|-----|----|----|----|----|-------|----|----|----|----|-----|-----|
| I_e | ≤ 500V | [A] | 20 | 20 | 20 | 32 | 32 | 32 | 32 | (40)* | 65 | 65 | 75 | 75 | 85 | 100 |
| | 690V | [A] | 20 | 20 | 20 | 32 | 32 | 32 | 32 | (40)* | 65 | 65 | 75 | 75 | 85 | 100 |
| | 1000V | [A] | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| | 230V | [kW] | 8 | 8 | 8 | 13 | 13 | 13 | 13 | | 26 | 26 | 30 | 30 | 34 | 40 |
| | 240V | [kW] | 8.38 | 8.3 | 8.3 | 13 | 13 | 13 | 13 | | 27 | 27 | 31 | 31 | 35 | 42 |
| | 400V | [kW] | 14 | 14 | 14 | 22 | 22 | 22 | 22 | | 45 | 45 | 52 | 52 | 59 | 69 |
| | 415V | [kW] | 14 | 14 | 14 | 23 | 23 | 23 | 23 | | 47 | 47 | 54 | 54 | 61 | 72 |
| | 500V | [kW] | 17 | 17 | 17 | 28 | 28 | 28 | 28 | | 56 | 56 | 65 | 65 | 74 | 87 |
| | 690V | [kW] | 24 | 24 | 24 | 38 | 38 | 38 | 38 | | 78 | 78 | 90 | 90 | 102 | 120 |
| | 1000V | [kW] | — | — | — | — | — | — | — | | — | — | — | — | — | — |

Ambient temperature 60 °C

| | | | | | | | | | | | | | | | | |
|-------|--------|------|------|-----|-----|----|----|----|----|--|----|----|----|----|----|-----|
| I_e | ≤ 500V | [A] | 16 | 16 | 16 | 32 | 32 | 32 | 32 | | 65 | 65 | 60 | 60 | 80 | 100 |
| | 690V | [A] | 16 | 16 | 16 | 32 | 32 | 32 | 32 | | 65 | 65 | 60 | 60 | 80 | 100 |
| | 1000V | [A] | — | — | — | — | — | — | — | | — | — | — | — | — | — |
| | 230V | [kW] | 6.46 | 6.4 | 6.4 | 13 | 13 | 13 | 13 | | 26 | 26 | 24 | 24 | 25 | 40 |
| | 240V | [kW] | 6.76 | 6.7 | 6.7 | 13 | 13 | 13 | 13 | | 27 | 27 | 25 | 25 | 26 | 42 |
| | 400V | [kW] | 11 | 11 | 11 | 22 | 22 | 22 | 22 | | 45 | 45 | 42 | 42 | 44 | 69 |
| | 415V | [kW] | 12 | 12 | 12 | 23 | 23 | 23 | 23 | | 47 | 47 | 43 | 43 | 45 | 72 |
| | 500V | [kW] | 14 | 14 | 14 | 28 | 28 | 28 | 28 | | 56 | 56 | 52 | 52 | 55 | 87 |
| | 690V | [kW] | 19 | 19 | 19 | 38 | 38 | 38 | 38 | | 78 | 78 | 72 | 72 | 75 | 120 |
| | 1000V | [kW] | — | — | — | — | — | — | — | | — | — | — | — | — | — |

Switching of 3-phase Motors; (50 Hz)

Ambient temperature 60 °C, AC-2, AC-3

| | | | | | | | | | | | | | | | |
|-------|------|------|-------|-------|----|-----|-----|------|--|----|------|------|------|----|------|
| 230V | [A] | 6.3 | 11.3 | 11.3 | 12 | 15 | 20 | 26.5 | | 35 | 38 | 38 | 38 | 44 | 62 |
| 240V | [A] | 6.3 | 11.3 | 11.3 | 12 | 15 | 20 | 26.5 | | 35 | 38 | 38 | 38 | 44 | 62 |
| 400V | [A] | 4.98 | 11.59 | 11.59 | 12 | 16 | 23 | | | 30 | 37 | 37 | 37 | 43 | 60 |
| 415V | [A] | 4.98 | 11.59 | 11.59 | 12 | 16 | 23 | | | 30 | 37 | 37 | 37 | 43 | 60 |
| 500V | [A] | 3.96 | 9.2 | 9.2 | 7 | 10 | 14 | 20 | | 25 | 30 | 29 | 30 | 38 | 55 |
| 690V | [A] | 2.84 | 6.7 | 6.7 | 5 | 7 | 9 | 12 | | 18 | 21 | 9 | 21 | 25 | 34 |
| 1000V | [A] | — | — | — | — | — | — | — | | — | — | — | — | — | — |
| 230V | [kW] | 1.53 | 3 | 3 | 4 | 5.5 | 7.5 | | | 10 | 11 | 11 | 11 | 13 | 18.5 |
| 240V | [kW] | 1.53 | 3 | 3 | 4 | 5.5 | 7.5 | | | 10 | 11 | 11 | 11 | 13 | 18.5 |
| 400V | [kW] | 2.24 | 5.5 | 5.5 | 4 | 5.5 | 7.5 | 11 | | 15 | 18.5 | 18.5 | 18.5 | 22 | 32 |
| 415V | [kW] | 2.24 | 5.5 | 5.5 | 4 | 5.5 | 7.5 | 11 | | 15 | 20 | 20 | 20 | 22 | 32 |
| 500V | [kW] | 2.24 | 5.5 | 5.5 | 4 | 5.5 | 7.5 | 13 | | 15 | 20 | 18.5 | 20 | 25 | 37 |
| 690V | [kW] | 2.24 | 5.5 | 5.5 | 4 | 5.5 | 7.5 | 10 | | 15 | 18.5 | 7.5 | 18.5 | 22 | 32 |
| 1000V | [kW] | — | — | — | — | — | — | — | | — | — | — | — | — | — |

Load Carrying Capacity per UL/CSA

General Purpose Current (enclosed)

| | | | | | | | | | | | | | | | |
|------------------------|-----|------|-----|-------|------|------|----|----|--|----|----|----|----|----|----|
| | [A] | 12 | 15 | 18 | 25 | 25 | 30 | 30 | | 55 | 60 | 60 | 60 | 75 | 90 |
| Rated power (enclosed) | | | | | | | | | | | | | | | |
| 1-phase 115V | [A] | 9.89 | 8.8 | 13.89 | 8.89 | 8.81 | 6 | 24 | | 24 | 34 | 34 | 34 | 34 | 56 |

| | | | | | | | | | | | | | | | | |
|---------|------|------|------|-----|------|------|------|------|------|------|------|------|------|------|----|---|
| 3-phase | 230V | [A] | 8 | 10 | 12 | 10 | 12 | 17 | 17 | 28 | 28 | 28 | 28 | 40 | 50 | |
| | 115V | [Hp] | 0.50 | 0.5 | 0.75 | 0.50 | 0.51 | 2 | | 2 | 3 | 3 | 3 | 3 | 5 | |
| | 230V | [Hp] | 1 | 1.5 | 2 | 1.52 | 3 | 3 | | 5 | 5 | 5 | 5 | 7.5 | 10 | |
| | 200V | [A] | 6.97 | 8 | 11 | 7.81 | 11 | 17.5 | 17.5 | 25.3 | 32.2 | 32.2 | 32.2 | 32.2 | 48 | 3 |
| | 230V | [A] | 6 | 6.8 | 9.6 | 6.8 | 9.6 | 15.2 | 22 | 28 | 28 | 28 | 28 | 42 | 54 | |
| | 460V | [A] | 4.87 | 6 | 11 | 7.6 | 11 | 14 | 21 | 27 | 34 | 34 | 34 | 40 | 52 | |
| | 575V | [A] | 3.96 | 1 | 9 | 9 | 11 | 17 | 17 | 27 | 32 | 17 | 32 | 32 | 52 | |
| | 200V | [Hp] | 1.52 | 3 | 2 | 3 | 5 | 5 | | 7.5 | 10 | 10 | 10 | 10 | 15 | |
| | 230V | [Hp] | 1.52 | 3 | 2 | 3 | 5 | 7.5 | | 10 | 10 | 10 | 10 | 15 | 20 | |
| | 460V | [Hp] | 3 | 5 | 7.5 | 5 | 7.5 | 10 | 15 | 20 | 25 | 25 | 25 | 30 | 40 | |
| | 575V | [Hp] | 3 | 5 | 7.5 | 7.5 | 10 | 15 | 15 | 25 | 30 | 15 | 30 | 30 | 50 | |

★ Values in () with increased cross-section and cable lug

| | | 100/104-C, 100S/104S-C | | | | 100/104-D, 100S-D | | | | | | | | | | | | |
|------------------|--------------|----------------------------------------|----|------|------|-------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| | | 72 | 85 | 90*2 | 90*4 | 95 | 110 | 140 | 140 | 180 | 180 | 210 | 250 | 300 | 420 | 630 | 860 | |
| | | 00 | 00 | | | | | | | | | | | | 0 | 0 | | |
| Coil Type | Conventional | X | X | X | X | X | X | X | — | X | — | — | — | — | — | — | — | |
| : | Electronic | — | — | — | — | X | X | — | X | — | X | X | X | X | X | X | X | |
| | — EI | | | | | | | | | | | | | | | | | |
| AC-1 | Electronic | AC-1 Active Power Load (50 Hz); | | | | | | | | | | | | | | | | |
| Active | — EI | Ambient temperature 40 °C | | | | | | | | | | | | | | | | |
| Power | | | | | | | | | | | | | | | | | | |
| Load (50 | | | | | | | | | | | | | | | | | | |
| Hz); | | | | | | | | | | | | | | | | | | |
| Ambient | | | | | | | | | | | | | | | | | | |
| temperat | | | | | | | | | | | | | | | | | | |
| ure 40 °C | | | | | | | | | | | | | | | | | | |
| I_e | ≤ | [A] | 10 | 10 | 130 | 130 | 16 | 160 | 250 | 250 | 250 | 250 | 350 | 350 | 450 | 54 | 80 | 100 |
| | 500V | | 0 | 0 | | | 0 | | | | | | | | | 0 | 0 | 0 |
| | 690V | [A] | 10 | 10 | 130 | 130 | 16 | 160 | 250 | 250 | 250 | 250 | 350 | 350 | 450 | 54 | 80 | 100 |
| | | | 0 | 0 | | | 0 | | | | | | | | | 0 | 0 | 0 |
| | 1000 | [A] | — | — | — | — | 16 | 160 | 250 | 250 | 250 | 250 | 350 | 350 | 450 | 54 | — | — |
| | V | | | | | | 0 | | | | | | | | | 0 | | |
| | 230V | [kW] | 40 | 40 | 52 | 52 | 64 | 64 | 100 | 100 | 100 | 100 | 139 | 139 | 179 | 19 | 31 | 39 |
| |] | | | | | | | | | | | | | | | 9 | 9 | |
| | 240V | [kW] | 42 | 42 | 54 | 54 | 67 | 67 | 104 | 104 | 104 | 104 | 145 | 145 | 187 | 20 | 33 | 41 |
| |] | | | | | | | | | | | | | | | 8 | 3 | |
| | 400V | [kW] | 69 | 69 | 90 | 90 | 11 | 111 | 173 | 173 | 173 | 173 | 242 | 242 | 312 | 34 | 55 | 69 |
| |] | | | | | | 1 | | | | | | | | | 6 | 4 | |
| | 415V | [kW] | 72 | 72 | 93 | 93 | 11 | 115 | 180 | 180 | 180 | 180 | 252 | 252 | 323 | 35 | 57 | 71 |
| |] | | | | | | 5 | | | | | | | | | 9 | 5 | |
| | 500V | [kW] | 87 | 87 | 113 | 113 | 13 | 139 | 217 | 217 | 217 | 217 | 303 | 303 | 390 | 43 | 69 | 86 |
| |] | | | | | | 9 | | | | | | | | | 3 | 3 | |
| | 690V | [kW] | 12 | 12 | 155 | 155 | 19 | 191 | 299 | 299 | 299 | 299 | 418 | 418 | 538 | 59 | 95 | 119 |
| |] | | 0 | 0 | | | 1 | | | | | | | | | 8 | 6 | 5 |
| | 1000 | [kW] | — | — | — | — | 27 | 277 | 433 | 433 | 433 | 433 | 606 | 606 | 779 | 86 | — | — |
| | V | | | | | | 7 | | | | | | | | | 6 | | |
| Ambient | Electronic | Ambient temperature 60 °C | | | | | | | | | | | | | | | | |

| | | | | | | | | | | | | | | | | | |
|------------------------------------------|-----------------------------------------------------|------|------|------|------|------|-----|-----|-----|-----|-----|-----|-----|-----|----|-----|-----|
| | 1000 [kW | — | — | — | — | 45 | 55 | 75 | 75 | 90 | 90 | 110 | 132 | 160 | 22 | — | — |
| | V] | | | | | | | | | | | | | | 5 | | |
| Load Carrying Capacity per UL/CSA | Electronic Load Carrying Capacity per UL/CSA | | | | | | | | | | | | | | | | |
| | General Purpose Current (enclosed) | | | | | | | | | | | | | | | | |
| | [A] | 90 | 10 | 125 | 130 | 16 | 160 | 220 | 220 | 220 | 220 | 300 | 300 | 340 | 42 | 63 | 860 |
| | | 0 | | | | 0 | | | | | | | | | 0 | 0 | |
| | Rated power (enclosed) | | | | | | | | | | | | | | | | |
| 1-phase | 115V [A] | 56 | 80 | 80 | 80 | 80 | 100 | 135 | 135 | — | — | — | — | — | — | — | — |
| | 230V [A] | 68 | 68 | 68 | 68 | 68 | 110 | 136 | 136 | 176 | 176 | 216 | — | — | — | — | — |
| | 115V [Hp] | 5 | 7.5 | 7.5 | 7.5 | 7.5 | 10 | 15 | 15 | — | — | — | — | — | — | — | — |
| | 230V [Hp] | 15 | 15 | 15 | 15 | 15 | 25 | 30 | 30 | 40 | 40 | 50 | — | — | — | — | — |
| 3-phase | 200V [A] | 62.1 | 78.2 | 78.2 | 78.2 | 78.2 | 120 | 120 | 150 | 150 | 177 | 221 | 285 | 41 | 55 | 692 | |
| | 230V [A] | 68 | 80 | 80 | 80 | 80 | 104 | 130 | 130 | 154 | 154 | 192 | 248 | 312 | 42 | 60 | 720 |
| | 460V [A] | 65 | 77 | 65 | 77 | 77 | 96 | 124 | 124 | 180 | 180 | 180 | 240 | 302 | 41 | 59 | 702 |
| | 575V [A] | 62 | 62 | 22 | 52 | 77 | 99 | 125 | 125 | 144 | 144 | 192 | 242 | 289 | 38 | 56 | 651 |
| | 200V [Hp] | 20 | 25 | 25 | 25 | 25 | 40 | 40 | 40 | 50 | 50 | 60 | 75 | 100 | 15 | 20 | 250 |
| | 230V [Hp] | 25 | 30 | 30 | 30 | 30 | 40 | 50 | 50 | 60 | 60 | 75 | 100 | 125 | 17 | 25 | 300 |
| | 460V [Hp] | 50 | 60 | 50 | 60 | 60 | 75 | 100 | 100 | 150 | 150 | 150 | 200 | 250 | 35 | 50 | 600 |
| | 575V [Hp] | 60 | 60 | 20 | 50 | 75 | 100 | 125 | 125 | 150 | 150 | 200 | 250 | 300 | 40 | 60 | 700 |

★ Values in () with ‡ 415 V: values in () AC-3 and AC-4 lifespan -25 % increased cross-section and cable lug

| | | | | | | | | | | | | | |
|-------------|--------------|---|-----------|----|----|----|------------------------|----|----|----|----|----|----|
| | | | 100/104-K | | | | 100/104-C, 100S/104S-C | | | | | | |
| | | | 05 | 09 | 12 | 09 | 12 | 16 | 23 | 30 | 37 | 43 | 60 |
| Coil Type : | Conventional | — | X | X | X | X | X | X | X | X | X | X | X |
| | Electronic | — | — | — | — | — | — | — | — | — | — | — | — |
| | EI | — | — | — | — | — | — | — | — | — | — | — | — |

Switching of 3-phase Motors, (50Hz); Ambient temperature 60 °C, AC-4

| | | | | | | | | | | | | |
|------|-----|-----|------|------|----|----|----|------|----|----|----|----|
| 230V | [A] | 6.3 | 11.3 | 11.3 | 12 | 15 | 20 | 26.5 | 35 | 38 | 44 | 62 |
| 240V | [A] | 6.3 | 11.3 | 11.3 | 12 | 15 | 20 | 26.5 | 35 | 38 | 44 | 62 |
| 400V | [A] | 4.9 | 8.5 | 11.5 | 9 | 12 | 16 | 23 | 30 | 37 | 43 | 60 |
| 415V | [A] | 4.9 | 8.5 | 11.5 | 9 | 12 | 16 | 23 | 30 | 37 | 43 | 60 |

| | | | | | | | | | | | | |
|-------------------------------------------------|-------|------|------|------|------|------|------|------|------|------|------|------|
| 500V | [A] | 3.9 | 6.8 | 9.2 | 7 | 10 | 14 | 20 | 25 | 30 | 38 | 55 |
| 690V | [A] | 2.8 | 4.9 | 6.7 | 5 | 7 | 9 | 12 | 18 | 21 | 25 | 34 |
| 1000V | [A] | — | — | — | — | — | — | — | — | — | — | — |
| 230V | [kW] | 1.5 | 3 | 3 | 3 | 4 | 5.5 | 7.5 | 10 | 11 | 13 | 18.5 |
| 240V | [kW] | 1.5 | 3 | 3 | 3 | 4 | 5.5 | 7.5 | 10 | 11 | 13 | 18.5 |
| 400V | [kW] | 2.2 | 4 | 5.5 | 4 | 5.5 | 7.5 | 11 | 15 | 18.5 | 22 | 32 |
| 415V | [kW] | 2.2 | 4 | 5.5 | 4 | 5.5 | 7.5 | 11 | 15 | 20 | 22 | 32 |
| 500V | [kW] | 2.2 | 4 | 5.5 | 4 | 5.5 | 7.5 | 13 | 15 | 20 | 25 | 37 |
| 690V | [kW] | 2.2 | 4 | 5.5 | 4 | 5.5 | 7.5 | 10 | 15 | 18.5 | 22 | 32 |
| 1000V | [kW] | — | — | — | — | — | — | — | — | — | — | — |
| Electronic — EI | | | | | | | | | | | | |
| AC-4 at approximately 200,000 operations | | | | | | | | | | | | |
| 230V | [A] | 2.3 | 3.9 | 3.9 | 4.3 | 6.6 | 9 | 9 | 12 | 14 | 16.5 | 25.5 |
| 240V | [A] | 2.3 | 3.9 | 3.9 | 4.3 | 6.6 | 9 | 9 | 12 | 14 | 16.5 | 25.5 |
| 400/415V | [A] | 2 | 3.6 | 3.6 | 4.3 | 6.6 | 9 | 9 | 12 | 14 | 16.5 | 25.5 |
| 500V | [A] | 1.9 | 3.2 | 3.2 | 4.3 | 6.6 | 9 | 9 | 12 | 14 | 16.5 | 25.5 |
| 690V | [A] | — | — | — | 4.3 | 6.6 | 9 | 9 | 12 | 14 | 16.5 | 25.5 |
| 1000V | [A] | — | — | — | — | — | — | — | — | — | — | — |
| 230V★ | [kW] | 0.37 | 0.75 | 0.75 | 0.75 | 1.5 | 2.2 | 2.2 | 3 | 3.7 | 4 | 6.3 |
| 240V★ | [kW] | 0.37 | 0.75 | 0.75 | 0.75 | 1.5 | 2.2 | 2.2 | 3 | 4 | 4 | 7.5 |
| 400V★ | [kW] | 0.75 | 1.5 | 1.5 | 1.8 | 3 | 4 | 4 | 5.5 | 6.3 | 7.5 | 13 |
| 415V★ | [kW] | 0.75 | 1.5 | 1.5 | 1.8 | 3 | 4 | 4 | 5.5 | 6.3 | 7.5 | 13 |
| 500V★ | [kW] | 0.75 | 1.5 | 1.5 | 2.2 | 3.7 | 5.5 | 5.5 | 7.5 | 7.5 | 10 | 15 |
| 690V★ | [kW] | — | — | — | 3 | 5.5 | 7.5 | 7.5 | 10 | 11 | 15 | 22 |
| 1000V★ | [kW] | — | — | — | — | — | — | — | — | — | — | — |
| Max. switching frequency | Ops/h | 250 | 250 | 250 | 250 | 250 | 220 | 200 | 200 | 200 | 200 | 120 |
| Wye-Delta (60 Hz) | | | | | | | | | | | | |
| 200V | [Hp] | 2.2 | 3 | 5 | 5 | 5 | 7? | 7? | 10 | 15 | 20 | 30 |
| 230V | [Hp] | 2.2 | 3 | 5 | 5 | 7? | 10 | 10 | 15 | 20 | 25 | 40 |
| 460V | [Hp] | 5 | 7.5 | 10 | 10 | 15 | 20 | 25 | 30 | 40 | 50 | 75 |
| 575V | [Hp] | 5 | 7.5 | 10 | 10 | 15 | 20 | 25 | 30 | 40 | 50 | 75 |
| UL/CSA Elevator Duty* | | | | | | | | | | | | |
| 200V | [A] | — | — | — | 7.8 | 11.0 | 11.0 | 17.5 | 25.3 | 25.3 | 32.2 | 32.2 |
| 230V | [A] | — | — | — | 6.8 | 9.6 | 15.2 | 15.2 | 22.0 | 28.0 | 28.0 | 42.0 |
| 460V | [A] | — | — | — | 7.6 | 11.0 | 14.0 | 21.0 | 27.0 | 27.0 | 34.0 | 40.0 |
| 575V | [A] | — | — | — | 6.1 | 9.0 | 11.0 | 17.0 | 22.0 | 27.0 | 32.0 | 41.0 |
| 200V | [Hp] | — | — | — | 2 | 3 | 3 | 5 | 7? | 7? | 10 | 10 |
| 230V | [Hp] | — | — | — | 2 | 3 | 5 | 5 | 7? | 10 | 10 | 15 |
| 460V | [Hp] | — | — | — | 5 | 7? | 10 | 15 | 20 | 20 | 25 | 30 |
| 575V | [Hp] | — | — | — | 5 | 7? | 10 | 15 | 20 | 25 | 30 | 40 |
| Star-Delta Starting (50 Hz) | | | | | | | | | | | | |
| ≤ 230V | [A] | 11.3 | 20 | 20 | 21 | 26 | 35 | 46 | 61 | 66 | 76 | 107 |
| ≤ 240V | [A] | 11.3 | 20 | 20 | 21 | 26 | 35 | 46 | 61 | 66 | 76 | 107 |
| 400V | [A] | 8.5 | 15.5 | 15.5 | 16 | 21 | 28 | 40 | 52 | 64 | 74 | 104 |
| 415V | [A] | 8.5 | 15.5 | 15.5 | 16 | 21 | 28 | 40 | 52 | 64 | 74 | 104 |
| 500V | [A] | 6.8 | 12.4 | 12.4 | 12 | 17 | 24 | 35 | 43 | 52 | 66 | 95 |
| 690V | [A] | 4.9 | 8.9 | 8.9 | 8.6 | 12 | 16 | 21 | 31 | 36 | 43 | 59 |
| 1000V | [A] | — | — | — | — | — | — | — | — | — | — | — |
| 230V★ | [kW] | 3 | 5.5 | 5.5 | 5.5 | 7.5 | 10 | 13 | 17 | 20 | 22 | 32 |
| 240V★ | [kW] | 3 | 5.5 | 5.5 | 5.5 | 7.5 | 10 | 13 | 18.5 | 20 | 22 | 32 |
| 400V★ | [kW] | 4 | 7.5 | 10 | 7.5 | 10 | 13 | 20 | 25 | 32 | 40 | 55 |
| 415V★ | [kW] | 4 | 7.5 | 11 | 7.5 | 11 | 15 | 22 | 25 | 37 | 40 | 55 |
| 500V★ | [kW] | 4 | 7.5 | 7.5 | 7.5 | 11 | 15 | 22 | 25 | 32 | 45 | 63 |

| | | | | | | | | | | | |
|-------------|---|-----|-----|-----|----|----|------|----|----|----|----|
| 690V★ [kW] | 4 | 7.5 | 7.5 | 7.5 | 10 | 13 | 18.5 | 25 | 32 | 40 | 55 |
| 1000V★ [kW] | — | — | — | — | — | — | — | — | — | — | — |

★ Power ratings at 50 Hz: Preferred values according to IEC 60072-1 ✱ Approval pending on Cat. No. 100-D210...D860.

| | | 100/104-100/104-D, 100S-D | | | | | | | | | | | | | | | |
|---------------------------------------------------------------------------|-----------------|-----------------------------------------------------------------------------|----|-------|--------|--------|--------|--------|--------|--------|--------|--------|----|----|----|---|---|
| | | C, 100S/10 | | | | | | | | | | | | | | | |
| | | 4S-C | | | | | | | | | | | | | | | |
| | | 72 | 85 | 95 | 110 | 140 | 140 | 180 | 180 | 210 | 250 | 300 | 42 | 63 | 86 | | |
| | | | | | | | | | | | | | 0 | 0 | 0 | | |
| Coil Type : | Conventional | X | X | X | X | X | — | X | — | — | — | — | — | — | — | — | — |
| | Electronic — EI | — | — | X | X | — | X | — | X | X | X | X | X | X | X | X | X |
| Switching of 3-phase Motors, (50Hz) Ambient temperature 60°C, AC-4 | Electronic — EI | Switching of 3-phase Motors, (50Hz); Ambient temperature 60 °C, AC-4 | | | | | | | | | | | | | | | |
| | 230V [A] | 72 | 85 | 95 | 110 | 140 | 140 | 180 | 180 | 210 | 250 | 300 | 42 | — | — | — | — |
| | 240V [A] | 72 | 85 | 95 | 110 | 140 | 140 | 180 | 180 | 210 | 250 | 300 | 42 | — | — | — | — |
| | 400V [A] | 72 | 85 | 95 | 110 | 140 | 140 | 180 | 180 | 210 | 250 | 300 | 42 | — | — | — | — |
| | 415V [A] | 72 | 85 | 95 | 110 | 140 | 140 | 180 | 180 | 210 | 250 | 300 | 42 | — | — | — | — |
| | | | | | (130)✱ | (155)✱ | (155)✱ | (189)‡ | (189)‡ | (227)✱ | (258)✱ | (315)✱ | 0 | | | | |
| | 500V [A] | 67 | 80 | 85 | 105 | 115 | 140 | 140 | 170 | 210 | 250 | 300 | 36 | — | — | — | — |
| | 690V [A] | 42 | 49 | 85 | 105 | 115 | 140 | 140 | 170 | 210 | 250 | 300 | 36 | — | — | — | — |
| | 1000V [A] | — | — | 33 | 40 | 55 | 55 | 65 | 65 | 80 | 95 | 115 | 16 | — | — | — | — |
| | 230V [kW] | 22 | 25 | 30 | 34 | 45 | 45 | 57 | 57 | 67 | 80 | 97 | 13 | — | — | — | — |
| | 240V [kW] | 22 | 25 | 31 | 36 | 47 | 47 | 60 | 60 | 70 | 83 | 101 | 14 | — | — | — | — |
| | 400V [kW] | 40 | 45 | 53 | 61 | 78 | 78 | 100 | 100 | 118 | 140 | 170 | 23 | — | — | — | — |
| | 415V [kW] | 40 | 45 | 55 | 63 | 82 | 82 | 105 | 105 | 125 | 145 | 176 | 25 | — | — | — | — |
| | | | | (75)✱ | (90)✱ | (90)✱ | (110)✱ | (110)✱ | (132)✱ | (150)✱ | (185)✱ | 0 | | | | | |
| 500V [kW] | 45 | 55 | 59 | 73 | 80 | 98 | 98 | 119 | 147 | 177 | 213 | 25 | — | — | — | — | |
| 690V [kW] | 40 | 45 | 81 | 102 | 110 | 135 | 135 | 167 | 205 | 250 | 293 | 35 | — | — | — | — | |
| 1000V [kW] | — | — | 45 | 55 | 75 | 75 | 90 | 90 | 110 | 132 | 160 | 22 | — | — | — | — | |
| AC-4 at approximately 200,000 | Electronic — EI | Electronic — EI | | | | | | | | | | | | | | | |
| 230V [A] | 31 | 38 | 43 | 50 | 60 | 60 | 67 | 67 | 85 | 105 | 140 | 17 | — | — | — | — | |
| | | | | | | | | | | | | 0 | | | | | |

| | | | | | | | | | | | | | | | | |
|------------------------------|------------|------------------------------|------|------|------|-----|------|------|-----|-----|-----|-----|-----|----|---|---|
| operations | 240V | [A] | 31 | 38 | 43 | 50 | 60 | 60 | 67 | 67 | 85 | 105 | 140 | 17 | — | — |
| | | | | | | | | | | | | | | 0 | | |
| | 400/415V | [A] | 31 | 38 | 43 | 50 | 60 | 60 | 67 | 67 | 85 | 105 | 140 | 17 | — | — |
| | | | | | | | | | | | | | | 0 | | |
| | 500V | [A] | 31 | 38 | 43 | 50 | 60 | 60 | 67 | 67 | 85 | 105 | 140 | 17 | — | — |
| | | | | | | | | | | | | | | 0 | | |
| | 690V | [A] | 31 | 38 | 43 | 50 | 60 | 60 | 67 | 67 | 85 | 105 | 140 | 17 | — | — |
| | | | | | | | | | | | | | | 0 | | |
| | 1000V | [A] | — | — | 19 | 23 | 37 | 37 | 43 | 43 | 60 | 72 | 85 | 10 | — | — |
| | | | | | | | | | | | | | | 5 | | |
| | 230V | [kW | 7.5 | 11 | 13 | 15 | 17 | 17 | 20 | 20 | 25 | 32 | 45 | 55 | — | — |
| | ★ |] | | | | | | | | | | | | | | |
| | 240V | [kW | 7.5 | 11 | 13 | 15 | 18.5 | 18.5 | 22 | 22 | 25 | 32 | 45 | 55 | — | — |
| | ★ |] | | | | | | | | | | | | | | |
| | 400V | [kW | 15 | 20 | 22 | 25 | 32 | 32 | 37 | 37 | 45 | 55 | 75 | 90 | — | — |
| | ★ |] | | | | | | | | | | | | | | |
| | 415V | [kW | 17 | 20 | 22 | 25 | 32 | 32 | 37 | 37 | 50 | 55 | 80 | 10 | — | — |
| | ★ |] | | | | | | | | | | | | 0 | | |
| | 500V | [kW | 20 | 25 | 25 | 32 | 40 | 40 | 45 | 45 | 55 | 75 | 100 | 11 | — | — |
| | ★ |] | | | | | | | | | | | | 0 | | |
| | 690V | [kW | 25 | 32 | 40 | 45 | 55 | 55 | 63 | 63 | 80 | 100 | 132 | 16 | — | — |
| | ★ |] | | | | | | | | | | | | 0 | | |
| | 1000V | [kW | — | — | 22 | 30 | 50 | 50 | 55 | 55 | 80 | 100 | 110 | 15 | — | — |
| | ★ |] | | | | | | | | | | | | 0 | | |
| Max. switching frequency | Ops | /h | 120 | 120 | 120 | 120 | 120 | 120 | 100 | 100 | 120 | 100 | 70 | 70 | — | — |
| Wye-Delta (60 Hz) | Electronic | Electronic | — | EI | | | | | | | | | | | | |
| | 200V | [Hp | 40 | 50 | 40 | 60 | 60 | 60 | 75 | 75 | 100 | 125 | 175 | 25 | — | — |
| | |] | | | | | | | | | | | | 0 | | |
| | 230V | [Hp | 50 | 60 | 50 | 60 | 75 | 75 | 100 | 100 | 125 | 175 | 200 | 25 | — | — |
| | |] | | | | | | | | | | | | 0 | | |
| | 460V | [Hp | 100 | 125 | 100 | 125 | 175 | 175 | 200 | 200 | 250 | 350 | 450 | 60 | — | — |
| | |] | | | | | | | | | | | | 0 | | |
| | 575V | [Hp | 100 | 125 | 125 | 150 | 200 | 200 | 250 | 250 | 300 | 450 | 500 | 65 | — | — |
| | |] | | | | | | | | | | | | 0 | | |
| UL/CSA Elevator Duty* | Electronic | UL/CSA Elevator Duty* | | | | | | | | | | | | | | |
| | — | EI | | | | | | | | | | | | | | |
| | 200V | [A] | 48.3 | 62.1 | 62.1 | 78 | 92 | 92 | 120 | 120 | 150 | 150 | 177 | 22 | — | — |
| | | | | | | | | | | | | | | 1 | | |
| | 230V | [A] | 54.0 | 68.0 | 68.0 | 80 | 104 | 104 | 130 | 130 | 130 | 154 | 192 | 24 | — | — |
| | | | | | | | | | | | | | | 8 | | |
| | 460V | [A] | 52.0 | 65.0 | 65.0 | 77 | 96 | 96 | 124 | 124 | 156 | 180 | 180 | 24 | — | — |
| | | | | | | | | | | | | | | 0 | | |
| | 575V | [A] | 52.0 | 62.0 | 62.0 | 77 | 77 | 77 | 99 | 99 | 125 | 144 | 192 | 24 | — | — |
| | | | | | | | | | | | | | | 2 | | |
| | 200V | [Hp | 15 | 20 | 20 | 25 | 30 | 30 | 40 | 40 | 50 | 50 | 60 | 75 | — | — |
| | |] | | | | | | | | | | | | | | |
| | 230V | [Hp | 20 | 25 | 25 | 30 | 40 | 40 | 50 | 50 | 50 | 60 | 75 | 10 | — | — |
| | |] | | | | | | | | | | | | 0 | | |
| | 460V | [Hp | 40 | 50 | 50 | 60 | 75 | 75 | 100 | 100 | 125 | 150 | 150 | 20 | — | — |
| | |] | | | | | | | | | | | | 0 | | |

| | | | | | | | | | | | | | | | |
|-----------------------------------------------|-----|-----|-----|-----|-------|-------|-------|-------|-------|-------|-------|-------|----|---|---|
| 575V | [Hp | 50 | 60 | 60 | 75 | 75 | 75 | 100 | 100 | 125 | 150 | 200 | 25 | — | — |
| |] | | | | | | | | | | | | 0 | | |
| Electronic Star-Delta Starting (50 Hz) | | | | | | | | | | | | | | | |
| — EI | | | | | | | | | | | | | | | |
| ≤ 230V | [A] | 125 | 147 | 165 | 191 | 242 | 242 | 312 | 312 | 364 | 433 | 520 | 72 | — | — |
| | | | | | | | | | | | | | 7 | | |
| ≤ 240V | [A] | 125 | 147 | 165 | 191 | 242 | 242 | 312 | 312 | 364 | 433 | 520 | 72 | — | — |
| | | | | | | | | | | | | | 7 | | |
| 400V | [A] | 125 | 147 | 165 | 191 | 242 | 242 | 312 | 312 | 364 | 433 | 520 | 72 | — | — |
| | | | | | | | | | | | | | 7 | | |
| 415V | [A] | 125 | 147 | 165 | 191 | 242 | 242 | 312 | 312 | 364 | 433 | 520 | 72 | — | — |
| | | | | | (225) | (268) | (268) | (332) | (332) | (393) | (447) | (546) | 7 | | |
| | | | | | ✱ | ✱ | ✱ | ‡ | ‡ | ✱ | ✱ | ✱ | | | |
| 500V | [A] | 116 | 139 | 165 | 191 | 199 | 242 | 312 | 312 | 364 | 433 | 520 | 72 | — | — |
| | | | | | | | | | | | | | 7 | | |
| 690V | [A] | 73 | 85 | 165 | 191 | 199 | 242 | 312 | 312 | 364 | 433 | 520 | 72 | — | — |
| | | | | | | | | | | | | | 7 | | |
| 1000V | [A] | — | — | 57 | 69 | 95 | 95 | 113 | 113 | 139 | 165 | 200 | 27 | — | — |
| | | | | | | | | | | | | | 7 | | |
| 230V | [kW | 37 | 45 | 45 | 55 | 75 | 75 | 90 | 90 | 110 | 132 | 160 | 22 | — | — |
| ★ |] | | | | | | | | | | | | 0 | | |
| 240V | [kW | 40 | 50 | 50 | 63 | 80 | 80 | 100 | 100 | 125 | 150 | 160 | 25 | — | — |
| ★ |] | | | | | | | | | | | | 0 | | |
| 400V | [kW | 63 | 80 | 80 | 100 | 132 | 132 | 160 | 160 | 200 | 250 | 300 | 42 | — | — |
| ★ |] | | | | | | | | | | | | 5 | | |
| 415V | [kW | 63 | 80 | 80 | 100 | 132 | 132 | 160 | 160 | 220 | 250 | 315 | 42 | — | — |
| ★ |] | | | | (90) | (132) | (160) | (160) | | | | (335) | 5 | | |
| | | | | | ✱ | ✱ | ✱ | ✱ | | | | ✱ | | | |
| 500V | [kW | 80 | 90 | 100 | 132 | 132 | 160 | 200 | 200 | 250 | 315 | 375 | 53 | — | — |
| ★ |] | | | | | | | | | | | | 0 | | |
| 690V | [kW | 63 | 80 | 132 | 160 | 200 | 220 | 300 | 300 | 355 | 425 | 530 | 75 | — | — |
| ★ |] | | | | | | | | | | | | 0 | | |
| 1000V | [kW | — | — | 75 | 90 | 132 | 132 | 160 | 160 | 200 | 220 | 280 | 40 | — | — |
| ★ |] | | | | | | | | | | | | 0 | | |

✱ 415V: Values in () AC-3 and AC-4 lifespan -25%

| | | 100/104-K100/104-C, 100S/104S-C | | | | | | | | | | | | | |
|-------------|-----------------|---------------------------------|----|----|----|----|----|----|----|----|----|----|--|--|--|
| | | 05 | 09 | 12 | 09 | 12 | 16 | 23 | 30 | 37 | 43 | 60 | | | |
| Coil Type : | Conventional | X | X | X | X | X | X | X | X | X | X | X | | | |
| | Electronic — EI | — | — | — | — | — | — | — | — | — | — | — | | | |

**Switching of Power Transformers,
AC-6a (50 Hz)**

Inrush Current = n

Rated transformer
current

| | | | | | | | | | | | | | | | |
|--------|--------|-----|-----|-----|-----|------|------|------|------|----|----|-----|--|--|--|
| n = 30 | ≤ 230V | [A] | 2.9 | 5.4 | 5.4 | 10.9 | 10.9 | 10.9 | 10.9 | 20 | 23 | 40. | | | |
| | | | | | | | | | | | | 8 | | | |
| | ≤ 240V | [A] | 2.9 | 5.4 | 5.4 | 10.9 | 10.9 | 10.9 | 10.9 | 20 | 23 | 40. | | | |
| | | | | | | | | | | | | 8 | | | |
| | ≤ 400V | [A] | 2.4 | 4.1 | 5.4 | 10.9 | 10.9 | 10.9 | 10.9 | 20 | 23 | 40. | | | |

| | | | | | | | | | | | | |
|--------------------------------------------------|---------|-------|-----|-----|-----|------|------|------|------|------|------|------|
| | ≤ 415V | [A] | 2.4 | 4.1 | 5.4 | 10.9 | 10.9 | 10.9 | 10.9 | 20 | 23 | 40.8 |
| | ≤ 500V | [A] | 1.8 | 3.2 | 3.2 | 10.9 | 10.9 | 10.9 | 10.9 | 20 | 23 | 40.8 |
| | ≤ 690V | [A] | — | — | — | 10.9 | 10.9 | 10.9 | 10.9 | 20 | 23 | 40.8 |
| | ≤ 1000V | [A] | — | — | — | — | — | — | — | — | — | — |
| | 230V | [kVA] | 1.2 | 2 | 4.3 | 4.3 | 4.3 | 4.3 | 8 | 8 | 9.2 | 16 |
| | 240V | [kVA] | 1.2 | 2 | 4.5 | 4.5 | 4.5 | 4.5 | 8.3 | 8.3 | 10 | 17 |
| | 400V | [kVA] | 1.7 | 2.8 | 3.4 | 7.5 | 7.5 | 7.5 | 14 | 14 | 16 | 28 |
| | 415V | [kVA] | 1.7 | 2.8 | 3.4 | 7.8 | 7.8 | 7.8 | 14 | 14 | 17 | 29 |
| | 500V | [kVA] | 1.7 | 2.8 | 3.4 | 9.4 | 9.4 | 9.4 | 17 | 17 | 20 | 35 |
| | 690V | [kVA] | 2 | 4 | 5 | 13 | 13 | 13 | 24 | 24 | 27 | 49 |
| | 1000V | [kVA] | — | — | — | — | — | — | — | — | — | — |
| n = 20 | ≤ 690V | [A] | — | — | — | 16.3 | 16.3 | 16.3 | 16.3 | 30 | 34.5 | 61.3 |
| n = 15 | ≤ 690V | [A] | — | — | — | 22 | 22 | 22 | 22 | 40 | 40 | 46 |
| 60 Hz Peak Inrush/peak rated transformer current | | | | | | | | | | | | |
| | n = 30 | [A] | — | — | — | 10.9 | 10.9 | 10.9 | 10.9 | 20 | 23 | 40.8 |
| | 200V | [kVA] | — | — | — | 3.8 | 3.8 | 3.8 | 3.8 | 6.9 | 6.9 | 8.0 |
| | 208V | [kVA] | — | — | — | 3.9 | 3.9 | 3.9 | 3.9 | 7.2 | 7.2 | 8.3 |
| | 240V | [kVA] | — | — | — | 4.5 | 4.5 | 4.5 | 4.5 | 8.3 | 8.3 | 9.6 |
| | 480V | [kVA] | — | — | — | 9.1 | 9.1 | 9.1 | 9.1 | 16.6 | 16.6 | 19.3 |
| | 600V | [kVA] | — | — | — | 11.3 | 11.3 | 11.3 | 11.3 | 20.8 | 20.8 | 23.9 |
| | 660V | [kVA] | — | — | — | 12.5 | 12.5 | 12.5 | 12.5 | 22.9 | 22.9 | 26.3 |
| 60 Hz Peak Inrush/peak rated transformer current | | | | | | | | | | | | |
| | n = 20 | [A] | — | — | — | 16.3 | 16.3 | 16.3 | 16.3 | 30 | 34.5 | 61.3 |
| | 200V | [kVA] | — | — | — | 5.6 | 5.6 | 5.6 | 5.6 | 10.4 | 10.4 | 12.0 |
| | 208V | [kVA] | — | — | — | 5.9 | 5.9 | 5.9 | 5.9 | 10.8 | 10.8 | 12.4 |
| | 240V | [kVA] | — | — | — | 6.8 | 6.8 | 6.8 | 6.8 | 12.5 | 12.5 | 14.3 |
| | 480V | [kVA] | — | — | — | 13.6 | 13.6 | 13.6 | 13.6 | 24.9 | 24.9 | 28.7 |
| | 600V | [kVA] | — | — | — | 16.9 | 16.9 | 16.9 | 16.9 | 31.2 | 31.2 | 35.9 |
| | 660V | [kVA] | — | — | — | 18.6 | 18.6 | 18.6 | 18.6 | 34.3 | 34.3 | 39.4 |
| 60 Hz Peak Inrush/peak rated transformer current | | | | | | | | | | | | |
| | n=15 | [A] | — | — | — | 22 | 22 | 22 | 22 | 40 | 40 | 46 |
| | 200V | [kVA] | — | — | — | 7.5 | 7.5 | 7.5 | 7.5 | 13.9 | 13.9 | 15.9 |
| | 208V | [kVA] | — | — | — | 7.8 | 7.8 | 7.8 | 7.8 | 14.4 | 14.4 | 16.2 |

Inrush/peak rated EI
transformer
current

| | | | | | | | | | | | | | | |
|------------|------|------|------|------|------|------|-------|-------|-------|-------|-------|-------|---|---|
| n = 30 [A] | 40.8 | 40.8 | 53 | 60 | 70 | 70 | 85 | 85 | 105 | 125 | 150 | 210 | — | — |
| 200V [kVA] | 14.4 | 14.4 | 18.4 | 20.8 | 22.4 | 22.9 | 42.9 | 43.6 | 44.3 | 52.0 | 72.7 | — | — | — |
| 208V [kVA] | 14.7 | 14.7 | 19.1 | 21.6 | 22.5 | 23.0 | 63.0 | 63.7 | 84.5 | 105.4 | 175.7 | — | — | — |
| 240V [kVA] | 17.0 | 17.0 | 22.0 | 24.9 | 29.1 | 29.1 | 135.3 | 135.3 | 343.6 | 52.0 | 62.4 | 487.3 | — | — |
| 480V [kVA] | 33.9 | 33.9 | 44.1 | 49.9 | 58.2 | 58.2 | 270.7 | 270.7 | 787.3 | 104.1 | 125.1 | 175.1 | — | — |
| 600V [kVA] | 42.4 | 42.4 | 55.1 | 62.4 | 72.7 | 72.7 | 388.3 | 388.3 | 109.1 | 130.1 | 156.2 | 218.1 | — | — |
| 660V [kVA] | 46.6 | 46.6 | 60.6 | 68.6 | 80.0 | 80.0 | 297.2 | 297.2 | 120.1 | 143.1 | 171.2 | 240.1 | — | — |

60 Hz Peak Electronic — 60 Hz Peak Inrush/peak rated transformer current

Inrush/peak rated EI
transformer
current

| | | | | | | | | | | | | | | |
|------------|------|------|------|-------|-------|-------|-------|-------|-------|-------|-------|-------|---|---|
| n = 20 [A] | 61.3 | 61.3 | 80 | 90 | 105 | 105 | 128 | 128 | 158 | 188 | 225 | 315 | — | — |
| 200V [kVA] | 21.2 | 21.2 | 27.7 | 31.2 | 36.4 | 36.4 | 44.3 | 44.3 | 54.7 | 65.1 | 77.9 | 109.1 | — | — |
| 208V [kVA] | 22.1 | 22.1 | 28.8 | 32.4 | 37.8 | 37.8 | 46.1 | 46.1 | 56.9 | 67.7 | 81.1 | 113.1 | — | — |
| 240V [kVA] | 25.5 | 25.5 | 33.3 | 37.4 | 43.6 | 43.6 | 53.2 | 53.2 | 65.7 | 77.8 | 93.5 | 131.1 | — | — |
| 480V [kVA] | 51.0 | 51.0 | 66.5 | 74.8 | 87.3 | 87.3 | 106.1 | 106.1 | 131.1 | 156.1 | 187.1 | 262.1 | — | — |
| 600V [kVA] | 63.7 | 63.7 | 83.1 | 93.5 | 109.1 | 109.1 | 133.1 | 133.1 | 164.1 | 195.1 | 234.1 | 327.1 | — | — |
| 660V [kVA] | 70.1 | 70.1 | 91.5 | 103.1 | 120.1 | 120.1 | 146.1 | 146.1 | 181.1 | 215.1 | 257.1 | 360.1 | — | — |

60 Hz Peak Electronic — 60 Hz Peak Inrush/peak rated transformer current

Inrush/peak rated EI
transformer
current

| | | | | | | | | | | | | | | |
|------------|------|------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|---|---|
| n=15 [A] | 82 | 82 | 107 | 120 | 140 | 140 | 170 | 170 | 210 | 250 | 300 | 420 | — | — |
| 200V [kVA] | 28.4 | 28.4 | 37.1 | 41.6 | 48.5 | 48.5 | 58.9 | 58.9 | 72.7 | 86.6 | 104.1 | 145.1 | — | — |
| 208V [kVA] | 29.5 | 29.5 | 38.5 | 43.2 | 50.4 | 50.4 | 61.2 | 61.2 | 75.0 | 89.1 | 108.1 | 151.1 | — | — |
| 240V [kVA] | 34.1 | 34.1 | 44.5 | 49.9 | 58.2 | 58.2 | 70.7 | 70.7 | 87.3 | 104.1 | 125.1 | 175.1 | — | — |
| 480V [kVA] | 68.2 | 68.2 | 89.0 | 99.8 | 116.1 | 116.1 | 141.1 | 141.1 | 175.1 | 208.1 | 249.1 | 349.1 | — | — |
| 600V [kVA] | 85.2 | 85.2 | 111.1 | 125.1 | 145.1 | 145.1 | 177.1 | 177.1 | 218.1 | 260.1 | 312.1 | 436.1 | — | — |
| 660V [kVA] | 93.7 | 93.7 | 122.1 | 137.1 | 160.1 | 160.1 | 194.1 | 194.1 | 240.1 | 286.1 | 343.1 | 480.1 | — | — |

| | | | | | | | | | | | | | | | | |
|-------------|-----------------|-----------|----|------------------------|----|----|----|----|----|----|-----|-----|-----|-----|----|----|
| | | 100/104-K | | 100/104-C, 100S/104S-C | | | | | | | | | | | | |
| | | 05 | 09 | 12 | 09 | 12 | 16 | 23 | 30 | 37 | 40* | 200 | 40* | 400 | 43 | 60 |
| Coil Type : | Conventional | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X |
| | Electronic — EI | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |

Switching of 3-phase Capacitors, AC-6b (50 Hz)★

| | | | | | | | | | | | | | | | |
|---------------------------|--------------|---|---|---|---|----|------|------|------|------|---|---|----|----|----|
| Single capacitor 40 °C | 230V [kVar] | — | — | — | 8 | 8 | 8.5 | 9 | 14 | 14 | — | — | — | 24 | 28 |
| | 240V [kVar] | — | — | — | 8 | 8 | 8.5 | 9 | 14 | 14 | — | — | — | 25 | 29 |
| | 400V [kVar] | — | — | — | 8 | 8 | 10 | 12.5 | 20 | 24 | — | — | — | 35 | 48 |
| | 415V [kVar] | — | — | — | 8 | 8 | 10 | 12.5 | 20 | 25 | — | — | — | 35 | 50 |
| | 500V [kVar] | — | — | — | 8 | 8 | 10 | 12.5 | 20 | 25 | — | — | — | 35 | 50 |
| | 690V [kVar] | — | — | — | 8 | 8 | 10 | 12.5 | 20 | 25 | — | — | — | 35 | 50 |
| 60 °C | 1000V [kVar] | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| | 230V [kVar] | — | — | — | 8 | 8 | 8.5 | 9 | 12.5 | 12.5 | — | — | — | 18 | 28 |
| | 240V [kVar] | — | — | — | 8 | 8 | 8.5 | 9 | 12.5 | 12.5 | — | — | — | 18 | 29 |
| | 400V [kVar] | — | — | — | 8 | 8 | 10 | 12.5 | 20 | 21.5 | — | — | — | 30 | 42 |
| | 415V [kVar] | — | — | — | 8 | 8 | 10 | 12.5 | 20 | 22 | — | — | — | 30 | 42 |
| | 500V [kVar] | — | — | — | 8 | 8 | 10 | 12.5 | 20 | 25 | — | — | — | 30 | 42 |
| 690V [kVar] | — | — | — | 8 | 8 | 10 | 12.5 | 20 | 25 | — | — | — | 30 | 42 | |

| | | | | | | | | | | | | | | | |
|--------------------------------|--------------------------------|--------|--------|---|---|---|---|---|----|------|------|------|---|-------|-------|
| Group capacitors 40 °C | 1000V | [kVar] | — | — | — | — | — | — | — | — | — | — | — | — | |
| | 230V | [kVar] | — | — | — | 5 | 5 | 8 | 9 | 12.5 | 14 | — | — | 20 28 | |
| | 240V | [kVar] | — | — | — | 5 | 5 | 8 | 9 | 12.5 | 14 | — | — | 20 29 | |
| | 400V | [kVar] | — | — | — | 5 | 5 | 8 | 10 | 15 | 20 | — | — | 25 40 | |
| | 415V | [kVar] | — | — | — | 5 | 5 | 8 | 10 | 15 | 20 | — | — | 25 40 | |
| | 500V | [kVar] | — | — | — | 5 | 5 | 8 | 10 | 15 | 20 | — | — | 25 40 | |
| | 690V | [kVar] | — | — | — | 5 | 5 | 8 | 10 | 15 | 20 | — | — | 25 40 | |
| | 60 °C | 1000V | [kVar] | — | — | — | — | — | — | — | — | — | — | — | — |
| | | 230V | [kVar] | — | — | — | 5 | 5 | 8 | 9 | 12.5 | 12.5 | — | — | 18 28 |
| | | 240V | [kVar] | — | — | — | 5 | 5 | 8 | 9 | 12.5 | 12.5 | — | — | 18 29 |
| | | 400V | [kVar] | — | — | — | 5 | 5 | 8 | 10 | 15 | 20 | — | — | 25 40 |
| | | 415V | [kVar] | — | — | — | 5 | 5 | 8 | 10 | 15 | 20 | — | — | 25 40 |
| | | 500V | [kVar] | — | — | — | 5 | 5 | 8 | 10 | 15 | 20 | — | — | 25 40 |
| | 60 Hz Single Capacitor — 40 °C | 690V | [kVar] | — | — | — | 5 | 5 | 8 | 10 | 15 | 20 | — | — | 25 40 |
| 1000V | | [kVar] | — | — | — | — | — | — | — | — | — | — | — | — | |
| 200V | | [kVar] | — | — | — | 5 | 5 | 8 | 9 | 12.5 | 14 | — | — | 20 28 | |
| 230V | | [kVar] | — | — | — | 5 | 5 | 8 | 9 | 12.5 | 14 | — | — | 20 29 | |
| 460V | | [kVar] | — | — | — | 5 | 5 | 8 | 10 | 15 | 20 | — | — | 25 40 | |
| 60 Hz Group Capacitors — 40 °C | 600V | [kVar] | — | — | — | 5 | 5 | 8 | 10 | 15 | 20 | — | — | 25 40 | |
| | 200V | [kVar] | — | — | — | 5 | 5 | 8 | 9 | 12.5 | 12.5 | — | — | 18 28 | |
| | 230V | [kVar] | — | — | — | 5 | 5 | 8 | 9 | 12.5 | 12.5 | — | — | 18 29 | |
| | 460V | [kVar] | — | — | — | 5 | 5 | 8 | 10 | 15 | 20 | — | — | 25 40 | |
| | 600V | [kVar] | — | — | — | 5 | 5 | 8 | 10 | 15 | 20 | — | — | 25 40 | |

Switching of Lamps

| | | | | | | | | | | | | | | | |
|----------------------------------|----------|-----|------|------|------|------|----|----|----|------|----|----|----|----|----|
| Gas discharge lamps AC-5a, 40 °C | open | [A] | 18 | 18 | 18 | 22.5 | 25 | 28 | 29 | 40.5 | 45 | 65 | 65 | 77 | 81 |
| | enclosed | [A] | 14.5 | 14.5 | 14.5 | 22.5 | 25 | 28 | 29 | 37 | 41 | 54 | 54 | 57 | 77 |

Individually compensated:

Max. capacitance at expected

| | | | | | | | | | | | | | | | |
|--------------------------|----------|------|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|----|-----|-----|
| Short-circuit current of | 10 kA | [μF] | 750 | 750 | 750 | 1 | 1 | 1 | 1 | 2 | 2 | — | — | 3 | 4 |
| | | | | | | 000 | 000 | 000 | 000 | 700 | 700 | — | — | 200 | 000 |
| | 20 kA | [μF] | 400 | 400 | 400 | 500 | 500 | 500 | 500 | 1 | 1 | — | — | 1 | 2 |
| | | | | | | | | | | 350 | 350 | — | — | 600 | 000 |
| | 50 kA | [μF] | — | — | — | 200 | 200 | 200 | 200 | 540 | 540 | — | — | 640 | 800 |
| Filament AC-5b | 230/240V | [A] | 5 | 9 | 9 | 12 | 16 | 18 | 22 | 30 | 37 | 18 | 25 | 43 | 60 |

Switching of Low Inductive Loads in Home Appliances and Similar Applications per IEC 61095 (50 Hz)

| | | | | | | | | | | | | | | | |
|-------|------|-----|----|----|----|----|----|----|----|----|----|---|---|----|---|
| AC-7a | 230V | [A] | 20 | 20 | 20 | 32 | 32 | 32 | 32 | 45 | 45 | — | — | 63 | — |
| | 400V | [A] | 20 | 20 | 20 | 32 | 32 | 32 | 32 | 45 | 45 | — | — | 63 | — |
| | 440V | [A] | — | — | — | 32 | 32 | 32 | 32 | 45 | 45 | — | — | 63 | — |

Switching of Motor Load for Home Appliances (50 Hz)

| | | | | | | | | | | | | | | | |
|-------|------|-----|---|----|----|------|----|------|----|----|---|---|---|---|---|
| AC-7b | 230V | [A] | 6 | 11 | 11 | 10.5 | 14 | 19 | 23 | 30 | — | — | — | — | — |
| | 400V | [A] | 6 | 11 | 11 | 9 | 12 | 16 | 20 | 30 | — | — | — | — | — |
| | 440V | [A] | — | — | — | 7.5 | 10 | 13.5 | 18 | 27 | — | — | — | — | — |

★ Inductance of leads between capacitors in parallel: min. 6 μH (100-C09...C30 contactors: min 30 μH)

| | | 100S/104S-C | | | | | | | | | | | | | | | |
|-------------|-----------------|-------------|----|-------|-------|----|----|----|----|----|----|----|----|----|----|----|----|
| | | 72 | 85 | 90*20 | 90*40 | 95 | 11 | 14 | 14 | 18 | 18 | 21 | 25 | 30 | 42 | 63 | 86 |
| | | | | 0 | 0 | | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Coil Type : | Conventional | X | X | X | X | X | X | X | — | X | — | — | — | — | — | — | — |
| | Electronic — EI | — | — | — | — | — | X | X | — | X | — | X | X | X | X | X | X |

Switching of Electronic — EI Switching of 3-phase Capacitors, AC-6b (50 Hz)

3-phase Capacitors, AC-6b (50 Hz)

| | | | | | | | | | | | | | | | | | | |
|--------------------------|-------|-------|----|----|---|---|----|----|----|----|----|----|----|----|----|----|---|---|
| Single capacitor 40°C | 230V | [kVar | 28 | 28 | — | — | 45 | 45 | 70 | 70 | 70 | 70 | 98 | 98 | 12 | 13 | — | — |
| | |] | | | | | | | | | | | | | 5 | 9 | | |
| | 240V | [kVar | 29 | 29 | — | — | 47 | 47 | 73 | 73 | 73 | 73 | 10 | 10 | 13 | 14 | — | — |
| | |] | | | | | | | | | | | 2 | 2 | 1 | 5 | | |
| | 400V | [kVar | 48 | 48 | — | — | 78 | 78 | 12 | 12 | 12 | 12 | 17 | 17 | 21 | 24 | — | — |
| | |] | | | | | | | 1 | 1 | 1 | 1 | 0 | 0 | 8 | 2 | | |
| | 415V | [kVar | 50 | 50 | — | — | 81 | 81 | 12 | 12 | 12 | 12 | 17 | 17 | 22 | 25 | — | — |
| | |] | | | | | | | 6 | 6 | 6 | 6 | 6 | 6 | 6 | 2 | | |
| | 500V | [kVar | 55 | 60 | — | — | 97 | 97 | 15 | 15 | 15 | 15 | 21 | 21 | 27 | 30 | — | — |
| | |] | | | | | | | 2 | 2 | 2 | 2 | 2 | 2 | 3 | 3 | | |
| 60 °C | 690V | [kVar | 55 | 60 | — | — | 13 | 13 | 20 | 20 | 20 | 20 | 29 | 29 | 37 | 41 | — | — |
| | |] | | | | | 4 | 4 | 9 | 9 | 9 | 9 | 3 | 3 | 6 | 8 | | |
| | 1000V | [kVar | — | — | — | — | 19 | 19 | 30 | 30 | 30 | 30 | 42 | 42 | 54 | 60 | — | — |
| | |] | | | | | 4 | 4 | 3 | 3 | 3 | 3 | 4 | 4 | 6 | 6 | | |
| | 230V | [kVar | 28 | 28 | — | — | 38 | 38 | 59 | 59 | 59 | 59 | 84 | 84 | 10 | 11 | — | — |
| | |] | | | | | | | | | | | | | 6 | 9 | | |
| | 240V | [kVar | 29 | 29 | — | — | 39 | 39 | 61 | 61 | 61 | 61 | 87 | 87 | 11 | 12 | — | — |
| | |] | | | | | | | | | | | | | 1 | 4 | | |
| | 400V | [kVar | 48 | 48 | — | — | 65 | 65 | 10 | 10 | 10 | 10 | 14 | 14 | 18 | 20 | — | — |
| | |] | | | | | | | 2 | 2 | 2 | 2 | 5 | 5 | 4 | 6 | | |
| Group capacitors 40°C | 415V | [kVar | 50 | 50 | — | — | 68 | 68 | 10 | 10 | 10 | 10 | 15 | 15 | 19 | 21 | — | — |
| | |] | | | | | | | 6 | 6 | 6 | 6 | 1 | 1 | 1 | 4 | | |
| | 500V | [kVar | 50 | 55 | — | — | 82 | 82 | 12 | 12 | 12 | 12 | 18 | 18 | 23 | 25 | — | — |
| | |] | | | | | | | 7 | 7 | 7 | 7 | 2 | 2 | 0 | 8 | | |
| | 690V | [kVar | 50 | 55 | — | — | 11 | 11 | 17 | 17 | 17 | 17 | 25 | 25 | 31 | 35 | — | — |
| | |] | | | | | 3 | 3 | 6 | 6 | 6 | 6 | 1 | 1 | 8 | 6 | | |
| | 1000V | [kVar | — | — | — | — | 16 | 16 | 25 | 25 | 25 | 25 | 36 | 36 | 46 | 51 | — | — |
| | |] | | | | | 4 | 4 | 5 | 5 | 5 | 5 | 4 | 4 | 1 | 5 | | |
| | 230V | [kVar | 28 | 28 | — | — | 42 | 45 | 70 | 70 | 70 | 70 | 98 | 98 | 12 | 13 | — | — |
| | |] | | | | | | | | | | | | | 5 | 9 | | |

| | | | | | | | | | | | | | | | |
|--------------------------------------------------------------------|--------|-----------|-------|-------|-------|-------|-------|-------|-------|-------|-------|------|------|-------|------|
| poles | 48/60V | [A] | 6 | 8 | 8 | 25 | 25 | 32 | 32 | 45 | 45 | 45 | 45 | 50 | 70 |
| in | 110V | [A] | 4 | 6 | 6 | 25 | 25 | 32 | 32 | 45 | 45 | 45 | 45 | 50 | 70 |
| series | 220V | [A] | 0.8 | 1.2 | 1.2 | 8 | 8 | 8 | 10 | 10 | 10 | 10 | 10 | 10 | 15 |
| | 440V | [A] | 0.2 | 0.3 | 0.3 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1.5 |
| 3 | 24V | [A] | 6 | 9 | 9 | 25 | 25 | 32 | 32 | 45 | 45 | — | 45 | 63 | 90 |
| poles | 48/60V | [A] | 6 | 9 | 9 | 25 | 25 | 32 | 32 | 45 | 45 | — | 45 | 63 | 90 |
| in | 110V | [A] | 6 | 9 | 9 | 25 | 25 | 32 | 32 | 45 | 45 | — | 45 | 63 | 90 |
| series | 220V | [A] | 3 | 4 | 4 | 25 | 25 | 32 | 32 | 45 | 45 | — | 45 | 50 | 70 |
| | 440V | [A] | 0.4 | 0.6 | 0.6 | 3 | 3 | 3 | 3 | 3.5 | 3.5 | — | 3.5 | 4 | 5 |
| Shunt-wound Motors | | | | | | | | | | | | | | | |
| Starting, reverse current braking, reversing, stepping DC-3, 60 °C | | | | | | | | | | | | | | | |
| 3 | 24V | [A] | 5 | 9 | 9 | 25 | 25 | 32 | 32 | 45 | 45 | — | — | 63 | 90 |
| poles | 48/60V | [A] | 4 | 6 | 6 | 25 | 25 | 32 | 32 | 45 | 45 | — | — | 50 | 70 |
| in | 110V | [A] | 2 | 3 | 3 | 20 | 20 | 25 | 25 | 30 | 30 | — | — | 35 | 70 |
| series | 220V | [A] | 0.8 | 1.2 | 1.2 | 6 | 6 | 6 | 10 | 15 | 15 | — | — | 20 | 25 |
| | 440V | [A] | 0.15 | 0.2 | 0.2 | 0.6 | 0.6 | 0.6 | 0.6 | 0.6 | 0.6 | — | — | 0.6 | 0.6 |
| Series-wound Motors | | | | | | | | | | | | | | | |
| Starting, reverse current braking, reversing, stepping DC-5, 60 °C | | | | | | | | | | | | | | | |
| 3 | 24V | [A] | 5 | 9 | 9 | 25 | 25 | 32 | 32 | 45 | 45 | — | — | 63 | 90 |
| poles | 48/60V | [A] | 2 | 3 | 3 | 25 | 25 | 32 | 32 | 45 | 45 | — | — | 50 | 70 |
| in | 110V | [A] | 0.6 | 1 | 1 | 20 | 20 | 25 | 25 | 30 | 30 | — | — | 35 | 70 |
| series | 220V | [A] | 0.1 | 0.1 | 0.1 | 6 | 6 | 6 | 10 | 15 | 15 | — | — | 20 | 25 |
| | 440V | [A] | — | — | — | 0.6 | 0.6 | 0.6 | 0.6 | 0.6 | 0.6 | — | — | 0.6 | 0.6 |
| Short Time Withstand I_{CW}, 60 °C | | | | | | | | | | | | | | | |
| 10 s | [A] | | 60 | 96 | 96 | 170 | 170 | 170 | 215 | 300 | 304 | 304 | 304 | 375 | 700 |
| Resistance and Power Dissipation | | | | | | | | | | | | | | | |
| Main current | [mΩ] | | 2.2 | 2.2 | 2.2 | 2.7 | 2.7 | 2.7 | 2 | 2 | 2 | 2 | 1.5 | 1.5 | 0.9 |
| circuit | | | | | | | | | | | | | | | |
| resistance | | | | | | | | | | | | | | | |
| Power | [W] | | 0.3 | 0.9 | 0.9 | 0.66 | 1.2 | 2.1 | 3.2 | 5.4 | 8.2 | 11.3 | 8.4 | 8.3 | 9.7 |
| dissipation by | | | | | | | | | | | | | | | |
| all circuits at | | | | | | | | | | | | | | | |
| I_e AC-3/400V | | | | | | | | | | | | | | | |
| Total power dissipation | | | | | | | | | | | | | | | |
| At I_e AC | [W] | | 2.1 | 2.7 | 2.7 | 3.3 | 3.8 | 4.7 | 6.2 | 8.4 | 11.2 | 26.1 | 37.4 | 11.5 | 11 |
| AC- | | | | | | | | | | | | | | | |
| control | | | | | | | | | | | | | | | |
| 3/400 DC | [W] | | 2.9 | 3.5 | 3.5 | 6.7 | 7.2 | 8.1 | 12.4 | 14.6 | 17.4 | 32.6 | 43.9 | 18.4 | 11 |
| V | | | | | | | | | | | | | | | |
| control | | | | | | | | | | | | | | | |
| Lifespan | | | | | | | | | | | | | | | |
| Mechanica | [Mil. | | 15 | 15 | 15 | 13 | 13 | 13 | 13 | 13 | 13 | 10 | 10 | 12 | 10 |
| 1 AC | | | | | | | | | | | | | | | |
| operations] | | | | | | | | | | | | | | | |
| control | | | | | | | | | | | | | | | |
| Mechanica | [Mil. | | 15 | 15 | 15 | 13 | 13 | 13 | 13 | 13 | 13 | 10 | 10 | 13 | 10 |
| 1 DC | | | | | | | | | | | | | | | |
| operations] | | | | | | | | | | | | | | | |
| control | | | | | | | | | | | | | | | |
| Electrical | [Mil. | | 0.7 | 0.7 | 0.7 | 1.3 | 1.3 | 1.3 | 1.3 | 1.3 | 1.3 | — | — | 1 | 1 |
| AC-3 (400 operations] | | | | | | | | | | | | | | | |
| V) | | | | | | | | | | | | | | | |
| Weight | | | | | | | | | | | | | | | |
| AC | Non- | kg (lbs.) | 0.16 | 0.16 | 0.16 | 0.39 | 0.39 | 0.39 | 0.39 | 0.48 | 0.49 | — | — | 0.51 | 1.45 |
| Reversi | | | (0.35 | (0.35 | (0.35 | (0.86 | (0.86 | (0.86 | (0.86 | (1.06 | (1.08 | | | (1.12 | (3.2 |
| ng | | |) |) |) |) |) |) |) |) |) | | |) | 0) |

| | | | | | | | | | | | | | | | |
|----|---------------|-----------|--------|--------|--------|--------|--------|--------|--------|--------|--------|---|---|--------|--------|
| | Reversing | kg (lbs.) | — | — | — | 0.85 | 0.85 | 0.85 | 0.85 | 1.08 | 1.08 | — | — | 1.15 | 3.14 |
| | | | | | | (1.89) | (1.89) | (1.89) | (1.89) | (2.39) | (2.39) | | | (2.54) | (6.92) |
| DC | Non-Reversing | kg (lbs.) | 0.2 | 0.2 | 0.2 | 0.6 | 0.6 | 0.6 | 0.73 | 0.85 | 0.85 | — | — | 1.0 | 1.47 |
| | | | (0.44) | (0.44) | (0.44) | (1.32) | (1.32) | (1.32) | (1.61) | (1.87) | (1.87) | | | (2.20) | (3.24) |
| | Reversing | kg (lbs.) | — | — | — | 1.27 | 1.27 | 1.27 | 1.53 | 1.81 | 1.81 | — | — | 2.13 | 3.22 |
| | | | | | | (2.81) | (2.81) | (2.81) | (3.39) | (4.0) | (4.0) | | | (4.7) | (7.1) |

100/104-C, 100S/104S-C 100-D, 100S-D

72 85 90* 90* 95 110 140 140 180 180 210 250 300 420 63 86
200 400 0 0

| | | | | | | | | | | | | | | | | |
|-------------|--------------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Coil Type : | Conventional | X | X | X | X | X | X | X | — | X | — | — | — | — | — | — |
| | Electronic | — | — | — | — | X | X | — | X | — | X | X | X | X | X | X |
| | EI | | | | | | | | | | | | | | | |

Switching of Hermetically Sealed Cooling Compressor Motors - manual reset of overload release (50 Hz)

Hermetically Sealed Cooling Compressor Motors - manual reset of overload release (50 Hz)

| | | | | | | | | | | | | | | | | |
|--------------|----------|----|-----|---|---|---|---|---|---|---|---|---|---|---|---|---|
| AC-8a | 400V [A] | 85 | 100 | — | — | — | — | — | — | — | — | — | — | — | — | — |
| | 500V [A] | 85 | 100 | — | — | — | — | — | — | — | — | — | — | — | — | — |
| | 690V [A] | 67 | 80 | — | — | — | — | — | — | — | — | — | — | — | — | — |

- Electronic — - automatic reset of overload release

automatic reset of overload release

| | | | | | | | | | | | | | | | | |
|--------------|----------|----|----|---|---|---|---|---|---|---|---|---|---|---|---|---|
| AC-8b | 400V [A] | 30 | 35 | — | — | — | — | — | — | — | — | — | — | — | — | — |
| | 500V [A] | 30 | 35 | — | — | — | — | — | — | — | — | — | — | — | — | — |
| | 690V [A] | 30 | 35 | — | — | — | — | — | — | — | — | — | — | — | — | — |

Switching of DC Loads

Non-inductive or slightly inductive loads

Electronic —

or
resistance
furnaces
DC-1 at
60 °C

| | | | | | | | | | | | | | | | | | |
|-------------------|-------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|---|---|
| 1 pole | 24V [A] | 80 | 80 | 80 | 80 | 135 | 135 | 210 | 210 | 210 | 210 | 300 | 300 | 380 | 425 | — | — |
| | 48/60 V [A] | 40 | 40 | 40 | 40 | 135 | 135 | 210 | 210 | 210 | 210 | 300 | 300 | 380 | 425 | — | — |
| | 110V [A] | 11 | 11 | 11 | 11 | 135 | 135 | 210 | 210 | 210 | 210 | 300 | 300 | 380 | 425 | — | — |
| | 220V [A] | 2 | 2 | 1.8 | 1.8 | 3 | 3 | 3.3 | 3.3 | 3.3 | 3.3 | 4.9 | 4.9 | 4.9 | 5.2 | — | — |
| | 440V [A] | 0.5 | 0.5 | 0.5 | 0.5 | 0.6 | 0.6 | 0.7 | 0.7 | 0.7 | 0.7 | 1 | 1 | 1 | 1.2 | — | — |
| 2 poles in series | 24V [A] | 80 | 80 | 80 | 80 | 135 | 135 | 210 | 210 | 210 | 210 | 300 | 300 | 380 | 425 | — | — |
| | 48/60 V [A] | 80 | 80 | 80 | 80 | 135 | 135 | 210 | 210 | 210 | 210 | 300 | 300 | 380 | 425 | — | — |
| | 110V [A] | 80 | 80 | 80 | 80 | 135 | 135 | 210 | 210 | 210 | 210 | 300 | 300 | 380 | 425 | — | — |
| | 220V [A] | 15 | 15 | 15 | 15 | 135 | 135 | 210 | 210 | 210 | 210 | 300 | 300 | 380 | 425 | — | — |
| | 440V [A] | 1.5 | 1.5 | 1.5 | 1.5 | 3 | 3 | 3.3 | 3.3 | 3.3 | 3.3 | 4.9 | 4.9 | 4.9 | 5.2 | — | — |
| 3 poles in series | 24V [A] | 90 | 100 | — | 100 | 135 | 135 | 210 | 210 | 210 | 210 | 300 | 300 | 380 | 425 | — | — |
| | 48/60 V [A] | 90 | 100 | — | 100 | 135 | 135 | 210 | 210 | 210 | 210 | 300 | 300 | 380 | 425 | — | — |
| | 110V [A] | 90 | 100 | — | 100 | 135 | 135 | 210 | 210 | 210 | 210 | 300 | 300 | 380 | 425 | — | — |
| | 220V [A] | 80 | 80 | — | 80 | 135 | 135 | 210 | 210 | 210 | 210 | 300 | 300 | 380 | 425 | — | — |
| | 440V [A] | 5 | 5 | — | 5 | 11 | 11 | 11 | 11 | 11 | 11 | 14 | 14 | 14 | 15 | — | — |

Shunt-wound Electronic — Shunt-wound Motors
EI Starting, reverse current braking, reversing, stepping DC-3, 60 °C

Motors
Starting,
reverse
current
braking,
reversin
g,
stepping
DC-3,
60 °C

| | | | | | | | | | | | | | | | | | |
|-------------------|-------------|-----|-----|---|---|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|---|---|
| 3 poles in series | 24V [A] | 90 | 100 | — | — | 135 | 135 | 210 | 210 | 210 | 210 | 300 | 300 | 380 | 425 | — | — |
| | 48/60 V [A] | 70 | 80 | — | — | 135 | 135 | 210 | 210 | 210 | 210 | 300 | 300 | 380 | 425 | — | — |
| | 110V [A] | 70 | 80 | — | — | 135 | 135 | 210 | 210 | 210 | 210 | 300 | 300 | 380 | 425 | — | — |
| | 220V [A] | 25 | 30 | — | — | 135 | 135 | 210 | 210 | 210 | 210 | 300 | 300 | 380 | 425 | — | — |
| | 440V [A] | 0.6 | 0.6 | — | — | 3 | 3 | 3.5 | 3.5 | 3.5 | 3.5 | 4.1 | 4.1 | 4.1 | 5.8 | — | — |

Series-wound Electronic — Series-wound Motors
EI Starting, reverse current braking, reversing, stepping DC-5, 60 °C

Motors
Starting,
reverse
current
braking,
reversin
g,

Block

| | | | | | | | |
|--------------------|----------------------------------|---|---|---|---|---|---|
| | top opening [mm ²] | — | — | — | — | — | — |
| | bottom [mm ²] | | | | | | |
| | opening | | | | | | |
| | top opening [mm ²] | — | — | — | — | — | — |
| | bott. opening [mm ²] | | | | | | |
| | b max. [mm] | — | — | — | — | — | — |
| | s top [mm] | | | | | | |
| | s bottom [mm] | | | | | | |
| Recommended torque | [N•m] | — | — | — | — | — | — |
| Cross section per | [AWG] | — | — | — | — | — | — |
| UL/CSA top | | | | | | | |
| bottom | [AWG] | — | — | — | — | — | — |
| Recommended torque | [lb-in] | — | — | — | — | — | — |

★ Pozidriv No. 2 / Blade No. 3 screw

✱ Pozidriv No. 2 / Blade No. 4 screw


‡ Hexagonal socket screw

100-D, 100S-D

| | | | | | | | | | | | |
|----|-----|----|-----|-----|-----|----|----|----|----|-----|-----|
| 95 | 110 | 95 | 110 | 140 | 180 | 21 | 25 | 30 | 42 | 630 | 860 |
| | | | | | | | 0 | 0 | 0 | 0 | |

| | | | | | | | | | | | | |
|-------------|--------------|---|---|---|---|---|---|---|---|---|---|---|
| Coil Type : | Conventional | X | X | — | — | X | X | — | — | — | — | — |
| | Electronic | — | — | X | X | X | X | X | X | X | X | X |
| | EI | | | | | | | | | | | |

Conductor Cross Sections - Main



Contacts

Terminal type

| | | | | | | | |
|--------------------|-------------------------|-----|------|------|-------|-------|---|
| | (1) [mm] | — | — | — | — | — | — |
| | conducto ²] | — | — | — | — | — | — |
| | r [mm | | | | | | |
| | (2) ²] | | | | | | |
| | conducto | | | | | | |
| | rs | | | | | | |
| | (1) [mm] | — | — | — | — | — | — |
| | conducto ²] | — | — | — | — | — | — |
| | r [mm | | | | | | |
| | (2) ²] | | | | | | |
| | conducto | | | | | | |
| | rs | | | | | | |
| | b max. [mm | 20 | 25 | 30 | 52 | 52 | |
| |] | | | | | | |
| | c max. [mm | 10 | 12.5 | 15 | 22 | 22 | |
| |] | | | | | | |
| | s max. [mm | 5 | 5 | 6 | 2 x 8 | 2 x 8 | |
| |] | | | | | | |
| | Ø min. [mm | 6.1 | 8.3 | 10.5 | 13 | 13 | |
| |] | | | | | | |
| Recommended torque | [Nm] | 9 | 22 | 43 | 68 | 68 | |
| Cross section per | [AWG] | — | — | — | — | — | |
| UL/CSA | | | | | | | |

Short Circuit Coordination (Max. Fuse or Circuit Breaker Rating)**Per IEC 60947-4-1 (contactor and fuses only)**

| DIN Fuses - gG, gL | | 50 kA Available Fault Current | | | | | | | | | | | | |
|---------------------------|-------------|-------------------------------|---|---|----|----|-----|-----|----|----|----|----|------|------|
| Type "1" [A] (690V) | 35 35 35 50 | 5 | 5 | 8 | 12 | 12 | 160 | 160 | 16 | 25 | 25 | 25 | 250* | 250* |
| Type "2" [A] (400V) | 16 20 20 25 | 3 | 3 | 4 | 80 | 80 | 63 | 80 | 10 | 16 | 16 | 16 | 160* | 100* |
| Type "2" [A] (690V) | — — — 25 | 3 | 3 | 4 | 80 | 80 | 63 | 80 | 10 | 16 | 16 | 16 | 160* | 100* |
| BS88 Fuses | | 65 kA Available Fault Current | | | | | | | | | | | | |
| Type "1" [A] (415V) | — — — 25 | 3 | 4 | 5 | 63 | 80 | — | — | 80 | 10 | 16 | 16 | — | — |
| Type "2" [A] (415V) | — — — 20 | 2 | 3 | 5 | 63 | 80 | — | — | 80 | 10 | 12 | 16 | — | — |

Per UL 508 and CSA 22.2 No. 14**(contactor and fuses or circuit breaker only)**

| UL Class K5 and RK5 Fuses | | 5 kA Available Fault Current | | | | | | | | | | | | |
|---------------------------------------------------|-------------|--------------------------------|---|---|----|----|-----|-----|----|----|----|-----|-----|---|
| UL Listed[A] Combination (600V) | 40 40 40 35 | 4 | 7 | 9 | 11 | 12 | 125 | 125 | 15 | 20 | — | — | — | — |
| UL Class K5 and RK5 Fuses | | 10 kA Available Fault Current | | | | | | | | | | | | |
| UL Listed[A] Combination (600V) | — — — — | — | — | — | — | — | — | — | — | 25 | 30 | 300 | 300 | — |
| UL Class L Fuses | | 18 kA Available Fault Current | | | | | | | | | | | | |
| UL Listed[A] Combination (600V) | — — — — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| UL Class L Fuses | | 30 kA Available Fault Current | | | | | | | | | | | | |
| UL Listed[A] Combination (600V) | — — — — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| UL Class L Fuses | | 42 kA Available Fault Current | | | | | | | | | | | | |
| UL Listed[A] Combination (600V) | — — — — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| UL Class CC and CSA HRCI-MISC Fuses | | 100 kA Available Fault Current | | | | | | | | | | | | |
| UL verified combination to IEC 60947-4-1 "Type 2" | — — — 20§ | 2 | 3 | 4 | — | — | — | — | — | — | — | — | — | — |
| UL Class J and CSA HRCI-J Fuses | | 100 kA Available Fault Current | | | | | | | | | | | | |
| UL verified | — — — 20§ | 2 | 3 | 4 | 50 | 50 | — | — | 70 | 80 | 10 | 15 | — | — |

| | | | | | | | | | | | | | | |
|-------------------------------------------------------------------------------------|-----|--------------------------------|---------|-----|-----|-----|-----|-----|-----|-----|-----|------|------|------|
| Type "2" (415V) | [A] | 160 | 250 | 200 | 200 | 250 | 250 | 355 | 355 | 450 | 560 | * | * | |
| Per UL 508 and CSA 22.2 No. 14 (contactor and fuses or circuit breaker only) | | | | | | | | | | | | | | |
| UL Class K5 and RK5 Fuses | | 5 kA Available Fault Current | | | | | | | | | | | | |
| UL Listed | [A] | — | — | — | — | — | — | — | — | — | — | — | — | |
| Combination (600V) | | | | | | | | | | | | | | |
| UL Class K5 and RK5 Fuses | | 10 kA Available Fault Current | | | | | | | | | | | | |
| UL Listed | [A] | 225 | 250 | 350 | 450 | 225 | 250 | 350 | 450 | 500 | — | — | — | — |
| Combination (600V) | | | | | | | | | | | | | | |
| UL Class L Fuses | | 18 kA Available Fault Current | | | | | | | | | | | | |
| UL Listed | [A] | — | — | — | — | — | — | — | — | 700 | 700 | 1000 | — | — |
| Combination (600V) | | | | | | | | | | | | | | |
| UL Class L Fuses | | 30 kA Available Fault Current | | | | | | | | | | | | |
| UL Listed | [A] | — | — | — | — | — | — | — | — | — | — | — | 2000 | — |
| Combination (600V) | | | | | | | | | | | | | | |
| UL Class L Fuses | | 42 kA Available Fault Current | | | | | | | | | | | | |
| UL Listed | [A] | — | — | — | — | — | — | — | — | — | — | — | — | 2500 |
| Combination (600V) | | | | | | | | | | | | | | |
| UL Class CC and CSA HRCI-MISC Fuses | | 100 kA Available Fault Current | | | | | | | | | | | | |
| UL verified | [A] | — | — | — | — | — | — | — | — | — | — | — | — | — |
| combination to IEC 60947-4-1 "Type 2" | | | | | | | | | | | | | | |
| UL Class J and CSA HRCI-J Fuses | | 100 kA Available Fault Current | | | | | | | | | | | | |
| UL verified | [A] | 200 | 250/300 | 200 | 200 | 250 | 300 | 400 | 400 | 500 | 600 | * | * | |
| combination to IEC 60947-4-1 "Type 2" | | | | | | | | | | | | | | |
| UL Inverse-Time Circuit Breaker | | 5 kA Available Fault Current | | | | | | | | | | | | |
| UL Listed | [A] | — | — | — | — | — | — | — | — | — | — | — | — | |
| Combination (480V) | | | | | | | | | | | | | | |
| UL Listed | [A] | — | — | — | — | — | — | — | — | — | — | — | — | |
| Combination (600V) | | | | | | | | | | | | | | |
| UL Inverse-Time Circuit Breaker | | 10 kA Available Fault Current | | | | | | | | | | | | |
| UL Listed | [A] | 125 | 150 | 200 | 250 | 125 | 150 | 200 | 250 | 300 | — | — | — | — |
| Combination (600V) | | | | | | | | | | | | | | |
| UL Inverse-Time Circuit Breaker | | 18 kA Available Fault Current | | | | | | | | | | | | |
| UL Listed | [A] | — | — | — | — | — | — | — | — | 350 | 400 | 500 | — | — |
| Combination (600V) | | | | | | | | | | | | | | |
| UL Inverse-Time Circuit Breaker | | 30 kA Available Fault Current | | | | | | | | | | | | |
| UL Listed | [A] | — | — | — | — | — | — | — | — | — | — | — | 1200 | — |
| Combination (600V) | | | | | | | | | | | | | | |
| UL Inverse-Time Circuit Breaker | | 42 kA Available Fault Current | | | | | | | | | | | | |
| UL Listed | [A] | — | — | — | — | — | — | — | — | — | — | — | — | 1200 |
| Combination (600V) | | | | | | | | | | | | | | |

* To be determined.

Auxiliary Contacts and Auxiliary Contact Blocks

100-K

100-C, 100S-C



100-D, 100S-D

| | | Internal | Front-mounted | Internal | Front-mounted | Front-mounted (Bifurcated) | Side-mounted | Side-mounted Conventional | Bifurcated | Electronically compatible | |
|------------------------------------------------------------------------|----------|----------|---------------|----------|---------------|----------------------------|--------------|---------------------------|------------|---------------------------|--|
| Switching of AC Loads | | | | | | | | | | | |
| AC-12 I_{th} at 40 °C | [A 10] | 10 | 20 | 10 | 10 | 10 | 10 | 16 | 10 | 0.1 | |
| at 60 °C | [A 6] | 6 | 20 | 6 | 6 | 6 | 6 | 12 | 6 | at 250V | |
| AC-15 at rated voltage of | | | | | | | | | | | |
| 24V | [A 6] | 3 | 10 | 6 | 3 | 3 | 6 | 5.5 | 3 | (1...100 mA) | |
| 42/48V | [A 6] | 3 | 10 | 6 | 3 | 3 | 6 | 5.5 | 3 | at | |
| 120V | [A 6] | 3 | 10 | 6 | 3 | 3 | 6 | 5.5 | 3 | 3...125V | |
| 230V | [A 3] | 2 | 10 | 5.5 | 3 | 3 | 5.5 | 5.5 | 3 | | |
| 240V | [A 3] | 2 | 10 | 5 | 3 | 3 | 5 | 5 | 3 | | |
| 400V | [A 1.8] | 1.2 | 6 | 3 | 2 | 2 | 3 | 3 | 2 | | |
| 415V | [A 1.8] | 1.2 | 6 | 3 | 2 | 2 | 3 | 2.5 | 2 | | |
| 500V | [A 1.4] | 1.0 | 2.5 | 1.6 | 1.2 | 1.2 | 1.6 | 1.6 | 1.2 | | |
| 690V | [A 1.0] | 0.6 | 1 | 1 | 0.7 | 0.7 | 1 | 1 | 0.7 | | |
| Switching of DC Loads | | | | | | | | | | | |
| DC-12 $L/R < 1$ ms resistive loads at | | | | | | | | | | | |
| 24V DC | [A 6] | — | 12 | 12 | 6 | 6 | 6 | 16 | 16 | — | |
| 48V DC | [A 4] | — | 9 | 9 | 3.2 | 3.2 | 3.2 | 9 | 9 | — | |
| 110V DC | [A 0.6] | — | 3.5 | 3.5 | 0.45 | 0.45 | 0.45 | 3.5 | 3.5 | — | |
| 220V DC | [A 0.2] | — | 0.55 | 0.55 | 0.18 | 0.18 | 0.18 | 0.55 | 0.55 | — | |
| 440V DC | [A 0.08] | — | 0.2 | 0.2 | 0.1 | 0.1 | 0.1 | 0.2 | 0.2 | — | |
| DC-14 $L/R < 15$ ms inductive loads with economy resistor in series at | | | | | | | | | | | |
| 24V DC | [A 4] | — | 9 | 9 | 2 | 2 | 2 | 9 | 9 | — | |
| 48V DC | [A 2.5] | — | 5 | 5 | 1.6 | 1.6 | 1.6 | 5 | 5 | — | |
| 110V DC | [A 0.4] | — | 2 | 2 | 0.3 | 0.3 | 0.3 | 2 | 2 | — | |

| | | | | | | | | | |
|-----------------------------------|--------------|------|------|------|------|------|------|------|--------------|
| DC] | 220V [A 0.12 | — | 0.4 | 0.4 | 0.12 | 0.12 | 0.4 | 0.4 | — |
| DC] | 440V [A 0.05 | — | 0.16 | 0.16 | 0.05 | 0.05 | 0.16 | 0.1 | — |
| DC] | | | | | | | | | |
| DC-13 switching electromagnets at | 24V [A 2.8 | 2.3 | 5 | 5 | 2.5 | 5 | 5 | 5 | (1...100 mA) |
| DC] | 48V [A 1.2 | 1 | 3 | 3 | 1.5 | 3 | 2 | 2 | at 3...125V |
| DC] | 110V [A 0.55 | 0.55 | 1.2 | 1.2 | 0.6 | 1.2 | 0.7 | 0.7 | |
| DC] | 220V [A 0.27 | 0.27 | 0.6 | 0.6 | 0.3 | 0.6 | 0.25 | 0.25 | |
| DC] | 440V [A 0.15 | 0.15 | 0.3 | 0.15 | 0.15 | 0.15 | 0.12 | 0.12 | |
| DC] | | | | | | | | | |

Fuse gG

Short-circuit protection with no welding of contacts per IEC 60947-5-1

| | | | | | | | | | |
|-----------------------------------------------------------------------------------------|----|----------|-----------------------------------------|-----------------------------------------|-----------------------------------------|-----------------------------------------|-----------------------------------------|----------------------------------------------------|-----------------------------------------|
|  [A 10 | 10 | 20 | 10 | 10 | 10 | 10 | 16 | 16 | — |
|  [A 10 | 10 | 20 | 10 | 10 | 10 | 10 | 16 | 16 | — |
| Protective Separation per IEC 60947-1, Annex N | — | — | between load and auxiliary circuit 320V | between load and auxiliary circuit 440V | between load and auxiliary circuit 440V | between load and auxiliary circuit 440V | between load and auxiliary circuit 440V | between load and auxiliary circuit 440V | between load and auxiliary circuit 440V |
| Min. switching capacity according to IEC 60947-5-4 | — | 15V/2 mA | 17V/10 mA | 17V/5 mA | 8V/5 mA | 17V/10 mA | 17V/10 mA | 5V/2 mA (1 Mio. ops.) | 3V/1 mA |
| Failure rate | — | — | — | — | — | — | — | <10-8 (less than 1 failure to 100 Mio. operations) | — |

Load Carrying Capacity per UL/CSA

| | | | | | | | | |
|--------------------|-------------------|----------|---------|-------|----|----|----------------|------------------------------------------|
| Rated voltage | AC [V max. 600 | max. 600 | | | | | max. 600 | max. 250 |
| Continuous rating | 40 °C [A 10 | | 10 | 10 | 10 | 10 | 10 | General purpose Heavy pilot duty (A 600) |
| Switching capacity | AC [A A 600 B 600 | A 600 | | | | | | |
| Rated voltage | DC [V max. 600 | max. 600 | | | | | max. 600 | max. 250 |
| Switching | DC [A Q 600 | P 600 | P 300/Q | Q 600 | | | Standard pilot | Standard pilot |

capacity

600

duty duty
(P 600) (Q 600)

General


| | | | |
|-------------------------------------------------------------|-----------------------------------------------------------------|---------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------|
| | 100-K 05...12 | 100-C, 100S-C 09...85 | 100-D, 100S-D 95...420 |
| Rated Isolation Voltage U_i | | | |
| IEC [V] | 690 | 690 | 1000 |
| UL, CSA [V] | 600 | 600 | 600 |
| Rated Impulse Voltage Withstand | [kV]6 | 8 | 12 |
| U_{imp} | | | |
| Rated Voltage U_e | | | |
| AC 50/60 Hz [V] | 230, 240, 400, 415, 500, 690 | 115, 230, 400, 500, 690 | 230, 240, 400, 415, 500, 690, 1000 |
| DC [V] | 24, 48, 110, 220, 440 | 24, 48, 110, 220, 440 | 24, 48, 110, 220, 440 |
| Insulation Class of the Coil | Class F per IEC 60085 Class 105 insulation system per UL 508 | Class F per IEC 60085 | Class B per VDE 0660, Table 22 |
| Rated coil frequency | AC 50/60 Hz, DC | AC 50/60 Hz, DC | AC 50 Hz, 50/60 Hz, DC |
| Ambient Temperature | | | |
| Storage [°C] | -55...+80 | -55...+80 | -40...+80 |
| Operation at rated voltage at 70 °C [°C] | -25...+60 | -25...+60 | -25...+60 |
| Climatic Withstand | 15% current reduction against 60°C values | | |
| Max. Altitude of Installation Site | IEC 60068-2 [m] 2000 NN, per IEC 60947-4 | IEC 60068-2 2000 NN, per IEC 60947-4 | IEC 60068-2 2000 NN, per IEC 60947-4 |
| Protection Class | IP2X | IP2X | IP00 IEC 60529 / DIN 40 050 IP10 IEC 60529 / DIN 40 050 IP20 IEC 60529 / DIN 40 050 IP20 IEC 60529 / DIN 40 050 |
| Single contactor cover | — | | |
| Contactors with frame terminal block | — | | |
| Auxiliary contact | IP2X | | |
| Protection against Accidental Contact | — | Finger and back-of-hand proof per VDE 0106, part 100 | Finger and back-of-hand proof per VDE 0106, part 100 |
| Resistance to Shock | IEC 60068-2 | IEC 60068-2-27 | IEC 60068-2-27 |
| Resistance to Vibration Mechanically Linked Contacts | IEC 60068-2 | IEC 60068-2-6 | IEC 60068-2-6 |
| IEC 60947-5-1, Annex L | 100-K... (on main device) | 100-C09...C23, 100S-C09...C85, 100-C + 100-FA/FB/FC (except L11, L22), 100-C09...C43 + 100- | — |

| | | | |
|------------------------------------------------------|-----------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------|
| Mirror Contacts IEC 60947-4 Annex F | 100-K... + 100-KF... | FAB/FBB/FCB 100-C09...C23, 100S- C09...C85, 100-C + 100-FA/FB/FC + 100-SA/SB, 100-C60...C85 + 100- FAB/FBB/FCB, 100S-C + 100-SA/SB | 100-D... + 2 x 100-DS1-11 100S-D... + 2 x 100S-DS1-11 |
| Standards Compliance | IEC/EN 60947-1/-4- 1/-5-1; UL 508; CSA 22.2. No. 14 | IEC/EN 60947-1/-4-1/-5- 1; UL 508; CSA 22.2. No. 14 | IEC/EN 60947-1/- 4-1/-5-1; UL 508; CSA 22.2. No. 14 |
| Certifications | CE, cULus CCC in prep. | CE, cULus, CCC | CE, cULus, CCC |


Bulletin 100S-C/104S-C Approximate Dimensions

Bulletin 100S-C/104S-C Contactors and Accessories


Approximate dimensions are shown in millimeters (inches) and not intended for manufacturing purposes.

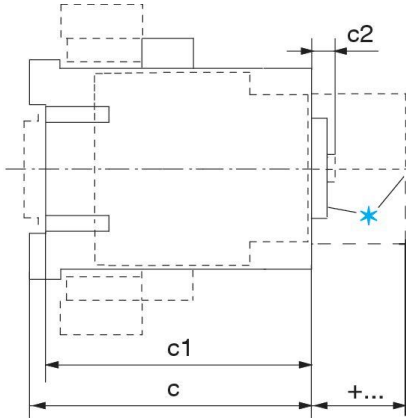

Mounting Position

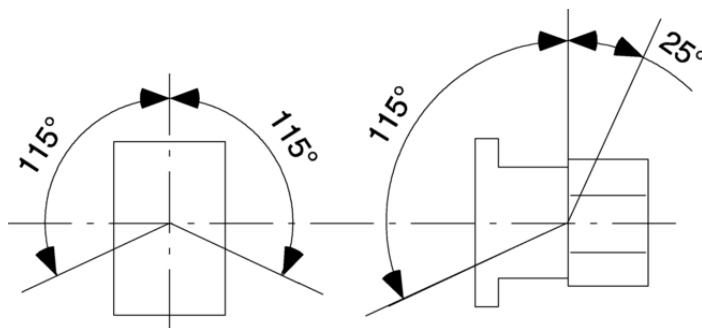

AC contactors and DC contactors with electronic coils

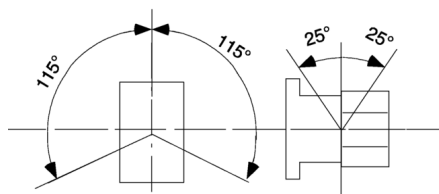

DC contactors

AC Contactors and DC Contactors with Electronic Coils

| Cat. No. | a | b | c | c1 | c2 | Ød | d1 | d2 |
|-----------------------|----|-------------------|---------|------------------|----------|-----------|---------|----|
| 100S-C09...100S-C2345 | | 81 | 119.5 | 114.5 | 6 | 2-4.5 | 60 | 35 |
| | | (1-25/32)(3-3/16) | (4-3/4) | (4-43/64)(15/64) | (2-3/16) | (2-23/64) | (1-3/8) | |
| 100S-C30, 100S-C37 | 45 | 81 | 136.5 | 131.6 | 6.5 | 2-4.5 | 60 | 35 |

| | | | | | | | | |
|-----------------------|-----------|-----------|-----------|-----------|---------|----------|-----------|-----------|
| 100S-C43 | (1-25/32) | (3-3/16) | (5-37/64) | (5-11/32) | (1/4) | (2-3/16) | (2-23/64) | (1-3/8) |
| | 54 | 81 | 139.5 | 134.6 | 6.5 | 2-4.5 | 60 | 45 |
| 100S-C60...100S-C8572 | (2-1/8) | (3-3/16) | (5-11/16) | (5-29/64) | (1/4) | (2-3/16) | (2-23/64) | (1-25/32) |
| | 122 | 156 | 150.5 | 8.5 | 4-5.4 | 100 | 55 | |
| | (2-53/64) | (4-51/64) | (6-11/32) | (6-1/8) | (21/64) | (4-7/32) | (3-15/16) | (2-11/64) |

DC Contactors

| Cat. No. | a | b | c | c1 | c2 | Ød | d1 | d2 |
|-------------------------|-----------|-----------|-----------|-----------|---------|----------|-----------|-----------|
| 100S-C09Z...100S-C16Z | 45 | 81 | 145.5 | 140.5 | 6 | 2-4.5 | 60 | 35 |
| | (1-25/32) | (3-3/16) | (5-49/64) | (5-37/64) | (15/64) | (2-3/16) | (2-23/64) | (1-3/8) |
| 100S-C23Z | 45 | 81 | 162.5 | 158 | 6 | 2-4.5 | 60 | 35 |
| | (1-25/32) | (3-3/16) | (6-7/16) | (6-1/4) | (15/64) | (2-3/16) | (2-23/64) | (1-3/8) |
| 100S-C30Z...100S-C37Z | 45 | 81 | 180.5 | 175.5 | 6.5 | 2-4.5 | 60 | 35 |
| | (1-25/32) | (3-3/16) | (7-5/32) | (6-61/64) | (1/4) | (2-3/16) | (2-23/64) | (1-3/8) |
| 100S-C43Z | 54 | 81 | 183.5 | 179 | 6.5 | 2-4.5 | 60 | 45 |
| | (2-1/8) | (3-3/16) | (7-17/64) | (7-3/32) | (1/4) | (2-3/16) | (2-23/64) | (1-25/32) |
| 100S-C60D...100S-C85D72 | 72 | 122 | 156 | 150.5 | 8.5 | 4-5.4 | 100 | 55 |
| | (2-53/64) | (4-51/64) | (6-11/32) | (6-1/8) | (21/64) | (4-7/32) | (3-15/16) | (2-11/64) |

Accessories

| | | |
|-------------------------------------------|-------------------------------------------|--------------------|
| Contactors with | | mm (inches) |
| Auxiliary contact block for side mounting | 1- or 2-pole | a + 9 (a + 23/64) |
| Electronic Timing Module | on coil terminal side | b + 24 (b + 15/16) |
| Mechanical Interlock | on side of contactor | a + 9 (a + 23/64) |
| Interface Module | on coil terminal side | b + 9 (b + 23/64) |
| Surge Suppressor | on coil terminal side | b + 3 (b + 1/8) |
| Labeling with ★ | label sheet | + 0 (+ 0) |
| | marking tag sheet with clear cover | + 0 (+ 0) |
| | marking tag adapter for System V4 / V5 | + 5.5 (+ 7/32) |
| | marking tag adapter for System Bul. 1492W | + 5.5 (+ 7/32) |