

Flow Control Valve

Series SRCB..



- plug-in solenoid for easy coil change
- flow rates are unaffected by temperature change or when the higher load pressure alternates between the outlet ports
- energy - optimised in open center
- robust, durable and reliable

1 Descriptions

1.1 Generals

Flow control valves SRCB are used to set the working speed of hydraulic actuators, the setting is load independent and pressure compensated. The flow rate is set by an adjustable slit-type orifice. When used as a 3-way valve, the higher pressure can be either at the A or B port. For a 2-way

flow control function please ask Bucher Hydraulics. The special orifice design ensures that the flow setting is largely independent of the viscosity of the fluid. The valve's cartridge construction allows to design a hydraulic system that meets the client's precise requirements.

1.2 Application examples


- Harvesters
- Sweepers
- Refuse collection vehicles
- Fertiliser spreaders
- Snow and ice clearing equipment
- Mowers
- Road rollers
- Municipal vehicles
- Forestry machines
- Wood chippers

2 Symbols

2.1 2-way flow control



2.2 3-way flow control

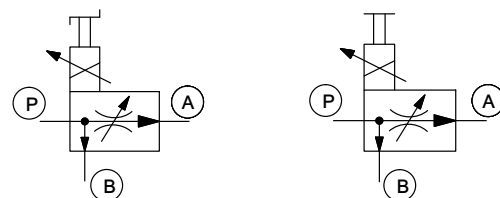

For 2-way flow control functions please contact Bucher Hydraulics.

3 Technical data

General characteristics	Description, value, unit
Design	screw-in cartridge
Flow direction	P → A controlled P → B surplus flow discharge (can be pressurised)
Seals	Viton (FPM)
De-energised position	normally closed
Mounting attitude	unrestricted; preferably with coil at bottom end (automatic air bleed)
Commissioning	bleed all air from the system (if possible, operate valve several times without load)

Electrical characteristics	Description, value, unit
Design	high pressure; wet armature
Supply voltage	12 or 24 Volt DC from an electronic controller
Power consumption	27.6 Watt with 12 V coil and $I_{max.} = 2,3 \text{ A}$ 27,6 Watt with 24 V coil and $I_{max.} = 1,15 \text{ A}$
Dither frequency required	50 - 150 Hz (observe $I_{max.}$)
Relative duty cycle	100 % at $I_{max.}$
Protection class (with a properly-fitted plug)	DIN plug - IP54 AMP Junior Timer - IP65 Deutsch plug - IP67
Electrical connection	plug-base with pins to DIN 43650 AMP Junior Timer plug connector (2-pole) Deutsch plug DT04-2P-EP04

Hydraulic characteristics	Description, value, unit
Constant flow range	10, 16, 25, 32, 40, 50, 63, 80 ¹⁾
Inlet flow	max. 100 l/min ¹⁾
Operating pressure	max. 315 bar ²⁾
Leakage	max. 100 cm ³ /min at 100 bar ¹⁾
Min. pressure difference (pressure compensator)	7 bar
Control accuracy (as a % of the nominal flow): Load-dependency when under pressure Hysteresis when operated	max ± 2,5 % ³⁾ max ± 3,5 % ³⁾
Fluids	mineral oil to DIN 51524 and DIN 51525 ⁴⁾
Fluid temperature range	-20 °C ... +80 °C
Viscosity range	10 mm ² /s ... 300 mm ² /s
Filtration	NAS 1638 class 9, ISO 4406 class 21/18/14; achievable with a filter rating of $\beta_{10} \geq 75$

1) Values refer to an oil viscosity of 35 mm²/s (cSt).


2) For higher pressures, consult Bucher Hydraulics

3) Values refer to the selected flow range.

4) for other fluids, consult Bucher Hydraulics.


4 Performance graphs

4.1 Q / I characteristics

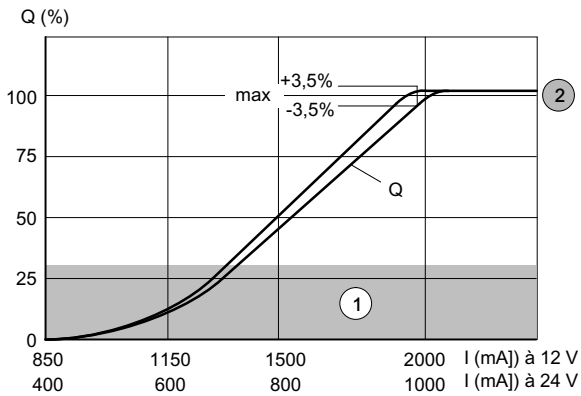


1	Fine control range
2	100% = 2000 ± 200 mA at 12 V = 1000 ± 100 mA at 24 V (100%- values vary with nominal flow rate)

4.2 Variation in flow

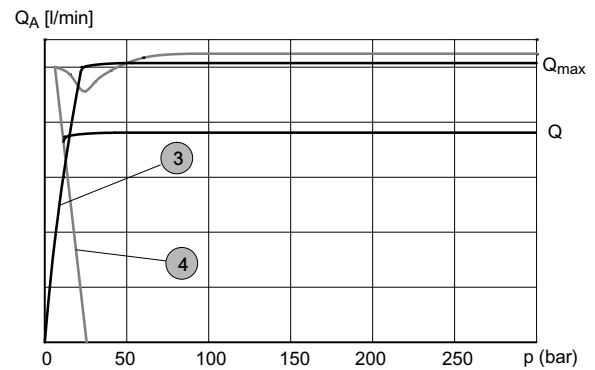

3	Q _A - constant flow pressurised
4	Q _A - surplus flow pressurised


4.3 Pressure drop during vented bypass P → B

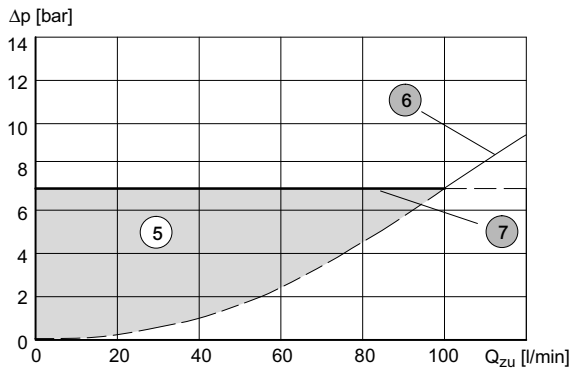


5	Pressure loss area (The actual pressure-loss characteristic is dependent on the tank pressure at port B)
6	Control valve throttling curve (Dependent on applied body)
7	Control - Δp - characteristic 7 bar

5 Dimensions

5.1 Revision status 0

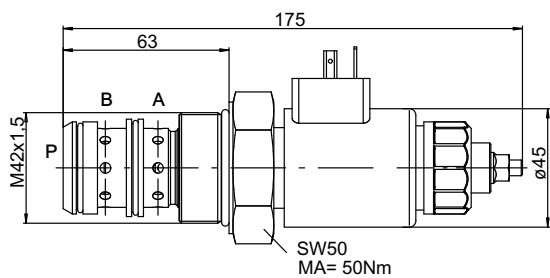


5.2 Revision status 01

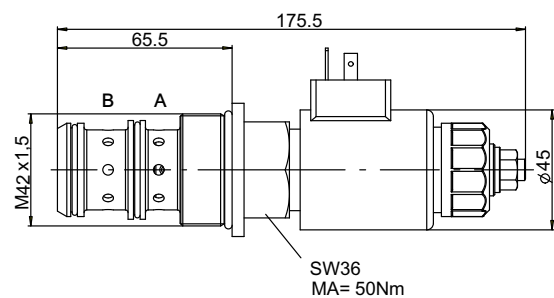

6 Models

6.1 Manual override


Emergency pin, SRC....S..

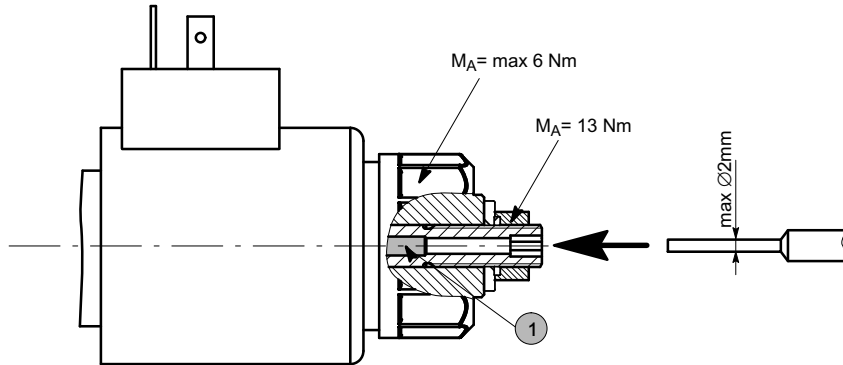

IMPORTANT : By pressing the solenoid pin (1),
you operate the valve ON/OFF


Basic manual override, SRC....N..

Q_0 to $Q_{max.}$ = of approx. 3,5 turns at the handle

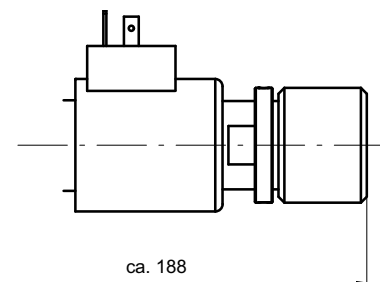

Basic manual override, SRC....T..

Q_0 to $Q_{max.}$ = of about one turn at the handle

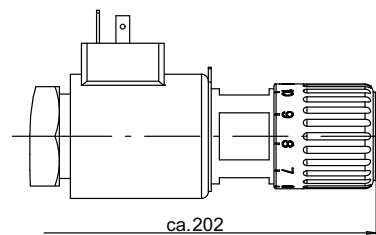

6.2 Sockets

GDM plug to DIN 43650 -G..-	AMP Junior Timer -J..-	Deutsch plug DT04-2P-EP04 -T..-

8.3 Ordering code

S R C B V M 2 - 2 * * 2 - 0 M 2 2 * * * /

Mounting body for SRCBV cartridge valve

Type	Separate unit	single = M1, double = M2
	Motor mtg. (RS29)	single = R1, double = R2
	Inlet section	= E*
	Intermediate section	= Z*
	End section	= A*
	Bolt-on section	= AP

Service line relief for 1st controller		in P	in A
None		= *	= *
Pressure range	3 - 30 bar ¹⁾	= 0	= 4
Pressure range	30 - 70 bar ²⁾	= 1	= 5
Pressure range	70 - 200 bar	= 2	= 6
Pressure range	200 - 300 bar	= 3	= 7

Service line relief for 2nd controller		in P	in A
None		= *	= *
Pressure range	3 - 30 bar ¹⁾	= 0	= 4
Pressure range	30 - 70 bar ²⁾	= 1	= 5
Pressure range	70 - 200 bar	= 2	= 6
Pressure range	200 - 300 bar	= 3	= 7

Service line relief for 3rd controller		in P	in A
None		= *	= *
Pressure range	3 - 30 bar ¹⁾	= 0	= 4
Pressure range	30 - 70 bar ²⁾	= 1	= 5
Pressure range	70 - 200 bar	= 2	= 6
Pressure range	200 - 300 bar	= 3	= 7

Additional functions		
None		= *
For use with LS pump		= L
With bypass check valve		= R
With anti-cavitation for	1st controller = 1	
	2nd controller = 2	
	3rd controller = 3	
	1st and 2nd controller = 4	
	1st and 3rd controller = 5	
	2nd and 3rd controller = 6	
	1st, 2nd and 3rd controller = 7	

Design no. (to be insert by the factory)

Port threads DIN 3852 - M22 x 1,5 = M22
(other threads - contact Bucher Hydraulics)

Nominal voltage of proportional solenoid (for bodies with solenoid operated valves)
DC 12 Volt = G12
DC 24 Volt = G24
None = ***

Variants / special features (to be insert by the factory)

1) only up to $Q_{max} = 25$ l/min

2) only up to $Q_{max} = 40$ l/min







IMPORTANT : The flow control valves must be ordered separately as detailed in section 6.
Existing mounting body SR3CVM could also be used.

9 Electronics

For controlling SR... flow control valves, we recommend the ELSK 106 series of control units and plug-in cards. These are used to control 1 or 2 proportional solenoids and can also operate on/off solenoids and other auxiliary functions.

Plug-in cards are available, and control units can be supplied. The following table contains a small selection of the extensive range of accessories and electronics from Bucher Hydraulics.

Picture	Type	Description	Order-No.
	ELSK106-01***/11 Data sheet: 100-P-700008	Makrolon® housing with magnetic clamp, rotary potentiometer, indicator knob; LED	100026578
	ELSK106-02***/11 Data sheet: 100-P-700008	Makrolon® housing with magnetic clamp, rotary potentiometer, indicator knob, ON/OFF switch, LED	100026579
	ELSK106-09*** Data sheet: 100-P-700008	Robust aluminium housing with 2 set-point potentiometer, 3 toggle switches, a LED and socket insert STAF 14	100032782
	ELSK106-10*** Data sheet: 100-P-700008	Robust aluminium housing with 2 set-point potentiometer, 3 toggle switches, a LED and socket insert STAF 14	100032531
	ELSK106-14*** Data sheet: 100-P-700008	Robust aluminium housing with 2 set-point potentiometer, 3 toggle switches, a LED, a key switch (starter) and socket insert STAF 14	100032159

10 Installation information



IMPORTANT!

When mounting the valve, ensure that the body is not subjected to any distorting forces. If necessary use shims to equalise the level of the mounting points. Do not use any pipe fittings with tapered-threads!

11 Specification sheet flow control valve, series SRCB

Order Enquiry

Company: Customer No.
 Address: Phone number:
 Code/Location: Fax number:
 Country: E-mail address

Ordering code (see Sect. 6)

	Quantity
SRCB <input type="text"/> <input type="text"/> <input type="text"/> - 0 <input type="text"/> <input type="text"/>	<input type="text"/>
SRCB <input type="text"/> <input type="text"/> <input type="text"/> - 0 <input type="text"/> <input type="text"/>	<input type="text"/>
SRCB <input type="text"/> <input type="text"/> <input type="text"/> - 0 <input type="text"/> <input type="text"/>	<input type="text"/>
SRCB <input type="text"/> <input type="text"/> <input type="text"/> - 0 <input type="text"/> <input type="text"/>	<input type="text"/>

11.1 Details of the application

Operating pressure (bar): Max. intermittent pressure (bar):
 Inlet flow (l/min): Controlled flow rate (l/min):

Fluids: Mineral oil Biodegradable oil Other
 HFA HFC HFD

Fluid temperature range (5°): Viscosity range (mm²/s) (cSt):

Supply system: Fixed-disp. pump Constant-pressure pump
 Var.-disp. pump, LS Variable-displacement pump, power-limited

Name

Date

Signature

info.kl@bucherhydraulics.com

www.bucherhydraulics.com

© 2012 by Bucher Hydraulics GmbH, D-79771 Klettgau

All rights reserved.

Data is provided for the purpose of product description only, and must not be construed as warranted characteristics in the legal sense. The information does not relieve users from the duty of conducting their own evaluations and tests. Because the products are subject to continual improvement, we reserve the right to amend the product specifications contained in this catalogue.

Classification: 430.310.310.330.305