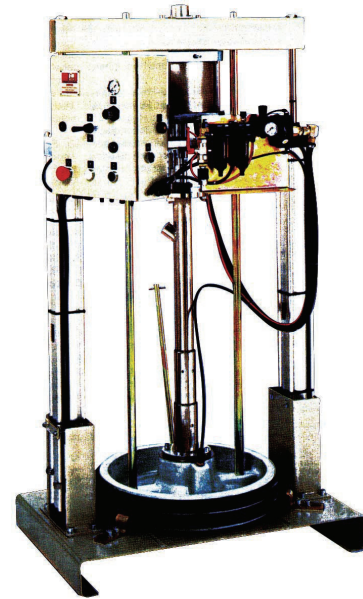


- **Pneumatically driven container pump with two-pillar pump lifter for the direct delivery of high viscosity media from 200 l containers**
- **Delivery of substances to manual guns, discharge or metering valves**
- **Version with integrated safety fittings for level control; pump turns off when minimum level is reached**

**Technical data:**


| | |
|-----------------------|---------------------------------------|
| Viscosity range | to 5 million mPas |
| Delivery rate | 216 cm ³ per double stroke |
| Capacity | max. 20 double strokes/min. |
| Air pressure | 4 - 6 bar supply pressure |
| Air consumption | 1800 l - 2500 l/min |
| Intensification ratio | 38 : 1 |
| Pressure of medium | 200 bar |

Connections:

| | |
|----------------|----------|
| Compressed air | R 1/2" i |
| Material | R 1" i |

Dimensions:

| | |
|-------------------------------------|--------------|
| Base | 900 x 600 mm |
| Height when pump is extended | 2,600 mm |
| Diameter of scraper ring | 580 mm |
| Diameter of container | DN 560 mm |
| Diameter of material pressure plate | DN 540 mm |
| Weight | 230 kg |

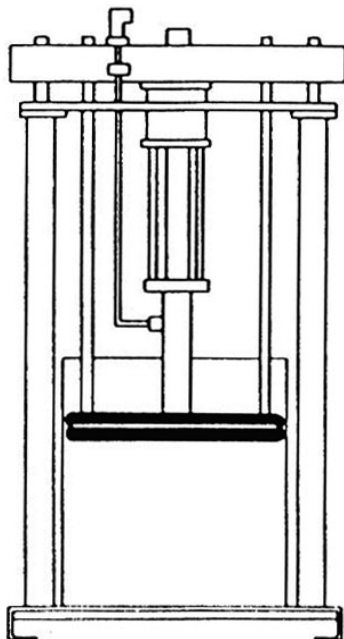




Structure:**Ordering data:****Article/Nomenclature**

Container pump 200 l
complete with pneumatic pump lifter and
maintenance unit

Material no.

J20-03

Accessories:

| | Article/Nomenclature | Material no. |
|---|---|--------------|
|  | High pressure hose DN 10 for lipids, union nut R 3/8" on both ends, 350 bar | J22-03 |
| | High pressure hose DN 10 encased in PTFE-VA, union nut R 3/8" on both ends, 175 bar | J22-04 |
| | High pressure hose DN 12 for lipids, union nut R 1/2" on both ends, 300 bar | J22-05 |
| | High pressure hose DN 12 encased in PTFE-VA, union nut R 1/2" on both ends, 150 bar | J22-06 |
|  | Material pressure controller I 16 Product connection R 3/8", 0 - 50 bar | 415705012 |
| | Product connection R 3/8", 3 - 150 bar | J21-02 |
|  | Pressure gauge 0 - 60 bar | 415705013 |
| | Pressure gauge 0 - 400 bar | J21-12 |
|  | Reduced double nipple with conical seal R 1" - R 3/8", material: V2A | |
|  | Reducer piece R 1"a - R 3/8"i material: V2A | |
| | Reducer piece R 1"a - R 1/2"i material: V2A | 415202822 |
| | Reducer piece R 3/8"a – R 1/2"i material: V2A | 415202824 |