

Optoelectronic safety systems for the protection of man and machine

Product information | Version 06



You will also find detailed information regarding our product variety on our website:

www.schmersal.net



Online documentation in 13 languages

The online catalogue for our customers is permanently updated. The Main catalogue can be consulted on the Internet in as much as 13 languages.

The technical data of our entire product range are available 24/7, always upto-date. The declarations of conformity, the test certificates and the mounting instructions can be consulted or even downloaded as well.

Service for designers

The online catalogue also includes the technical drawings of our products – a special service to designers. In this way, they can be downloaded and directly fed in CAD-systems.

The Schmersal homepage furthermore contains up-to-date information on general subjects, technical articles on machine safety as well as news regarding events and trainings. To be bookmarked!

The direct way

If you need further information or you want personal advice, you can call us as well:
Tel. +49-(0) 2 02-64 74-0.

The addresses of our representations in Germany and abroad can be found on the front pages of this catalogue.

We are at your disposal –
anyplace, anywhere, anytime!



Warning!

The Schmersal programme is not intended for private consumers, i.e. that they are not consumer products within the meaning of the European Directives (in Germany within the meaning of § 5 GPSG) or other national laws.

Subject to technical modifications and errors.

The data specified in this catalogue are carefully checked typical standard values.

Descriptions of technical correlations, details on external control units, installation and operating instructions or similar have been provided to the best of our knowledge. This however does not mean that any warranted characteristics or other

properties under liability law may be assumed, which extend beyond the "General Terms and Conditions of Delivery of Products and Services of the Electrical Industry".

We trust you will understand that the user must check our information and recommendations before using our equipment.

Content

Introduction

Optical safety sensors	Page 4
Design and operating principle	Page 6
Application EN ISO 13855	Page 8
Modes of operation and functions	Page 10
Services	Page 11

Products

Safety light barriers	Page 13
Safety light curtains and light grids	Page 21
Safety monitoring modules	Page 39

Appendix

Glossary	Page 44
----------------	---------

Schmersal offers its customers a comprehensive range of products for optoelectronic safeguarding of hazardous areas, ranging from light barriers, light grids and light curtains with different functions (e.g. blanking, muting, cascading) up to laser scanners. A large range of accessories, e.g. deflecting mirrors, mounting brackets etc. helps the user fitting and using those active optoelectronic protective devices (AOPD) in his specific application.

This brochure contains a brief introduction of the individual optoelectronic product families as well as the main accessories for the AOPD systems of the Schmersal Group.

The technical data of the individual devices are completed with wiring examples, e.g. in combination with Safety monitoring modules or for integration in the AS-i Safety at Work System. Appropriate components can be wired into a complete safety system.




The field of automation is subject to a permanent and innovative change of products and applications. The focus is on increasing the productivity and realising a smooth-running production process with a minimum of human interventions on machinery and systems. The ideal, a fully automated and totally safe machine however will always remain a dream, though the robots used in production plants already are a big step towards this goal. Human intervention and knowledge will always be required for the commissioning, monitoring and maintenance of modern industrial systems. Man however is not infallible and ignorance or lack of information, thoughtlessness or negligence often leads to damages.

For these reasons European directives such as the Machinery Directive 2006/42/EG and their corresponding standards were implemented at European level. These standards aim at detecting and constructively avoiding all possible risks and hazards during the planning and project phase of machines and systems. Safety components must be used to minimise or eliminate the residual risks. In this way, manufacturers and users are making equivalent efforts to set up an optimal process flow, which offers the highest possible protection to the operating staff. The challenge for all manufacturers of safety components is to design efficient and safe product solutions for mechanical engineers. Flaps and doors are the simplest means of access to the machine. These separating hardguarding safety solutions offer an efficient and effective protection against hazardous movements and products being ejected from the machine. When these safety guards are opened, the machine is brought to standstill (through the corresponding safety sensor transmitting the “stop” signal to the control), which interrupts and therefore slows down the production. In case


of continuous processes, which must not be interrupted, solenoid interlocks protect man and the work piece against damages. Safety fences are not suitable for production processes requiring the material to be transported into the working area by means of conveyor belts, as they do not allow for an ergonomic and optimal work sequence.

These separating hardguarding safety solutions offer an efficient and effective protection against hazardous movements and products being ejected from the machine.

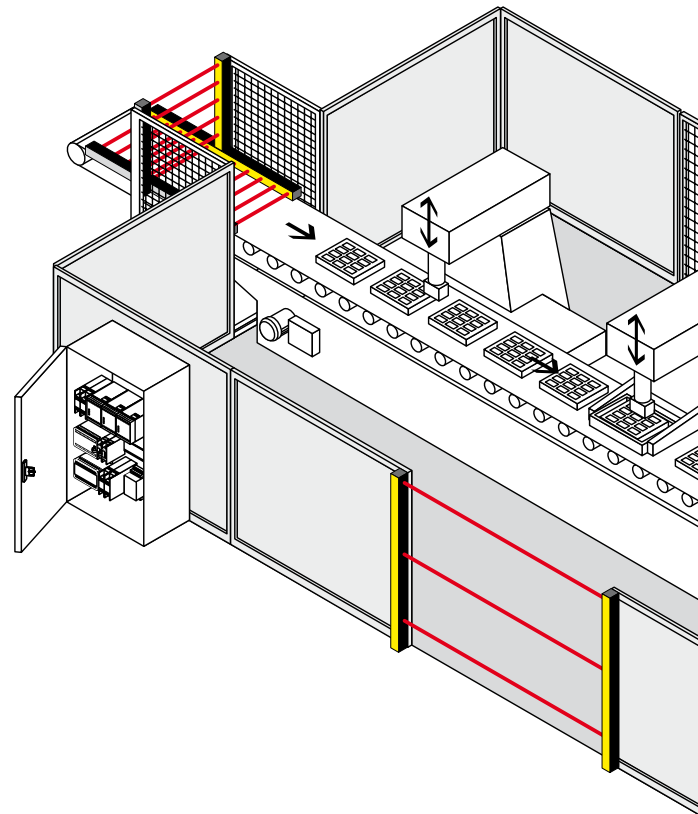

Typical applications:

- Power-driven machines
- Power-driven presses in metalworking, plastics, leather, stone working and rubber processing industry
- Folding presses and cutters
- Power-driven machines
- Power-driven presses in metalworking, plastics, leather, stone working and rubber processing industry
- Folding presses and cutters
- Filter presses
- Punching machines in leather, textile and plastics processing
- Robots stations and welding booths
- Materials handling and storage technology
- und vieles mehr

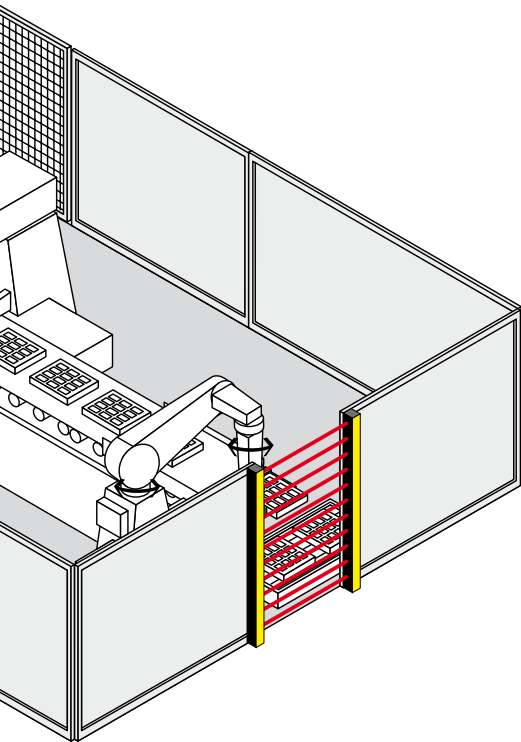

Depending on the application, the AOPD's are used for point of operation, danger zone and perimeter guarding. The user can choose from a large range of different optoelectronic safety solutions e.g. light barriers, light grids, light curtains and laser scanners.

Optoelectronic

Safety light barriers

The safety light barrier systems of the SLB range are active optoelectronic protective devices (AOPD) fulfilling the Control Category 2 or 4 in accordance with EN 954-1 or EN 61496. These systems are used as entry guards on hazardous zones, points of operation and entrances. They protect human life without restricting the production flow.

Typical applications for safety light barriers are on robots, automatic-processing plants, transfer lines, rack storages and pallet loaders.

The entire safety light barrier system includes a light emitter, a light receiver and a safety monitoring module.

This module monitors the signals of the emitter.

If the light beam is interrupted, a signal is emitted to bring the dangerous movement of the machine to standstill.

The safety monitoring module integrates functions such as start and restart inhibit as well as a contactor monitoring.

The maintenance-free safety sensors of the system with protection class IP 67 offer an integrated soiling check.

Because of their small size, safety light barriers can be fitted almost everywhere.

Safety light grids / light curtains

The safety light curtains and safety light grids of the SLC and SLG meet the requirements of Control Category 2 or 4 to EN 954-1 and Type 2 or Type 4 to EN 61496.

They safeguard points of operation and hazardous areas on different applications, e.g. presses, robot stations, injection moulding machines, pallet machines, etc.

In these active optoelectronic protective devices (AOPD), the emitter and receiver are fitted in two separate enclosures. An invisible infrared signal is sent from the emitter and monitored by the receiver. If the light beam is interrupted by an object or a person, a stop signal is emitted to bring the machine to standstill.

The protection field is defined by the height and width of the protection field. The protected height is the range between the first and last infrared light beam of a light curtain. The protected height defines the physical size of the system to be used.



The protected width or operating range is the distance between the transmitter and receiver unit.

For an accurate detection of objects with different sizes in the hazardous area, the user can choose between light grids and light curtains with different resolutions. Here, the following rule applies: the smaller the distance between two adjacent light beams, the more accurate the detection sensitivity of the AOPD. For the detection of body parts, a distinction is made between finger, hand and body protection.

DIN EN ISO 13857 sets the biometric data for finger protection to 14 mm, for hand detection to 30 mm, for leg detection up to 70 mm and for body detection to over 70 mm. Safety light grids with 2, 3 or 4 individual beams are generally used to detect the penetration of the entire human body. Safety light curtains are multiple beam systems (Resolution < 40 mm) and can also detect smaller objects in case of intrusion into the protected field. The maintenance-free safety light curtains and light grids can be smoothly fitted using an M12 connector and are equipped a diagnostic interface and LED indication for status messages.

Depending on the type of safety light curtain or light grid used, the components offer an integrated monitoring module with start/restart inhibit and external device monitoring. Additional functions such as blanking, muting and cascading of the light curtains are available as well.

The SLC and SLG product series therefore offer a maximum of flexibility for safeguarding different points of operation.

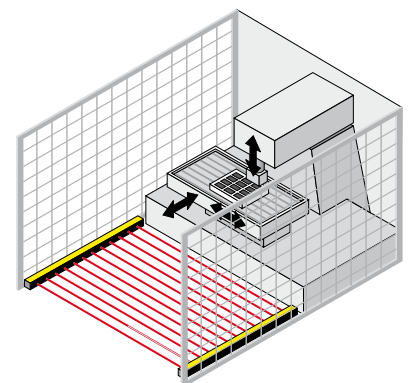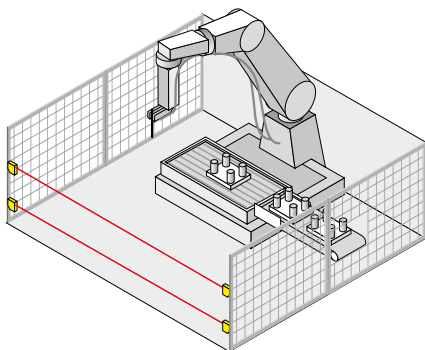

safety systems

Important conditions for the use of optoelectronic safety devices:


In order to choose the appropriate active optoelectronic protective device (AOPD) such as light barriers, light curtains/grids to use them correctly, both the requirements of the standards (EN 61496, EN ISO 13849, EN ISO 13855, C standards etc.) and product-specific features (detection sensitivity, range, etc.) must be taken into account.

AOPD's can be used, provided that:

- the dangerous movement can be stopped at all times and that it is ensured that the dangerous area can only be reached after the movement has come to standstill,
- The protected width or operating range is the distance between the transmitter and receiver unit.
- no objects (work pieces, sparks, liquids, etc.) can be ejected,
- the AOPD meet the requirements of Type 2 or Type 4 acc. to EN 61496,
- the dangerous area can only be reached by passing through the protected field of the AOPD,
- reaching over, under or through the protected field is impossible,
- the start or restart command devices are fitted in such a way that the entire hazardous area is completely visible from the outside and that it cannot be activated from within the hazardous area
- and the safety distance is calculated and constructively applied in accordance with EN ISO 13855.



The effectiveness of the safety guard corresponds to the risk assessment, which was carried out during the planning and design phase, taking all important boundary conditions, e.g. environment, machine and function into account.

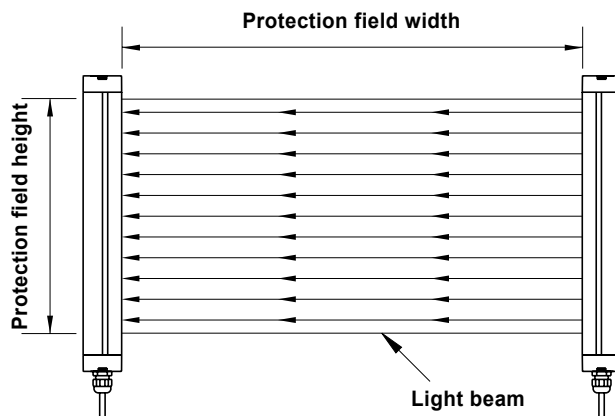

EN ISO 13855

Safety distances for light curtains

The safety laser scanners of the LS series are used for protection of man on machines, where dangerous movements can occur.

The standard EN ISO 13855 provides the user with detailed information about the calculation of the minimum safety distances. These include the following important influencing factors:

- stopping time of the entire system, taking the different reaction times of the individual systems into account (e.g. machine, safety monitoring module, AOPD etc.)
- capacity of the AOPD to detect body parts (fingers, hand and entire human body)
- set-up of the safety guard in normal condition (vertical fitting), parallel condition (horizontal fitting) or at an arbitrary angle in front of the safety guard and

- the speed at which the protection field is approached.

For the calculation of the minimum safety distance **S** to the hazardous area, EN ISO 13855 presents the following general formula:

$$S = K \times T + C$$

Where:

S the safety distance to the hazardous area (mm)

K the approach speed of the body or the body part (mm/s)

T total reaction time of the system (s) (including the machine's run-out time, the reaction time of the safety guard and the safety monitoring module etc.)

C additional distance (mm) before the safety guard

Normal approach for light curtains: (Resolution: max. 40 mm)

The minimum safety distance **S** is calculated using the following formula:

$$S = 2000 T + 8(D-14)$$

(D = Resolution).

This formula applies to safety distances up to 500 mm. The minimum safety distance **S_{min}** must not be less than 100 mm.

If the calculation produces a distance larger than 500 mm for **S**, the calculation can be repeated with a lower approach speed:

$$S = 1600 T + 8(D-14)$$

In this case, **S_{min}** may not be less than 500 mm.


If the hazardous spot of the machine can be reached from top due to its special configuration, the top beam of the light barrier must be calculated and fitted with CRO in accordance with Table 1 (EN ISO 13855).

Normal approach for light curtains: (Resolution: from 40 mm up to max. 70 mm)

The minimum safety distance **S** is calculated using the following formula:

$$S = 1600 T + 850$$

The height of the topmost light beam must be at least 900 mm, the height of the lowermost light beam maximum 300 mm above the bottom (for the protection of children younger than 14: 200 mm)

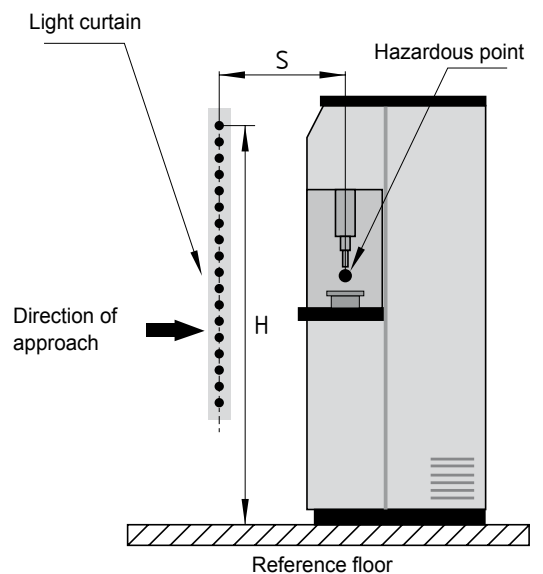

distance

**Normal approach
for light grids:
(Resolution: > 70 mm)**

The minimum safety distance **S** is calculated using the following formula:

$$S = 1600 T + 850$$

For safety guards with multiple beams, height **H** (mm) above the reference floor of the individual beams must be applied in the following way:

Number of beams	Height above the reference floor
2	400, 900
3	300, 700, 1100
4	300, 600, 900, 1200

When using light curtains or light grids, particular attention must be paid to the tampering possibilities of the safety guard and to the mechanical risks (e.g. crushing, shearing, cutting, ejection).

**Horizontal approach for
light curtains/grids
(Resolution: > 50 mm)**

The minimum safety distance **S** is calculated using the following formula:

$$S = 1600 T + 1200 - 0.4 H$$



Here, **S_{min}** is 850 mm. The lowest authorised height **H** depends on the resolution **D** of the light curtain:

$$H = 15 (D-50)$$

For this type of safety guard, the maximum height **H** is 1000 mm.

In the risk analysis, special attention must be paid to the prevention of unintentional undetected access from underneath the protection field.

Further calculation examples can be found in DIN EN ISO 13855 as well as in the mounting instructions of the SLC/SLG safety sensors.

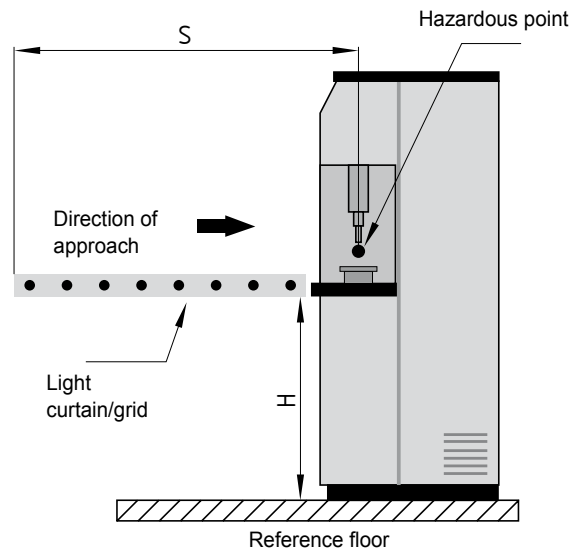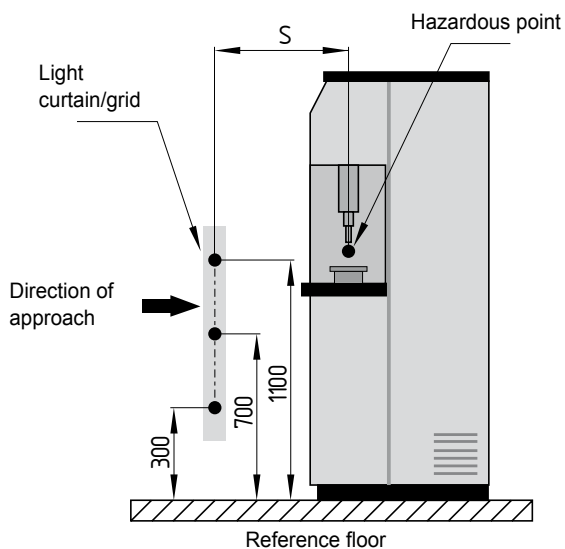

Modes of operation and functions

Master/Slave cascading

For the SLC/SLG...M/S product series, the master light curtain can be extended with another (slave) light curtain (cascading). In this way, multiple protection fields can be generated. A protection field is created between the emitter and receiver and between the slave components.

This device cascading provides for a comfortable and efficient protection of contiguous protection fields against reaching over or through the protection field. The slave light curtains are connected to the master by means of an M12 connector. The master and slave light curtains are available in different sizes and resolutions and allow for almost any combination.

Muting

If goods or objects must be transported in or out of the hazardous area without stopping the machine, the safety light curtain must be automatically and temporarily suspended.

To this end, two or four muting sensors are used to detect whether a person is approaching the hazardous area or a transport system enters or leaves the hazardous area. Suitable muting sensors are light barriers, proximity switches or position switches.

The integrated safety-muting controller of the safety light curtain or light grid monitors and controls the muting process.

The safety outputs are not disabled. Any malfunction of the monitored signal source will cause the OSSD's to be switched off. Depending on the application, different light curtains with integrated muting function are available. Detailed product information can be found in the manuals.

Blanking /Floating Blanking

If continuity of the production process is required, a part of the protection field can be blanked without triggering a stop signal. In this way, objects such as work pieces can be fed or a conveyor belt can be positioned at a fixed position in the protection field.

The integrated floating blanking function of the SLC 440 light curtains enables a flexible blanking of up to 2 adjacent light beams in the protection field of the light curtain. This function is required to ensure that one or two adjacent light beams can be interrupted at an undefined position in the protection field.

In this way, objects such as fixtures or materials with slightly varying heights can be fed through the light curtain without

triggering a stop signal. Different blanking functions are available. The distinguishing feature of the different modes is the number of light beams that can be interrupted by an object. In addition to that, it can be defined whether the object may interrupt the protection field permanently or only temporarily. The interrupted light beams can be at any position in the protection field.

Apart from the first infrared light beam (the beam closest to the connector), any light beam can be used for blanking.

When blanking is applied, the resolution of the light curtain changes. The technical documentation of the different light curtains includes the tables with the effective resolutions D to calculate the minimum safety distance to EN ISO 13855.

Further technical product information can be found in this brochure.

Cyclic operation

Cyclic operation is a mode of operation, in which the machine automatically starts a work process, as soon as the operator releases the protection zone of the light grid. A cycle is defined as the one-time interruption and release of the protection zone. In one-cycle operation, a new machine cycle is initiated, when the protection zone is interrupted one time.

Example:



The material is fed automatically without interruption of the protection zone. After initialisation, the machine starts the first cycle. The operator now interrupts the protection zone to remove the material. The next cycle starts automatically.

In two-cycle operation, a new machine cycle is started when the protection zone is interrupted twice.


Example:

The operator loads the machine and gives the start command. After the process is finished, the operator removes the processed material (1st cycle) and loads a new part for processing (2nd cycle). The next cycle starts automatically.

The light grid additionally monitors a signal (machine contact) of the machine, which signals the end of the hazardous movement. This signal is used for the cycle reset and enables an immediate intervention in the protection zone.



1 Floating-Blanking-Area
2 Movable object

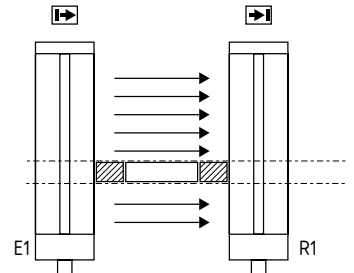



Testing of the safety guards

The master and slave light curtains are available in different sizes and resolutions and allow for almost any combination.

Initial inspection of safety guards

The initial inspection of safety guards includes the inspection of the hereafter mentioned conditions and circumstances:

- Checking the compliance of the AOPD operation with the current utilisation of the machine
- Checking the suitability and the capability of the selected safety guard, the assembly and the operating mode to counteract apparent hazards
- Checking the compliance of the AOPD with the type required by EN 61496
- Checking the compliance of the AOPD's interlinking up to the signal transmission in the forwarding control system with the required control category
- Checking whether the AOPD is tamper-proof

Periodic inspection of safety guards

In addition to the inspection services, "the initial inspection of safety guards" includes the "periodic inspection":

- Checking whether the safety guard is capable of processing the application
- Subsequent adjustment of the AOPD
- Removal of soiling
- Elimination of minor failures, for as far as this is possible within a reasonable period of time.

Are not included in the service scope: the reprogramming of the protection fields as well as the parameter setting of programmable systems.

Execution of the run-on measurement

The conductance of run-on measurements includes the hereafter described performances:

- Measuring the stopping time on the basis of multiple individual measurements
- Calculating the safety distance to EN ISO 13855 or possible other prevailing regulations, (harmonised) C-standards

The customer will receive a test report in writing of every agreed inspection service.



Always up-to-date
Online on the internet



You will find detailed information at
www.schmersal.com

Safety light barriers




System features:

- Type 2 and Type 4 to EN 61496
- Up to 4 pairs of one-way light barriers can be connected
- Different functions: Start/Restart interlock Contactor monitoring Cyclic testing
- Integrated soiling check
- Status and error indication
- Signalling outputs for external indications
- Maintenance- free
- Extremely compact design
- Simple, flexible mounting and adjustment

Safety light barriers

SLB 200

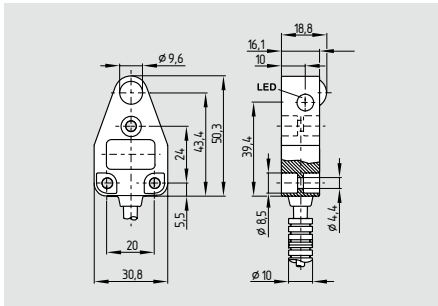

- Range to 4 m
- LEDs visible from both sides
- Protection class IP67

Technical data

Standards:	IEC/EN 61496
Control Category:	2
Enclosure:	ABS 10 % GF
Enclosure dimensions:	31 x 50.5 x 19 mm
Connection:	
- emitter:	10 cm cable with male connector M8, 3-pole
- receiver:	10 cm cable with male connector M8, 4-pole
Max. cable length:	50 m
Protection class:	IP67
Response time:	30 ms *
Range:	4 m
Start/Restart interlock:	*
Contact control:	*
Light emission wavelength:	880 nm
U _e :	24 VDC ± 20%
Safety outputs:	*
Angle of radiation:	± 4°
Min. size of object:	9 mm Ø
LED status indication:	soiling, switching condition and power on
Ambient temperature:	-10 °C ... +55 °C
Storage and transport temperature:	-20 °C ... +80 °C

* only in combination with safety monitoring module SLB 200-C04-1R


System components




SLB 200-C04-1R



Connector plug

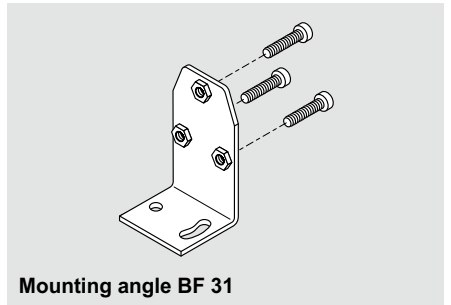

Mounting angle BF 31

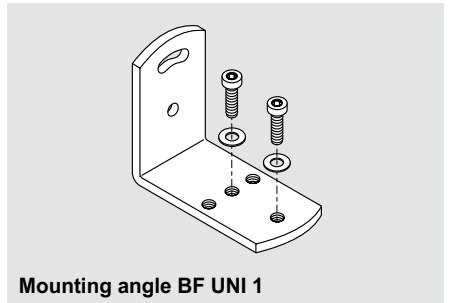

Mounting angle BF UNI 1

Approvals



Ordering details

SLB 200-①31-21

Nr.	Option	Description
①	E/R	Emitter / receiver

Note

The system components (safety monitoring module, cable, etc.) are not included in delivery.

Ordering details

Monitoring of safety light barriers
SLB 200-C04-1R **refer to page 4-6**

Connector plug (female)

for emitter: 3-pole straight	
without cable	101210562
with cable 2 m	101210564
with cable 5 m	101210566
for receiver: M8, 4-pole straight	
without cable	101210015
with cable 2 m	101209946
with cable 5 m	101209942

Mounting angles	BF 31
Mounting angles universal	BF UNI 1

Safety light barriers

SLB 200-C



- Up to two pairs of light barrier devices can be connected
- Co-ordinated for use with SLB 200 R/E safety light barriers
- 1 safety contact, STOP 0
- 1 signalling output
- Operating voltage 24 VDC
- Test input
- LED display of switching conditions
- Response time ≤ 30 ms
- Start/Restart interlock can be switched active or inactive
- Contactor monitoring can be switched active or inactive
- Additional cyclic testing

Technical data

Standards:	IEC/EN 61496-1/-2, IEC 60947-5-3, IEC 61508
Start conditions:	Test button, start-reset button, ON/OFF coding
Feedback circuit (Y/N):	yes
Max. switching frequency:	10 Hz
Rated operating voltage U_e :	24 VDC \pm 20%
Rated operating current I_e :	180 mA
Outputs:	
Stop category 0:	1
Stop category 1:	0
Number of safety contacts:	1
Number of auxiliary contacts:	0
Number of signalling outputs:	1
Max. switching capacity of the safety contacts:	8 A
Switching capacity of the signalling outputs:	500 mA
Max. fuse rating of the safety contacts:	4 A gG D-fuse
Utilisation category to EN 60947-5-1:	AC-15: 250 V / 2 A DC-13: 24 V / 2 A
Ambient conditions:	
Environmental temperature:	0 °C ... +50 °C
Storage and transport temperature:	-20 °C ... +80 °C
Protection class:	Enclosure: IP40, Terminals: IP20, Clearance: IP54
Mounting:	Snaps onto standard DIN rail to EN 60715
Connection type:	Screw connection
max. cable section:	4.0 mm ² (incl. conductor ferrules)
Dimensions (Height/Width/Depth):	84 x 45 x 118 mm

Approvals



Ordering details


SLB 200-C04-1R

Safety light barriers

Note

- Monitoring two pairs of light barrier devices and the power contactor using the SLB 200-C safety monitoring module
- Test push button $\text{\textcircled{T}}$
The test push button is connected to X13 and X14 in order to carry out a check of the light barrier monitoring function. The terminals X15 and X16 must be bridged.
- The wiring diagram is shown for the de-energised condition.
- Contactor check
To monitor an external contactor, the feedback circuit is connected to X17 and X18. The terminals X19 and X20 must be bridged.
- Start push button $\text{\textcircled{S}}$
The start push button can be used to start the monitoring of the light barriers for a new start or after an interruption. The terminals X3 and X4 must be bridged.
- It is also possible to connect only one pair of light barrier devices.

Wiring diagram

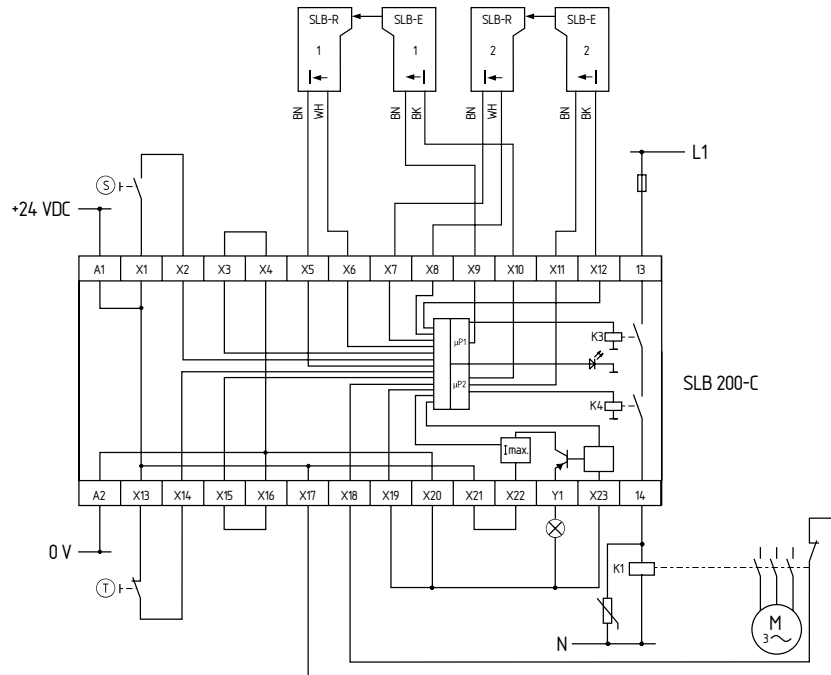

Note

In order to set for the desired mode of operation and number of light barriers connected, remove the front cover of the safety monitoring module. As supplied all switches are in Position 1.

The required functions can be selected by means of the internal DIPswitches.

	DIPswitch 1	DIPswitch 2	DIPswitch 3
Position 1	With contactor check	With start/restart interlock	Connection of two light barriers
Position 2	Without contactor check	Without start/restart interlock	Connection of one light barrier

Inductive loads (e.g. contactors, relays, etc.) are to be suppressed by means of a suitable circuit.

Safety light barriers

SLB 400-C



- Up to 4 light barrier pairs SLB 400 can be connected
- Co-ordinated for use with SLB 400 R/E safety light barriers
- 2 safety contacts, STOP 0
- 2 signalling outputs
- Cross-wire monitoring
- ISD Integral System Diagnostics
- Operating voltage 24 VDC
- Feedback circuit to monitor external contactors
- Two short-circuit proof additional transistor outputs
- Response time ≤ 30 ms
- Start/Restart interlock can be switched active or inactive
- Contactor monitoring can be switched active or inactive
- Can be coded

Technical data

Standards:	IEC/EN 61496-1/-2, IEC 60947-5-3, IEC 61508
Start conditions:	Start-reset button, ON/OFF coding
Feedback circuit (Y/N):	yes
Max. switching frequency:	10 Hz
Rated operating voltage U_e :	24 VDC \pm 15%
Rated operating current I_e :	0.3 A without additional transistor outputs and safety light barriers
Max. fuse rating of the operating voltage:	1 A
Outputs:	
Stop category 0:	2
Stop category 1:	0
Number of safety contacts:	2
Number of auxiliary contacts:	2
Number of signalling outputs:	2
Max. switching capacity of the safety contacts:	2 A
Switching capacity of the auxiliary contacts:	2 A
Switching capacity of the signalling outputs:	100 mA
Max. fuse rating of the safety contacts:	2 A gG D-fuse
Utilisation category to EN 60947-5-1:	AC-15: 250 V / 2 A DC-13: 24 V / 2 A
LED display:	ISD
Ambient conditions:	
Environmental temperature:	0 °C ... +55 °C
Storage and transport temperature:	-25 °C ... +70 °C
Protection class:	Enclosure: IP40, Terminals: IP20, Clearance: IP54
Mounting:	Snaps onto standard DIN rail to EN 60715
Connection type:	Screw connection
max. cable section:	4.0 mm ² (incl. conductor ferrules)
Dimensions (Height/Width/Depth):	75 x 99.7 x 110 mm

Approvals



Ordering details


SLB 400-C10-1R

Safety light barriers

Note


- Monitoring up to four pairs of light barrier devices and the power contactors using the SLB 400-C safety monitoring module
- The wiring diagram is shown for the de-energised condition.
- Connection of two pairs of safety light barrier devices

When two pairs of safety light barriers are connected, the terminals X9-X10 and X11-X12 must be bridged.

- Restart push button 

The restart function can be selected by means of the DIPswitches. When a start push button is connected to X5 and X6, it must be operated for min. 250 ms and max. 5 s after an interruption of the safety light barriers.

Wiring diagram

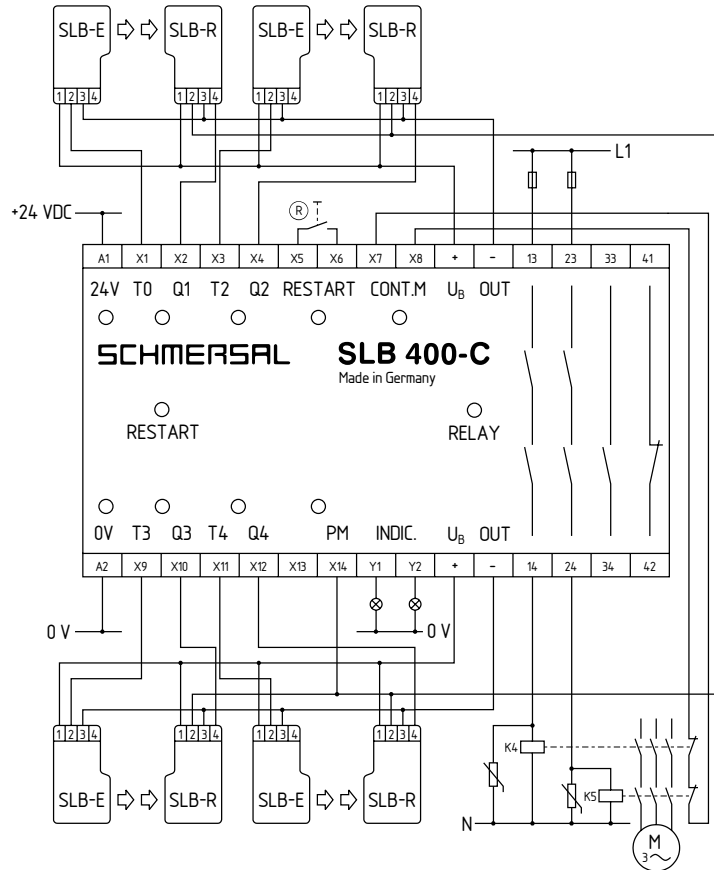

ISD

The following faults are registered by the safety monitoring modules and indicated by ISD

- Short-circuit on the connecting leads
- Interruption of the connecting leads
- Failure of the safety relay to pull-in or drop-out
- Fault on the input circuits or the relay control circuits of the safety monitoring module
- Mutual influence between the connected pairs of light barrier device and others on neighbouring systems


Note

The ISD tables (Integral System Diagnostics) for analysis of the fault indications and their causes are shown in the manual.

Inductive loads (e.g. contactors, relays, etc.) are to be suppressed by means of a suitable circuit.

Safety light barriers accessories SLB 200 and SLB 400

System components




Mirror SLB 200/400 SMA 80


System components




Mounting post ST 1250




Mounting angle BF SMA 80-1



Floor-stand base STB 1



Mounting angle BF SMA 80-2



T-slot nut NST 20-8


Ordering details

Mirror **SMA 80**
 Mounting angles for mirror **BF SMA 80-1**
 Mounting angles for mirror **BF SMA 80-2**
 T-slot nut **NST 20-8**

Ordering details

Mounting post **ST 1250**
 Floor-stand base **STB 1**

Safety light curtains and safety light grids

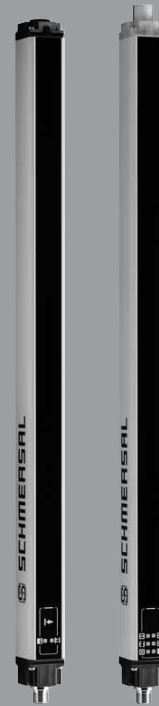


System features:

- Type 2 and Type 4 to EN 61496
- Different integrated functionalities:
 - Start/restart interlock
 - Contactor control
 - Integrated double acknowledgment
 - Muting
 - Blanking
 - Master/Slave
- Diagnostics display
- Optical synchronisation
- Maintenance- free
- Compact design
- Simple, flexible mounting and adjustment

Safety light curtains and safety light grids

SLC 220 standard

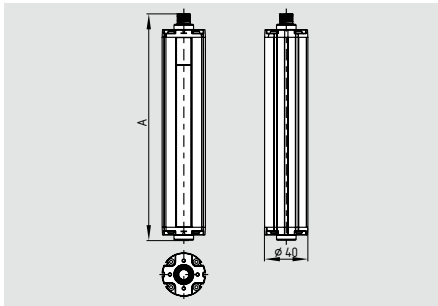

- **Safety light curtain**
- Type 2 to IEC/EN 61496-1, -2
- Resolution 30 and 80 mm
- Protection field heights 175 mm ... 1675 mm
- Integrated start/restart interlock
- Integrated contactor control
- Integrated blanking function
- Diagnostic and parametrization interface
- Range 0.3 m ... 14 m
- Integrated self-test
- Fail-safe transistor outputs
- Status display
- Protection class IP65
- Signalling output

Legend: A = Total length


Protection field height 175 mm

A = 216 mm

Protection field height 250 ... 1675 mm

A = 28.5 mm + Protection field height

SLG 220 standard

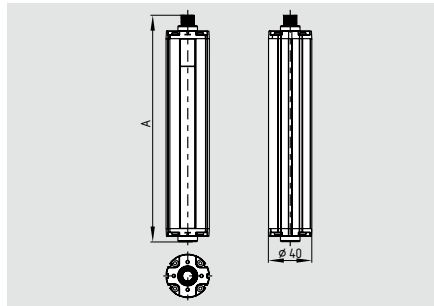

- **Safety light grid**
- 2-, 3- or 4-beam light grid
- Range 0.3 ... 30 m

Legend: A = Total length

A = 78.5 mm + Distance between outermost beams

Technical data

Standards: IEC/EN 61496-1/-2
 Category: Type 2
 Enclosure: aluminium
 Enclosure dimensions: Ø 40 mm
 Connection: Connector plug
 M12, 8-pole
 Max. cable length: 100 m / 1Ω
 Protection class: IP65 to EN 60529
 Response time: 9 ... 45 ms (depends on length and resolution)

Detection sensitivity (Resolution): 30 and 80 mm

Protection field height:
 - Resolution 30 mm 175 ... 1675 mm
 - Resolution 80 mm 325 ... 1675 mm
 - 2-, 3-, 4-beam 500, 800, 900 mm

Protection field width, Range:
 - SLC 0.3 ... 6 m (Standard),
 4 ... 14 m (High range)
 - SLG 5 ... 30 m (High range)

Start/restart interlock: Integrated

Contactor control: Integrated

Blanking function: Integrated

Light emission wavelength: 880 nm (infrared)

U_e: 24 VDC ± 10%

Safety outputs: 2 x PNP, 200 mA

Signalling output: PNP 100 mA

Power consumption: Emitter 4 W,
Receiver 8 W

Data interface: RS 485

Status and diagnostics: LED display

Ambient temperature: -10 °C ... +50 °C

Storage and transport temperature: -20 °C ... +70 °C

Classification:

Standards: EN ISO 13849-1; IEC 61508;
IEC 60947-5-3

PL: up to d

Category: up to 2

PFH-value: 3.59 x 10⁻⁸/h

SIL: up to 2

Service life: 20 years

Approvals



Ordering details

SLC 220-E/R^①-^②RFB-^③

No.	Option	Description
①	xxxx	Protected heights (mm), available lengths: 0175*, 0250*, 0325, 0475, 0625, 0775, 0925, 1075, 1225, 1375, 1525, 1675
②	30, 80	Resolution 30, 80 mm
③	H	Range 0.3 m ... 6 m High Range 4 m ... 14 m

Note:

* only for resolution 30 mm

Approvals



Ordering details

SLG 220-E/R^①RF-^②

No.	Option	Description
①		Distance between outermost beams: 0500-02 500 mm, 2-beam 0800-03 800 mm, 3-beam 0900-04 900 mm, 4-beam
②	H	Range 0.3 m ... 6 m High Range 5 m ... 30 m

Mounting brackets are included in the delivery.

Note:

Converter for the parametrization NSR 0700

Ordering details

Connector:

Female connector M12, 8-pole straight

for emitter/receiver


cable length 5 m **101207728**

cable length 10 m **101207729**

cable length 20 m **101207730**

Safety light curtains and safety light grids

SLG 220-P

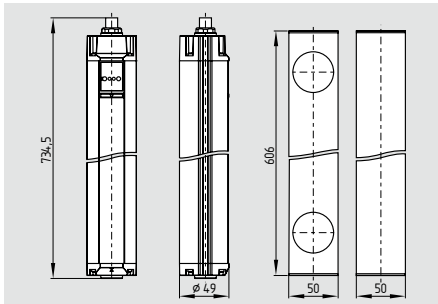

- **Safety light grid**
- Emitter and receiver in one enclosure (retro reflector)
- Type 2 to IEC/EN 61496-1, -2
- Protection field heights 500 mm
- 2-beam light grid
- Range 0.3 m ... 6 m
- Fail-safe transistor outputs
- Status display
- Protection class IP65


Technical data

Standards:	IEC/EN 61496-1/-2
Category:	Type 2
Enclosure:	aluminium
Enclosure dimensions:	Ø 40 mm
Deflecting mirror:	50 x 50 x 606 mm
Connection:	Connector plug
	M12, 8-pole
Max. cable length:	100 m / 1 Ω
Protection class:	IP65 to EN 60529
Response time:	12 ms
Detection sensitivity (Resolution):	500 mm
Protection field height:	500 mm
Protection field width, Range:	0.3 m ... 6 m
Light emission wavelength:	880 nm (infrared)
U _e :	24 VDC ± 10%
Safety outputs:	2 x PNP, 200 mA
Signalling output:	PNP, 100 mA
Power consumption:	10 W
Data interface:	-
Status and diagnostics:	LED display
Ambient temperature:	-10 °C ... +50 °C
Storage and transport temperature:	-20 °C ... +70 °C

Classification:

Standards:	EN ISO 13849-1; IEC 61508;
	IEC 60947-5-3
PL:	up to d
Category:	up to 2
PFH-value:	3.59 x 10 ⁻⁷ /h
SIL:	up to 2
Service life:	20 years

Technical data

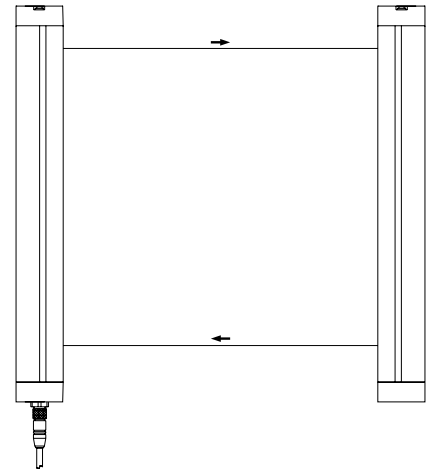

Approvals



Ordering details

SLG 220-P-E/R0500-02RF
ULS-P-0500

Note

Mounting brackets are included in the delivery.

Note:

Converter for the parametrization NSR 0700


Ordering details

Connector:

Female connector M12, 8-pole straight	
cable length 5 m	101207728
cable length 10 m	101207729
cable length 20 m	101207730

Safety light curtains and safety light grids

SLC 220 Master / Slave

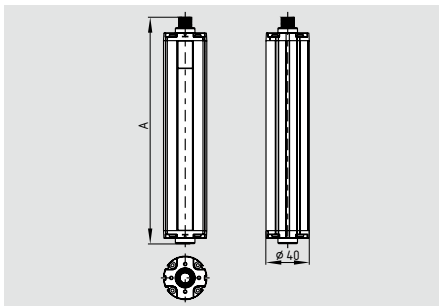

- **Safety light curtain**
- Type 2 to IEC/EN 61496-1, -2
- Resolution 30 and 80 mm
- Protection field height:
 - Master 175 mm ... 1675 mm
 - Slave 325 mm ... 775 mm
- Integrated start/restart interlock
- Integrated contactor control
- Diagnostic and parametrization interface
- Cascading of Master and Slave devices
- Range 0.3 m ... 6 m
- Fail-safe transistor outputs
- Status display
- Protection class IP65
- Signalling output
- Integrated self-test

Legend: A = Total length

Protection field height 175 mm

A = 216 mm

Protection field height 250 ... 1675 mm

A = 28.5 mm + Protection field height

Technical data

Standards: IEC/EN 61496-1/-2
 Category: Type 2
 Enclosure: aluminium
 Enclosure dimensions: Ø 40 mm
 Connection: Connector plug
 - Master emitter: M12, 8-pole
 - Master receiver: M12, 8-pole
 - Slave emitter: M12, 6-pole
 - Slave receiver: M12, 6-pole
 Max. cable length: 100 m / 1Ω
 Max. cable length: (Master/Slave) 0.3 m
 Protection class: IP65 to EN 60529
 Response time: 12 ... 65 ms (depends on length and resolution)

Detection sensitivity (Resolution): 30 and 80 mm
 Protection field height:
 - Resolution 30 mm 175 ... 2450 mm
 - Resolution 80 mm 325 ... 2450 mm
 Protection field width, Range: 0.3 ... 6 m
 Start/restart interlock: Integrated
 Contactor control: Integrated
 Cascading: (Master/Slave) Possible
 Light emission wavelength: 880 nm (infrared)
 U_e: 24 VDC ± 10%
 Safety outputs: 2 x PNP, 200 mA
 Signalling output: PNP, 100 mA
 Power consumption: Emitter 4 W, Receiver 8 W
 Data interface: RS 485
 Status and diagnostics: LED display
 Ambient temperature: -10 °C ... +50 °C
 Storage and transport temperature: -20 °C ... +70 °C

Classification:
 Standards: EN ISO 13849-1; IEC 61508; IEC 60947-5-3
 PL: up to d
 Category: up to 2
 PFH-value: 3.59 x 10⁻⁸/h
 SIL: up to 2
 Service life: 20 years

System components



Connector

Approvals



Ordering details

SLC 220-E/R①-②-RFB③

No.	Option	Description
①	xxxx	Protected heights (mm), available lengths: 0175*, 0250*, 0325, 0475, 0625, 0775, 0925, 1075, 1225, 1375, 1525, 1675
②	30, 80	Resolution 30, 80 mm
③	M	Master function
	S	Slave function**

Different lengths and resolutions can be combined for Master/Slave.

Mounting brackets are included in the delivery.

Ordering details


Note:
 * only for resolution 30 mm
 ** only protected heights 325 mm ... 775 mm
 Converter for the parametrization NSR 0700

Ordering details

Connector:
 Female connector M12, 8-pole straight
for emitter/receiver
 cable length 5 m **101207728**
 cable length 10 m **101207729**
 cable length 20 m **101207730**
for Master/Slave Verbindung
 Female connector 2 x M12, 6-pole straight
 cable length 0.3 m **KA-0907**

Safety light curtains and safety light grids


SLC 220 IP69K

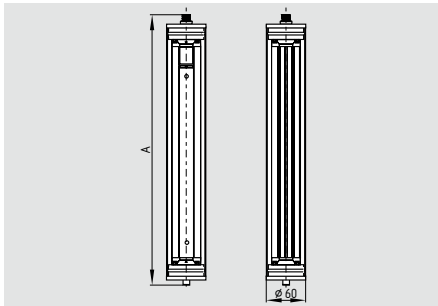

- **Safety light curtain**
- Type 2 to IEC/EN 61496-1, -2
- Resolution 30 and 80 mm
- Protection field heights 175 mm ... 1675 mm
- Protection class IP69K
- Integrated start/restart interlock
- Integrated contactor control
- Integrated blanking function
- Diagnostic and parametrization interface
- Range 0.3 m ... 14 m
- Integrated self-test
- Fail-safe transistor outputs
- Status display
- Signalling output

Legend: A = Total length
A = 54 mm + Protection field height

SLG 220 IP69K

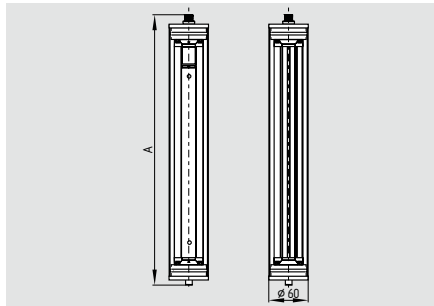

- **Safety light grid**
- 2-, 3- or 4-beam light grid
- Range 0.3 ... 30 m

Legend: A = Total length
A = 104 mm + Distance between outermost beams

Technical data

Standards: IEC/EN 61496-1/-2
 Category: Type 2
 Enclosure: aluminium protective tube housing PMMA
 Enclosure dimensions: Ø 60 mm
 Connection: Cable (5 m) with connector M12, 8-pole
 Max. cable length: 100 m / 1Ω
 Protection class: IP69K
 Response time: 9 ... 45 ms (depends on length and resolution)

Detection sensitivity (Resolution): 30 and 80 mm
 Protection field height:
 - Resolution 30 mm 175 ... 1675 mm
 - Resolution 80 mm 325 ... 1675 mm
 - 2-, 3-, 4-beam 500, 800, 900 mm
 Protection field width, Range:

0.3 ... 6 m (Standard),
 - SLC 4 ... 14 m (High range)
 - SLG 5 ... 30 m (High range)

Start/restart interlock: Integrated
 Contactor control: Integrated
 Blanking function: Integrated
 Light emission wavelength: 880 nm (infrared)
 U_e: 24 VDC ± 10%
 Safety outputs: 2 x PNP, 200 mA
 Signalling output: PNP, 100 mA
 Power consumption: Emitter 4 W, Receiver 8 W

Data interface: RS 485
 Status and diagnostics: LED display
 Ambient temperature: -10 °C ... +50 °C
 Storage and transport temperature: -20 °C ... +70 °C

Classification:
 Standards: EN ISO 13849-1; IEC 61508; IEC 60947-5-3
 PL: up to d
 Category: up to 2
 PFH-value: 3.59 x 10⁻⁸/h
 SIL: up to 2
 Service life: 20 years

Approvals



Approvals



Ordering details

SLC 220-E/R^①-②-69-RFB-③

No.	Option	Description
①	xxxx	Protected heights (mm), available lengths: 0175*, 0250*, 0325, 0475, 0625, 0775, 0925, 1075, 1225, 1375, 1525, 1675
②	30, 80	Resolution 30, 80 mm
③	H	Range 0.3 m ... 6 m High Range 4 m ... 14 m

Note:
* only for resolution 30 mm

Ordering details

SLG 220-E/R^①-69-RF-②

No.	Option	Description
①		Distance between outermost beams: 0500-02 500 mm, 2-beam 0800-03 800 mm, 3-beam 0900-04 900 mm, 4-beam
②	H	Range 0.3 m ... 6 m High Range 5 m ... 30 m

Mounting brackets (**V4A**) are included in the delivery.

Note:
Converter for the parametrization NSR 0700


Ordering details

Connector:

Female connector M12, 8-pole straight
 cable length 5 m **101207728**
 cable length 10 m **101207729**
 cable length 20 m **101207730**

Safety light curtains and safety light grids


SLC 420 standard

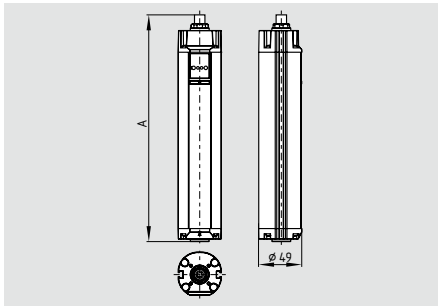

- **Safety light curtain**
- Type 4 to IEC/EN 61496-1, -2
- Resolution 14, 30 and 50 mm
- Protection field heights 170 mm ... 1770 mm
- Integrated start/restart interlock
- Integrated contactor control
- Integrated blanking function (fixed and mobile blanking)
- Diagnostic and parametrization interface
- Range 0.3 m ... 18 m
- Fail-safe transistor outputs
- Optical synchronisation
- Status display
- Protection class IP67

Legend: A = Total length
A = 84.5 mm + Protection field height

SLG 420 standard

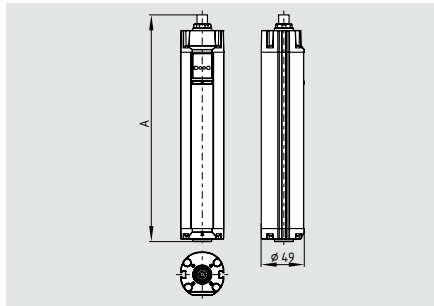

- **Safety light grid**
- 2-, 3- or 4-beam light grid
- Range 0.3 ... 40 m

Legend: A = Total length
2-beam A = 734.5 mm
3 and 4-beam A = 1054.5 mm

Technical data

Standards: IEC/EN 61496-1/-2
Category: Type 4
Enclosure: aluminium
Enclosure dimensions: Ø 49 mm
Connection: Connector plug
- Emitter: M12, 4-pole,
- Receiver: M12, 8-pole
Max. cable length: 100 m / 1 Ω
Protection class: IP67 to EN 60529
Response time: 10 ... 27 ms (depends on length and resolution)

Detection sensitivity (Resolution): 14, 30 and 50 mm
Protection field height:
- Resolution 14 mm 170 ... 1450 mm
- Resolution 30, 50 mm 170 ... 1770 mm
- 2-, 3-, 4-beam 500, 800, 900 mm

Protection field width, Range:
- Resolution 14 mm 0.3 m ... 7 m
- Resolution 30, 50 mm 0.3 m ... 10 m
- High Range/Resolution 30 mm 0.3 m ... 18 m
- 2-, 3-, 4-beam 0.3 m ... 18 m
- High Range 2-, 3-, 4-beam 8 m ... 40 m

Start/restart interlock: Integrated
Contactor control: Integrated
Blanking function: Integrated
Cascading: (Master/Slave) -
Light emission wavelength: 880 nm (infrared)
U_e: 24 VDC ± 10%
Safety outputs: 2 x PNP, 500 mA
Power consumption: Emitter 4 W, Receiver 8 W

Data interface: RS 485
Status and diagnostics: LED display
Ambient temperature: -10 °C ... +50 °C
Storage and transport temperature: -20 °C ... +70 °C

Classification:
Standards: EN ISO 13849-1; IEC 61508; IEC 60947-5-3

PL: up to e
Category: up to 4
PFH-value: 7.42 x 10⁻⁹/h
SIL: up to 3
Service life: 20 years

Approvals



Ordering details

SLC 420-E/R①-②-RFB-③

No.	Option	Description
①	xxxx	Protected heights (mm) available lengths: 0170, 0250, 0330, 0410, 0490, 0570, 0650, 0730, 0810, 0890, 0970, 1050, 1130, 1210, 1290, 1370, 1450, 1530*, 1610*, 1690*, 1770*
②	14, 30, 50	Resolution 14, 30, 50 mm
③		Range 0.3 m ... 7 m** Range 0.3 m ... 10 m * High Range* 0.3 m ... 18 m***
	H	

Approvals

Ordering details

SLG 420-E/R①-RF-②

No.	Option	Description
①		Distance between outermost beams: 0500-02 500 mm, 2-beam 0800-03 800 mm, 3-beam 0900-04 900 mm, 4-beam
②	H	Range 0.3 m ... 18 m Range 8 m ... 40 m

Mounting brackets are included in the delivery.

Note:
* only for resolution 30 mm, 50 mm
** only for resolution 14 mm
*** only for resolution 30 mm

Converter for the parametrization NSR 0801

Ordering details

Connector:

Female connector M12, 4-pole straight
for emitter


cable length 5 m **101207741**
cable length 10 m **101207742**
cable length 20 m **101207743**

Female connector M12, 8-pole straight
for receiver

cable length 5 m **101207728**
cable length 10 m **101207729**
cable length 20 m **101207730**

Safety light curtains and safety light grids

SLC 420 Master / Slave

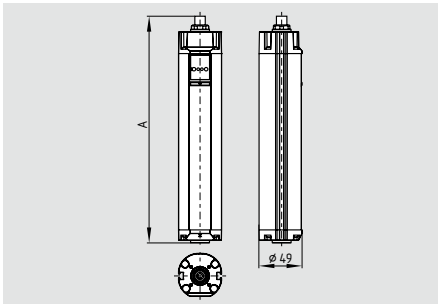

- **Safety light curtain**
- Type 4 to IEC/EN 61496-1, -2
- Resolution 14, 30 and 50 mm
- Protection field height:
Master 170 mm ... 1770 mm
Slave 170 mm ... 650 mm
- Integrated start/restart interlock
- Integrated contactor control
- Integrated blanking function
- Diagnostic and parametrization interface
- Cascading of Master and Slave devices
- Range 0.3 m ... 18 m
- Fail-safe transistor outputs
- Optical synchronisation
- Status display

Legend: A = Total length
A = 84.5 mm + Protection field height

Technical data

Standards: IEC/EN 61496-1/-2
 Category: Type 4
 Enclosure: aluminium
 Enclosure dimensions: Ø 49 mm
 Connection: Connector plug
 - Master emitter: M12, 4-pole
 - Master receiver: M12, 8-pole
 - Slave emitter: M12, 4-pole
 - Slave receiver: M12, 8-pole
 Max. cable length: 100 m / 1 Ω
 Max. cable length: (Master/Slave) 0.8 m
 Protection class: IP67 to EN 60529
 Response time: 10 ... 37 ms (Depends on length and resolution)

Detection sensitivity (Resolution): 14, 30 and 50 mm
 Protection field height:
 - Resolution 14 mm 170 ... 2100 mm
 - Resolution 30, 50 mm 170 ... 2420 mm
 Protection field width, Range:
 - Resolution 14 mm 0.3 m ... 7 m
 - Resolution 30, 50 mm 0.3 m ... 10 m
 - High Range 0.3 m ... 18 m
 Start/restart interlock: Integrated
 Contactor control: Integrated
 Blanking function: Integrated
 Cascading: (Master/Slave) Possible
 Light emission wavelength: 880 nm (infrared)
 U_e: 24 VDC ± 10%
 Safety outputs: 2 x PNP, 500 mA
 Power consumption: Emitter 4 W, Receiver 8 W
 Data interface: RS 485
 Status and diagnostics: LED display
 Ambient temperature: -10 °C ... +50 °C
 Storage and transport temperature: -20 °C ... +70 °C

Classification:
 Standards: EN ISO 13849-1; IEC 61508; IEC 60947-5-3
 PL: up to e
 Category: up to 4
 PFH-value: 7.42 x 10⁻⁹/h
 SIL: up to 3
 Service life: 20 years

System components



Connector

Approvals



Ordering details

SLC 420-E/R①-②-RFB-③④

No.	Option	Description
①	xxxx	Protected heights (mm) available lengths: 0170, 0250, 0330, 0410, 0490, 0570, 0650, 0730, 0810, 0890, 0970, 1050, 1130, 1210, 1290, 1370, 1450, 1530*, 1610*, 1690*, 1770*
②	14, 30, 50	Resolution 14, 30, 50 mm
③		Range 0.3 m ... 7 m** Range 0.3 m ... 10 m* High Range 0.3 m ... 18 m**
	H**	

Ordering details

SLC 420-E/R①-②-RFB-③④

No.	Option	Description
④	M	Master function
	S***	Slave function

Mounting brackets are included in the delivery.

Note:
 * only for resolution 30 mm
 ** only for resolution 30 and 50 mm
 *** Protection field heights 170 ... 650 mm

Converter for the parametrization NSR 0801

Ordering details

Connector:


Female connector M12, 4-pole straight for emitter	
cable length 5 m	101207741
cable length 10 m	101207742
cable length 20 m	101207743
Female connector M12, 8-pole straight for receiver	
cable length 5 m	101207728
cable length 10 m	101207729
cable length 20 m	101207730

for Master/Slave connection:

Female connector M12, 4-pole straight for emitter cable length 0.8 m	101207744
Female connector M12, 8-pole straight for receiver cable length 0.8 m	101207749

Safety light curtains and safety light grids


SLC 420 IP69K

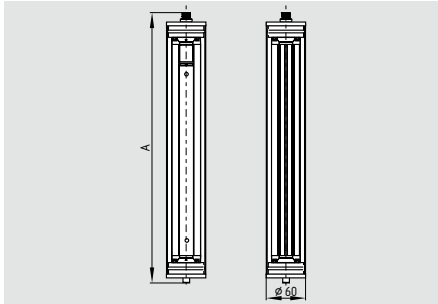

- **Safety light curtain**
- Type 4 to IEC/EN 61496-1, -2
- Resolution 14 mm, 30 mm
- Protection field heights 170 mm ... 1450 mm
- Protection class IP69K
- Integrated start/restart interlock
- Integrated contactor control
- Integrated blanking function (fixed and mobile blanking)
- Diagnostic and parametrization interface
- Range 0.3 m ... 10 m
- Fail-safe transistor outputs
- Optical synchronisation
- Status display

Legend: A = Total length
A = 97 mm + Protection field height

SLG 420 IP69K

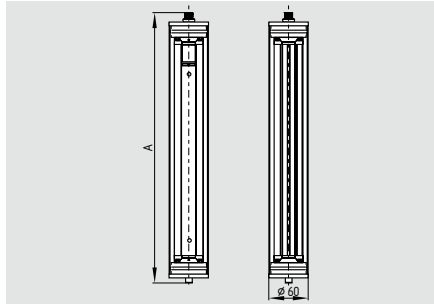

- **Safety light grid**
- 2-, 3- or 4-beam light grid
- Range 0.3 ... 18 m

Legend: A = Total length
2-beam A = 747 mm
3 and 4-beam A = 1067 mm

Technical data

Standards:	IEC/EN 61496-1/-2
Category:	Type 4
Enclosure:	aluminium protective tube housing PMMA
Enclosure dimensions:	Ø 60 mm
Connection:	Cable (5 m) with
- Receiver	connector M12, 8-pole
- Emitter	connector M12, 4-pole
Max. cable length:	100 m / 1 Ω
Protection class:	IP69K to EN 60529
Response time:	10 ... 27 ms (depends on length and resolution)
Detection sensitivity (Resolution):	14, 30 mm
Protection field height:	
- Resolution 14, 30 mm	170 ... 1450 mm
- 2-, 3-, 4-beam	500, 800, 900 mm
Protection field width, Range:	
- Resolution 14 mm	0.3 m ... 7 m
- Resolution 30 mm	0.3 m ... 10 m
- 2-, 3-, 4-beam	0.3 m ... 18 m
Start/restart interlock:	Integrated
Contactor control:	Integrated
Blanking function:	Integrated
Cascading: (Master/Slave)	-
Light emission wavelength:	880 nm (infrared)
U _e :	24 VDC ± 10%
Safety outputs:	2 x PNP, 500 mA
Power consumption:	Emitter 4 W, Receiver 8 W
Data interface:	RS 485
Status and diagnostics:	LED display
Ambient temperature:	-10 °C ... +50 °C
Storage and transport temperature:	-20 °C ... +70 °C
Classification:	
Standards:	EN ISO 13849-1; IEC 61508; IEC 60947-5-3
PL:	up to e
Category:	up to 4
PFH-value:	7.42 x 10 ⁻⁹ /h
SIL:	up to 3
Service life:	20 years

Approvals



Approvals



Ordering details

SLC 420-E/R①-②-69-RFB

No.	Option	Description
①	xxxx	Protected heights (mm) available lengths: 0170, 0250, 0330, 0410, 0490, 0570, 0650, 0730, 0810, 0890, 0970, 1050, 1130, 1210, 1290, 1370, 1450
②	14	Resolution 14 mm with a range of 0.3 m ... 7 m
	30	Resolution 30 mm with a range of 0.3 m ... 10 m

Ordering details

SLG 420-E/R①-69-RF


No.	Option	Description
①		Distance between outermost beams:
	0500-02	500 mm, 2-beam
	0800-03	800 mm, 3-beam
	0900-04	900 mm, 4-beam

Mounting brackets (**V4A**) are included in the delivery.

Note:
Converter for the parametrization NSR 0801

Safety light curtains and safety light grids

SLG 422-P

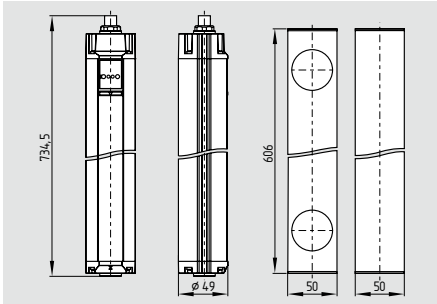

- **Safety light grid**
- Emitter and receiver in one enclosure (retro reflector)
- Type 4 to IEC/EN 61496-1, -2
- Protection field heights 500 mm
- 2-beam light grid
- Integrated start/restart interlock
- Integrated contactor control
- Range 0.3 m ... 7 m
- Fail-safe transistor outputs
- Status display
- Protection class IP67


Technical data

Standards: IEC/EN 61496-1/-2
 Category: Type 4
 Enclosure: aluminium
 Enclosure dimensions: Ø 49 mm
 Deflecting mirror: 50 x 50 x 606 mm
 Connection: Connector plug
 M12, 8-pole
 Max. cable length: 100 m / 1 Ω
 Protection class: IP67 to EN 60529
 Response time: 10 ms
 Detection sensitivity (Resolution): 500 mm
 Protection field height: 500 mm
 Protection field width, Range: 0.3 m ... 7 m
 Start/restart interlock: Integrated
 Contactor control: Integrated
 Light emission wavelength: 880 nm (infrared)
 U_e: 24 VDC ± 10%
 Safety outputs: 2 x PNP, 500 mA
 Power consumption: 10 W
 Data interface: -
 Status and diagnostics: LED display
 Ambient temperature: -10 °C ... +50 °C
 Storage and transport temperature: -20 °C ... +70 °C

Classification:

Standards: EN ISO 13849-1; IEC 61508;
 IEC 60947-5-3
 PL: up to e
 Category: up to 4
 PFH-value: 7.42 x 10⁻⁹/h
 SIL: up to 3
 Service life: 20 years

Technical data

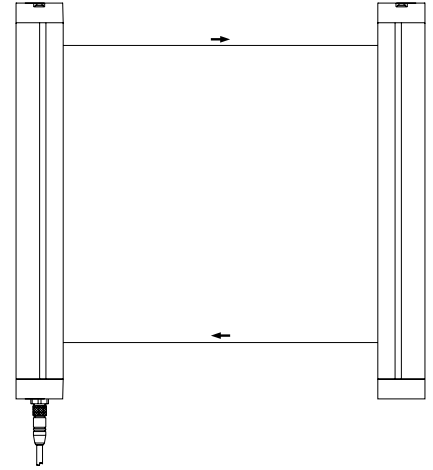

Approvals



Ordering details

SLG 422-P-E/R0500-02-RF
 ULS-P-0501

Note

Mounting brackets are included in the delivery.

Note:

Converter for the parametrization NSR 0801

Ordering details

Connector:

Female connector M12, 8-pole straight
 cable length 5 m **101207728**
 cable length 10 m **101207729**
 cable length 20 m **101207730**

Safety light curtains and safety light grids

SLC 430



- **Safety light curtain**
- Type 4 to IEC/EN 61496-1, -2
- Resolution 30 mm
- Protection field heights 236 mm ... 1804 mm
- Slim design, size 12 x 20 mm
- Integrated start/restart interlock
- Integrated contactor control
- Range 0.3 m ... 3.5 m*
- Status display
- Protection class IP65

NSR-0605



Enclosure dimensions: 240 x 160 mm

Technical data

Standards:	IEC/EN 61496-1/-2
Category:	Type 4 in combination with evaluation unit NSR-0605
Enclosure:	aluminium
Enclosure dimensions:	12 x 20 mm
Connection:	Connector plug M12, 4-pole
Max. cable length:	100 m / 1 Ω
Protection class:	IP65 to EN 60529
Response time including relay output:	50 ms
Detection sensitivity (Resolution):	30 mm
Protection field height:	236 ... 1804 mm
Protection field width, Range*:	0.3 m ... 3.5 m
Start/restart interlock:	Integrated
Contactor control:	Integrated
Light emission wavelength:	880 nm (infrared)
U _e :	22 ... 30 VDC 18 ... 25 VAC
Power consumption:	8 W
System:	
Data interface:	RS 485
Status and diagnostics:	LED display
Ambient temperature:	0 °C ... +50 °C
Storage and transport temperature:	-10 °C ... +70 °C
Safety outputs:	2 x Relay contact 250 V / 4 A
Signalling output:	1 x Relay contact 42 V / 4 A
Classification:	
Standards:	EN ISO 13849-1; IEC 61508; IEC 60947-5-3
PL:	up to e
Category:	up to 4
PFH-value:	1.26 x 10 ⁻⁸ /h
SIL:	up to 3
Service life:	20 years

Approvals



Ordering details

SLC 430-E/R①-30-RF-SYS

No.	Option	Description
①	xxxx	Protected heights (mm) available lengths: 0236, 0460, 0684, 0908, 1132, 1356, 1580, 1804

Note:

* Range up to 5 m upon request

Ordering details

Included in delivery:

- Emitter and receiver including mounting set
- Evaluation unit **NSR-0605**,
- Connector set (cable length 5 m) **101207718**

Ordering details

Connector:

Female connector M8, 4-pole straight	
for emitter/receiver	
cable length 5 m	101207718
cable length 10 m	101207719

Safety light curtains with integrated muting-, blanking- and Cyclic-function





System features:

- Type 4 to IEC 61496
- Integrated muting function
- Muting sensors can be directly connected
- Integrated override function
- Integrated cyclic operation function
- Diagnostics display
- Optical synchronisation
- Compact design
- Simple, flexible mounting and adjustment


Safety light curtains with integrated muting-, blanking- and Cyclic-function

SLC/SLG 425I

The SLC/SLG 415I is a system for universal use with integrated muting function. The M8 connectors allow a direct connection and flexible positioning of the different muting sensors (e.g. inductive, capacitive or optical sensors). In this way, a safe triggering of the muting function can be obtained for objects of different sizes. The additional integrated override function allows for a controlled restart of the machine to transport the accumulated material out of the protection field after a failure. The safety light curtains/grids with muting function enable a smooth and trouble-free material feeding (input and output), whilst offering a permanent protection of human life.




- Integrated muting function for material transport in 1 or 2 directions
- Connection of 2 or 4 external muting sensors
- Connection of different muting sensors
- Direct connection (M8) of the muting sensors to the SLC/SLG
- Muting controller for crosswise or parallel arrangement of the external sensors
- Adjustable muting time of 30 s, 90 min or 100 h
- Integrated override function
- Range up to 18 m

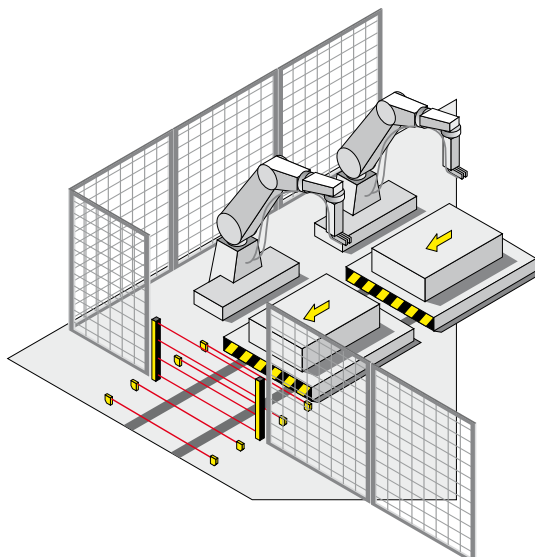

Safety light curtains with integrated muting-, blanking- and Cyclic-function

SLC 425I

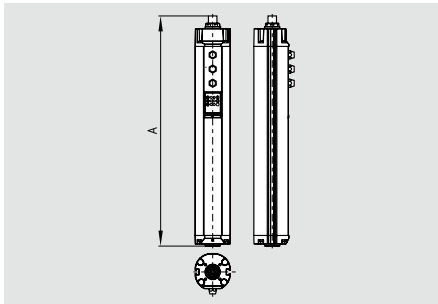

- **Safety light curtain**
- Type 4 to IEC/EN 61496-1, -2
- Resolution 14 and 30 mm
- Protection field heights 170 mm ... 1770 mm
- Integrated start/restart interlock
- Integrated contactor control
- Integrated muting and override function
- Integrated blanking function (fixed and mobile blanking)
- Cyclic operation (1 ... 8 Cycles)
- Range 0.3 ... 10 m
- Fail-safe transistor outputs
- Optical synchronisation
- Status display
- Different muting sequences can be parameterized
- Protection class IP67

Legend: A = Total length

Emitter:

A = 84.5 mm + Protection field height


Receiver:

A = 148.5 mm + Protection field height

Approvals



SLG 425I

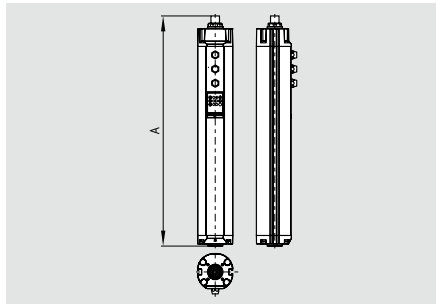

- **Safety light grid**
- 2-, 3-, 4-beam light grid
- Protection field heights 500, 800 or 900 mm
- Range 0.3 ... 18 m

Legend: A = Total length

Emitter:

2-beam A = 804 mm

3 and 4-beam A = 1124 mm

Receiver:

2-beam A = 868 mm

3 and 4-beam A = 1188 mm

Approvals



Ordering details

SLC 425I-E/R①-②-RFBC

No.	Option	Description
①	xxxx	Protected heights (mm) available lengths: 0170, 0250, 0330, 0410, 0490, 0570, 0650, 0730, 0810, 0890, 0970, 1050, 1130, 1210, 1290, 1370, 1450, 1530*, 1610*, 1690*, 1770*
②	14, 30	Resolution 14 mm, 30 mm

Ordering details

SLG 425I-E/R①-RF

No.	Option	Description
①		Distance between outermost beams:
	0500-02	500 mm, 2-beam
	0800-03	800 mm, 3-beam
	0900-04	900 mm, 4-beam

Mounting brackets are included in the delivery.

Note:

* only for resolution 30 mm

Converter for the parametrization NSR 0801

Technical data

Standards: IEC/EN 61496-1/-2
 Category: Type 4
 Enclosure: aluminium
 Enclosure dimensions: Ø 49 mm
 Connection: Connector plug
 - Emitter: M12, 4-pole,
 - Receiver: M12, 8-pole,
 - Muting sensors: 2 x connector plugs
 M8, 3-pole
 - Muting lamp: M8, 3-pole
 Max. cable length: 100 m / 1 Ω
 Protection class: IP67 to EN 60529
 Response time: 7 ... 28.5 ms (Depends on length and resolution)

Detection sensitivity (Resolution): 14 and 30 mm
 Protection field height:
 - Resolution 14 mm 170 ... 1450 mm
 - Resolution 30 mm 170 ... 1770 mm
 - 2-, 3-, 4-beam 500, 800, 900 mm

Protection field width, Range:
 - Resolution 14 mm 0.3 m ... 7 m
 - Resolution 30 mm 0.3 m ... 10 m
 - 2-, 3-, 4-beam 0.3 m ... 18 m

Start/restart interlock: Integrated
 Contactor control: Integrated
 Muting and override function: Integrated
 Muting sensors: 2 or 4 external sensors
 Light emission wavelength: 880 nm (infrared)
 U_s: 24 VDC ± 10%
 Safety outputs: 2 x PNP, 500 mA
 Power consumption: Emitter 4 W, Receiver 8 W

Data interface: RS 485
 Status and diagnostics: LED display
 Ambient temperature: -10 °C ... +50 °C
 Storage and transport temperature: -20 °C ... +70 °C

Classification:

Standards: EN ISO 13849-1; IEC 61508; IEC 60947-5-3

PL: up to e
 Category: up to 4
 PFH-value: 7.42 x 10⁻⁹/h
 SIL: up to 3
 Service life: 20 years

Ordering details

Connector:

Female connector M12, 4-pole straight

for emitter

cable length 5 m **101207741**
 cable length 10 m **101207742**
 cable length 20 m **101207743**

Female connector M12, 8-pole straight

for receiver


cable length 5 m **101207728**
 cable length 10 m **101207729**
 cable length 20 m **101207730**

Connecting cable for the muting sensors

M8, 3-pole to M12, 4-pole, 2 m **101210312**

Safety light grids with integrated muting-function

SLG 425-IP

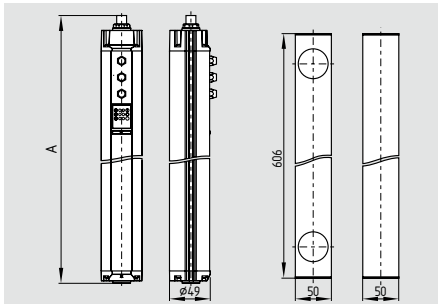

- **Safety light grid**
- Emitter and receiver in one enclosure (retro reflector)
- Type 4 to IEC/EN 61496-1, -2
- Protection field heights 500 mm
- 2-beam light grid
- Integrated start/restart interlock
- Integrated muting and override function
- Range 0.3 m ... 7 m
- Fail-safe transistor outputs
- Status display
- Protection class IP67


Technical data

Standards:	IEC/EN 61496-1/-2
Category:	Type 4
Enclosure:	aluminium
Enclosure dimensions:	Ø 49 mm
Deflecting mirror:	50 x 50 x 606 mm
Connection:	Connector plug
- emitter/receiver:	M12, 8-pole
Max. cable length:	100 m / 1 Ω
Protection class:	IP67 to EN 60529
Response time:	15 ms
Detection sensitivity (Resolution):	500 mm
Protection field height:	500 mm
Protection field width, Range:	0.3 m ... 7 m
Start/restart interlock:	Integrated
Light emission wavelength:	880 nm (infrared)
U _e :	24 VDC ± 10%
Safety outputs:	2 x PNP, 500 mA
Power consumption:	10 W
Data interface:	RS 485
Status and diagnostics:	LED display
Ambient temperature:	-10 °C ... +50 °C
Storage and transport temperature:	-20 °C ... +70 °C

Classification:

Standards:	EN ISO 13849-1; IEC 61508; IEC 60947-5-3
PL:	up to e
Category:	up to 4
PFH-value:	7.42 x 10 ⁻⁹ /h
SIL:	up to 3
Service life:	20 years

Technical data

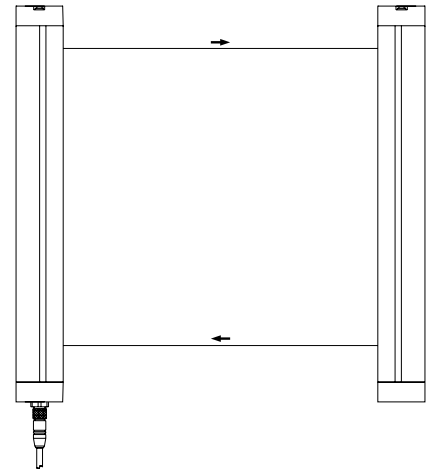

Approvals



Ordering details

SLG 425IP-E/R0500-02-RF
ULS-P-0501

Note

Mounting brackets are included in the delivery.

Note

Converter for the parametrization NSR 0801


Ordering details

Connector:

Female connector M12, 8-pole straight cable length 5 m	101207728
cable length 10 m	101207729
cable length 20 m	101207730

Safety light curtains with integrated diagnostics and parameter setting


SLC 440

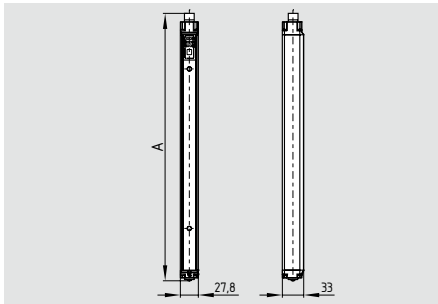

- **Safety light curtain**
- Type 4 to EN 61496-1, CLC/TS 61496-2
- Resolution 14 and 30 mm
- Protection field heights 170 mm ... 1770 mm
- Integrated start/restart interlock
- Integrated contactor control
- Integrated blanking function (fixed and mobile blanking)
- Diagnostic and parametrization interface
- Range 0,3 m ... 10 m
- Fail-safe transistor outputs
- Optical synchronisation
- LED Status display, 7-segment display
- Protection class IP67

Legend: A = Total length
A = 81 mm + Protection field height

SLG 440

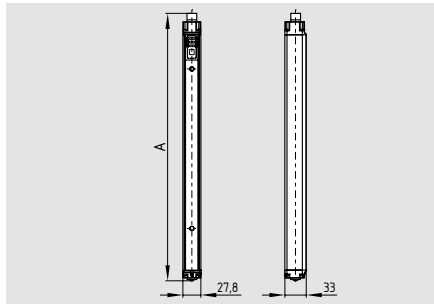

- **Safety light grid**
- 2-, 3- or 4-beam light grid
- Range 0,3 ... 12 m

Legend: A = Total length
2-beam A = 610 mm
3-beam A = 910 mm
4-beam A = 1010 mm

Technical data

Standards: EN 61496-1; CLC/TS 61496-2
 Category: Type 4
 Enclosure: aluminium
 Enclosure dimensions: 27.8 x 33 mm
 Connection: Connector plug
 - Emitter: M12, 4-pole,
 - Receiver: M12, 8-pole
 Max. cable length: 100 m / 1 Ω
 Protection class: IP67 to EN 60529
 Response time: 10 ... 27 ms (depends on length and resolution)

Detection sensitivity (Resolution): 14 and 30 mm
 Protection field height:
 - Resolution 14 mm 170 ... 1210 mm
 - Resolution 30 mm 170 ... 1770 mm
 - 2-, 3-, 4-beam 500, 800, 900 mm

Protection field width, Range:
 - Resolution 14 mm 0.3 m ... 7 m
 - Resolution 30 mm 0.3 m ... 10 m
 - 2-, 3-, 4-beam 0.3 m ... 12 m

Start/restart interlock: Integrated
 Contactor control: Integrated
 Blanking function: Integrated
 Light emission wavelength: 880 nm (infrared)
 U_e: 24 VDC ± 10%
 Safety outputs: 2 x PNP, 250 mA
 Power consumption: Emitter 1,8 W, Receiver 3,8 W

Status and diagnostics: LED-, 7-segment display
 Ambient temperature: -10 °C ... +50 °C

Storage and transport temperature: -25 °C ... +70 °C

Classification:
 Standards: EN ISO 13849-1; EN 62061
 PL: up to e
 Category: up to 4
 PFH-value:
 - SLC 440 11,4 x 10⁻⁹ /h
 - SLG 440 8,14 x 10⁻⁹ /h
 SIL: up to 3
 Service life: 20 years

Approvals



Ordering details

SLC 440-E/R①-②-01

No.	Option	Description
①	xxxx	Protected heights (mm) available lengths: 0170, 0250, 0330, 0410, 0490, 0570, 0650, 0730, 0810, 0890, 0970, 1050, 1130, 1210, 1290*, 1370*, 1450*, 1530*, 1610*, 1690*, 1770*
②	14	Resolution 14 mm with a range of 0.3 m ... 7 m
	30	Resolution 30 mm with a range of 0.3 m ... 10 m

-01 = integrated status indication (option)
 * only for resolution 30 mm

Approvals



Ordering details

SLG 440-E/R①-01

No.	Option	Description
①	Distance between outermost beams:	
	0500-02	500 mm, 2-beam
	0800-03	800 mm, 3-beam
	0900-04	900 mm, 4-beam
		Range 0.3 ... 12 m

-01 = integrated status indication (option)

Ordering details

Connector:

Female connector M12, 4-pole straight
for emitter

cable length 5 m **101207741**
 cable length 10 m **101207742**
 cable length 20 m **101207743**

Female connector M12, 8-pole straight

for receiver

cable length 5 m **101207728**
 cable length 10 m **101207729**
 cable length 20 m **101207730**

Cable for the parametrization

cable length 1 m **101217615**


Safety light curtains and safety light grids – accessories

System components




Programming cable KA-0974

System components



Mounting kit MS-1010

System components



Mounting kit MS-1073



Alignment kit EA-5



Mounting kit MS-1031 for ULS-A4



Mounting kit MS-690



Muting lamp with wall bracket MK2



Mounting kit MS-1035



Vibration damper MSD-2 / MSD-4



Mounting kit MS-1000 / MS 1072



Mounting kit MS-1051



Test rod PLS-01, PLS-02

Ordering details

Programming cable
for SLC/SLG 440

KA-0974

Laser alignment tool
for SLC / SLG 220

EA5

for SLC /SLG 420-425

EA5

Lighting element

Muting lamp with LED block
Operating conditions indication

MK2

Mounting kit for SLC /SLG 220

MS-1000

4 x angle incl. screws

MS-1072

2 x angle incl. screws

Ordering details

Mounting kit for central fixation
for SLC /SLG 220

2 x angle

MS-1010

Mounting kit for ULS-A4

2 x angle incl. screws

MS-1031

MS-1035 Mounting kit for
SLC/SLG 420-425 (V4A)

4 x angle incl. screws

MS-1035

Mounting kit for lateral fixation
for SLC/SLG 420-425

Consisting of 2 steel angles,
4 screws and 4 T-slot nuts

MS-1051

Ordering details

Mounting kit for deflecting mirror ULS-M

2 x angle

MS-1073

Mounting kit for SLC 430

2 x clamping profile

MS-690

Vibration damper

8 x vibration damper
for SLC/SLG 220

MSD-2

8 x vibration damper
for SLC/SLG 420-425 and
for SLC/SLG 440

MSD-4

Test rod

for resolution 30 mm

PLS-01

for resolution 14 mm

PLS-02

Safety light curtains and safety light grids – accessories

System components



Bus converter NSR-0801



Bus converter NSR-0700



Deflecting mirror ULS-M


System components



Deflecting mirror ULS-A4, Ø 49 mm



Mounting stands MST



Muting Carrier Set

System components



Protective enclosure with deflecting mirror



Protective enclosure for light grids SG

Ordering details

Bus converter

Converter for the parametrization of SLC/SLG 420-425

USB 2.0 interface

NSR 0801

Converter for the parametrization of SLC / SLG 220

RS232 interface

NSR 0700

Deflecting mirror ULS-M incl. mounting angle

Mirror height 350 mm

ULS-M-0350

Mirror height 500 mm

ULS-M-0500

Mirror height 650 mm

ULS-M-0650

Mirror height 800 mm

ULS-M-0800

Mirror height 950 mm

ULS-M-0950

Mirror height 1250 mm

ULS-M-1250

Mirror height 1550 mm

ULS-M-1550

Mirror height 1700 mm

ULS-M-1700

Ordering details

Deflecting mirror ULS-A4 incl. mounting angle

Mirror height 200 mm

ULS-A4-0200

Mirror height 400 mm

ULS-A4-0400

Mirror height 550 mm

ULS-A4-0550

Mirror height 700 mm

ULS-A4-0700

Mirror height 850 mm

ULS-A4-0850

Mirror height 1000 mm

ULS-A4-1000

Mounting stands

Height including plinth 500 mm

MST-0500

Height including plinth 750 mm

MST-0750

Height including plinth 1000 mm

MST-1000

Height including plinth 1250 mm

MST-1250

Height including plinth 1500 mm

MST-1500

Height including plinth 1750 mm

MST-1750

Height including plinth 2000 mm

MST-2000

Muting Carrier Set

2 x aluminium profile

MT-0400

Ordering details

Protective enclosure with deflecting mirror

Version for 2-beam light grid

ULS-ST2

Version for 3-beam light grid

ULS-ST3

Version for 4-beam light grid

ULS-ST4

Protective enclosure for light grids SLG

Height 1334 mm hot-dip galvanised

SG2

Height 1334 mm RAL 1021

SG4

Safety monitoring modules for optoelectronic safety components



Besides the traditional safety relay controls, Schmersal offers CE-type tested safety controls or other safety-oriented bus systems (e.g. AS-i Safety at Work) for different levels of complexity and combination depths. Which provide the user with many visualization and diagnostic possibilities.

Safety monitoring modules for optoelectronic safety components

SRB 301MA




- Suitable for signal processing of emergency stop command devices, interlocking devices, outputs connected to potentials and magnetic safety switches
- 1 or 2 channel control
- 3 safety contacts, STOP 0
- 1 additional acknowledgement output
- Reset function with trailing edge
- Optionally with short-circuit recognition (through switch)
- 4 LEDs to show operating conditions

Technical data

Standards:	IEC/EN 60204-1; EN 60947-5-1; EN ISO 13849-1; IEC 61508
Start conditions:	Start button (monitored)
Feedback circuit (Y/N):	yes
ON delay with reset button:	typ. 15 ms
Drop-out delay in case of emergency stop:	≤ 15 ms
Drop-out delay on „supply failure“:	typ. 80 ms
Rated operating voltage U _e :	24 VDC –15%/+20%, residual ripple max. 10%; 24 VAC –15%/+10%
Frequency range:	50 / 60 Hz
Fuse rating for the operating voltage:	Internal electronic protection, tripping current > 500 mA, reset after approx. 1 sec
Internal electronic protection (Y/N):	yes
Power consumption:	1.8 W; 4.4 VA
Monitored inputs:	
- Short-circuit recognition:	optional
- Wire breakage detection:	yes
- Earth connection detection:	yes
Number of NC contacts:	2
Number of NO contacts:	0
Max. conduction resistance:	max. 40 Ω
Outputs:	
Stop category:	0
Number of safety contacts:	3 (13-14; 23-24; 33-34)
Number of auxiliary contacts:	1 (41-42)
Max. switching capacity of the safety contacts:	230 VAC, 8 A ohmic (inductive in case of appropriate protective wiring); min. 10 V, 10 mA
Max. switching capacity of the auxiliary contacts:	24 VDC, 2 A
Utilisation category to EN 60947-5-1:	AC-15: 230 V / 6 A DC-13: 24 V / 6 A
Fuse rating of the safety contacts:	8 A slow blow
Fuse rating of the auxiliary contacts:	2 A slow blow
Mechanical life:	10 million operations
Ambient conditions:	
Ambient temperature:	–25 °C ... +60 °C
Storage and transport temperature:	–40 °C ... +85 °C
Protection class:	Enclosure: IP40, Terminals: IP20, Clearance: IP54
Mounting:	Snaps onto standard DIN rail to EN 60715
Connection type:	Screw terminals
- min. cable section:	0.25 mm ²
- max. cable section:	2.5 mm ²
Weight:	250 g
Dimensions (Height x Width x Depth):	100 x 22.5 x 121 mm

Approvals



Ordering details

SRB 301MA

Classification

Safety parameters:

Standards:	EN ISO 13849-1, IEC 61508, EN 60947-5-1
PL:	STOP 0: up to e
Category:	STOP 0: up to 4
PFH value:	STOP 0: ≤ 2.00 x 10 ⁻⁸ /h
SIL:	STOP 0: up to 3
Mission time:	20 years

The PFH value of 2.00 x 10⁻⁸/h applies to the combinations of contact load (current through enabling contacts) and number of switching cycles (n-op/y) mentioned in the table below. At 365 operating days per year and a 24-hours operation, this results in the below-mentioned switching cycle times (t-cycle) for the relay contacts. Diverging applications upon request.


Contact load	n-op/y	t-cycle
20 %	525,600	1.0 min
40 %	210,240	2.5 min
60 %	75,087	7.0 min
80 %	30,918	17.0 min
100 %	12,223	43.0 min

Safety monitoring modules for optoelectronic safety components

Note

- Monitors a guard door to PL e and category 4.
- Input level: The example shows a 2-channel control of a guard door monitoring with two position switches, whereof one with positive break, external reset button (R) and feedback circuit (H2).
- The feedback circuit monitors the position of the contactors Ka and Kb.
- Switch setting:
The cross-wire short detection function (factory default) is programmed by means of the switch located underneath the front cover of the module:
Position nQS (top):
no cross-wire short protection, suitable for 1-channel applications and applications with outputs with potential in the control circuits.
Position QS (bottom):
cross-wire short protection, suitable for 2-channel applications without outputs with potential in the control circuits.
- For 1-channel control, connect NC contact to S11/S12 and bridge S12/S22 (QS-switch = nQS)
- Connect potential p-type outputs of safety light grids/curtains to S12/S22. The devices must have the same reference potential. (QS-switch = nQS)
- Inductive loads (e.g. contactors, relays, etc.) are to be suppressed by means of a suitable circuit.

Wiring diagram

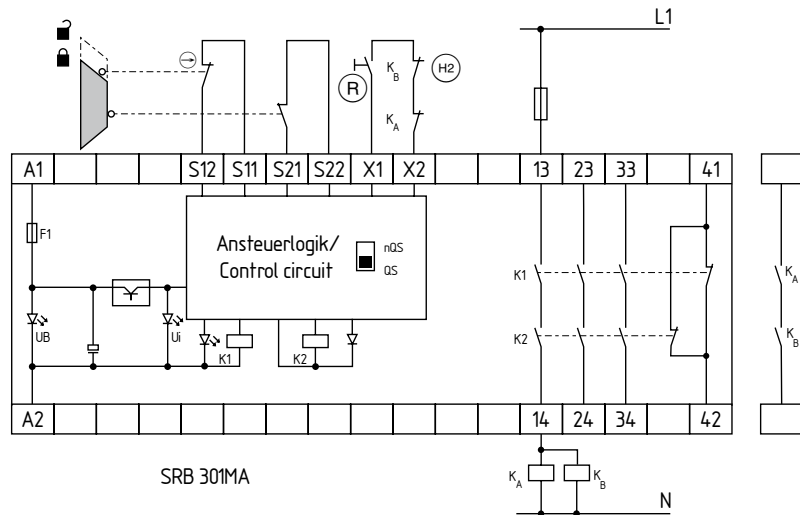

LED

The integrated LEDs indicate the following operating states.

- Position relay K1
- Position relay K2
- Supply voltage U_b
- Internal operating voltage U_i

Note

- The wiring diagram is shown with guard doors closed and in de-energised condition.

Safety monitoring modules for optoelectronic safety components

SRB 301MC




- Suitable for signal processing of emergency stop command devices, interlocking devices, outputs connected to potentials and magnetic safety switches
- 1 or 2 channel control
- 3 safety contacts, STOP 0
- 1 additional acknowledgement output
- Automatic reset function
- Optionally with short-circuit recognition (through switch)
- 4 LEDs to show operating conditions

Technical data

Standards:	IEC/EN 60204-1; EN 60947-5-1; EN ISO 13849-1; IEC 61508
Start conditions:	Automatic or start button
Feedback circuit (Y/N):	yes
ON delay with automatic start:	typ. 100 ms
ON delay with reset button:	typ. 20 ms
Drop-out delay in case of emergency stop:	≤ 20 ms
Drop-out delay on „supply failure“:	typ. 80 ms
Rated operating voltage U_e :	24 VDC –15%/+20%, residual ripple max. 10%; 24 VAC –15%/+10%
Frequency range:	50 / 60 Hz
Fuse rating for the operating voltage:	Internal electronic protection, tripping current > 500 mA, reset after approx. 1 sec
Internal electronic protection (Y/N):	yes
Power consumption:	2.0 W; 4.9 VA
Monitored inputs:	
- Short-circuit recognition:	optional
- Wire breakage detection:	yes
- Earth connection detection:	yes
Number of NC contacts:	2
Number of NO contacts:	0
Max. conduction resistance:	max. 40 Ω
Outputs:	
Stop category:	0
Number of safety contacts:	3 (13-14; 23-24; 33-34)
Number of auxiliary contacts:	1 (41-42)
Max. switching capacity of the safety contacts:	230 VAC, 8 A ohmic (inductive in case of appropriate protective wiring)
Max. switching capacity of the auxiliary contacts:	24 VDC, 2 A
Utilisation category to EN 60947-5-1:	AC-15: 230 V / 6 A DC-13: 24 V / 6 A
Fuse rating of the safety contacts:	8 A slow blow
Fuse rating of the auxiliary contacts:	2 A slow blow
Mechanical life:	10 million operations
Ambient conditions:	
Ambient temperature:	–25 °C ... +60 °C
Storage and transport temperature:	–40 °C ... +85 °C
Protection class:	Enclosure: IP40, Terminals: IP20, Clearance: IP54
Mounting:	Snaps onto standard DIN rail to EN 60715
Connection type:	Screw terminals
- min. cable section:	0.25 mm ²
- max. cable section:	2.5 mm ²
Weight:	250 g
Dimensions (Height x Width x Depth):	100 x 22.5 x 121 mm

Approvals



Ordering details

SRB 301MC-24V

Classification

Safety parameters:

Standards:	EN ISO 13849-1, IEC 61508, EN 60947-5-1
PL:	STOP 0: up to e
Category:	STOP 0: up to 4
PFH value:	STOP 0: ≤ 2.00 x 10 ⁻⁸ /h
SIL:	STOP 0: up to 3
Mission time:	20 years

The PFH value of 2.00 x 10⁻⁸/h applies to the combinations of contact load (current through enabling contacts) and number of switching cycles (n-op/y) mentioned in the table below. At 365 operating days per year and a 24-hours operation, this results in the below-mentioned switching cycle times (t-cycle) for the relay contacts. Diverging applications upon request.


Contact load	n-op/y	t-cycle
20 %	525,600	1.0 min
40 %	210,240	2.5 min
60 %	75,087	7.0 min
80 %	30,918	17.0 min
100 %	12,223	43.0 min

Safety monitoring modules for optoelectronic safety components

Note

- Monitors a guard door to PL e and category 4.
- Input level: The example shows a 2-channel control of a guard door monitoring with two position switches, whereof one with positive break, external reset button (R) and feedback circuit (H2).
- The feedback circuit monitors the position of the contactors Ka and Kb.
- Switch setting:
The cross-wire short detection function (factory default) is programmed by means of the switch located underneath the front cover of the module:
Position nQS (top):
no cross-wire short protection, suitable for 1-channel applications and applications with outputs with potential in the control circuits.
Position QS (bottom):
cross-wire short protection, suitable for 2-channel applications without outputs with potential in the control circuits.
- For 1-channel control, connect NC contact to S11/S12 and bridge S12/S22 (QS-switch = nQS)
- Connect potential p-type outputs of safety light grids/curtains to S12/S22. The devices must have the same reference potential. (QS-switch = nQS)
- Automatic start:
The automatic start is programmed by connecting the feedback circuit to the terminals X1/X2. If the feedback circuit is not required, establish a bridge.
- Inductive loads (e.g. contactors, relays, etc.) are to be suppressed by means of a suitable circuit.

Wiring diagram

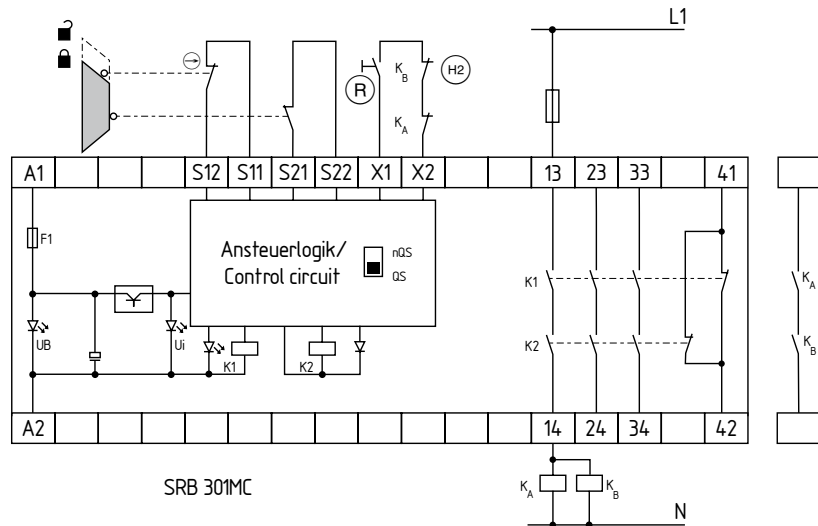

LED

The integrated LEDs indicate the following operating states.

- Position relay K1
- Position relay K2
- Supply voltage U_b
- Internal operating voltage U_i

Note

- The wiring diagram is shown with guard doors closed and in de-energised condition.

Definitions and terms:

Start interlock:

A device preventing the automatic release and therefore the automatic machine start when the power supply of the AOPD is switched on or interrupted and switched on again.

AOPD:

The abbreviation of **Active Optoelectronic Protective Device**.

Resolution:

The resolution or minimum object sensitivity represents the minimum size of an object that is detected in each part of the protection field.

Optoelectronic safety devices:

The here described are optoelectronic safety guards (AOPD), e.g. safety light barriers, safety light curtains and safety light grids as well as laser scanners and their corresponding safety relay modules

Type 2 acc. to EN 61496-1:

The Type 2 AOPD is a protective device, whose safety function is checked by means of regular tests. These devices must meet the requirements of Control Category 2 acc. to EN 954-1.

Type 4 acc. to EN 61496-1:

The Type 4 AOPD is a protective device, whose safety function is not affected by a failure or error in the system. These devices must meet the requirements of Control Category 4 acc. to EN 954-1.

Blanking:

In this configurable operation mode a safety light curtain blanks out a precisely defined area in the protection field. The operation mode. "Blanking" allows objects to be present in the sending area without deactivating the light curtain safety outputs. "Fixed Blanking" is when a fixed set of adjacent light beams are rendered inactive for the purpose of entering an object and pans into the protective area. "Floating Blanking" is when a set member (one or more) of adjacent beams is allowed

to ignore the presence of an object and not deactivating the OSSDs of the light curtain.

Muting:

Muting is a temporary automatic suspension of a safeguarding function by safety-related parts of the control system during otherwise safe conditions in the operation of a machine. The safeguarding function is realized through 2 or 4 muting sensors, which can distinguish between persons and objects. The suspension condition is signalled by means of a muting signal lamp.

OSSD:

Output Signal Switching Device of the AOPD (to EN 61496)

Protection field:

The protection zone is an invisible, two-dimensional light curtain consisting of infrared light beams, installed between the emitter and receiver unit. Depending on the chosen resolution (detection sensitivity) objects of a specific size intruding this light curtain will be detected.

Operating Range:

The operating range is the maximum distance that may exit between the light curtain's emitter and its receiver.

Protected height:

The protected height is a vertical area between the first and the last infrared light beam of an optoelectronic safety guard. (not the total housing length) The beginning and the end of this area is marked with symbols on the SLC/SLG's enclosure.

Restart interlock:

A device preventing the automatic restart of the machine, when the protection field is interrupted during a dangerous machine cycle or when the operating mode of the machine is set or changed.

Other publications

Companies



- Image brochure
- Product overview

Our updated image brochure includes "facts and figures" regarding the Schmersal Group. This brochure will introduce our business activities and our international production sites to you. And you will get a deeper insight in a medium-sized owner-managed company, which is successful for more than six decades already - according to the motto "Safe living, safe working".

The product overview gives you a concised overview how our range of approx. 18,000 safety switchgear is categorised. You will find the comprehensive description of this overview in our catalogues and product brochures (see below).

Products



Catalogues

- Safety technology
- Automation technology
- Explosion protection
- Elevator technology

Thematic brochures

- Electronic safety sensors and solenoid interlocks
- Safety Control PROTECT PSC
- AS-Interface Safety at Work
- Ex switchgear
- Control devices and indicator lights
- Safety relay modules PROTECT SRB

In the comprehensive catalogues, you will find our entire range of default switchgear, which the Schmersal Group offers for the individual businesses and fields of competence. All data can also be quickly found by means of intelligent search functions in our online catalogue at www.schmersal.net, where they can be download as well.

Our thematic brochures give you an overview of the principles, application possibilities and product range of the individual series and technologies.

Branches



- Food
- Woodworking
- Packaging
- Machine tools
- Elevators and Escalators

For a number of core industries of the machinery and plant construction, we have developed dedicated products and solutions, which do not only optimise the safety level, but the productivity of the machines as well.

We offer, for instance, different series of safety switchgear, which have been developed in accordance with the "Hygienic Design" principles; due to their protection class IP 69K, they can be cleaned using high-pressure jet steamers, a commonly used tool in many food-processing companies.

Services



- MRL News
- tec.nicum
- Safety Consulting

The "Safety Consulting" brochure gives you an overview of our worldwide services. Get informed about the service offer of our Safety Consultants, who can help you for instance with the CE Conformity Declaration process!

In our tec.nicum training centre, we regularly organise interesting seminars, lectures and workshops regarding machinery safety. Request our up-to-date programme!

You can subscribe for free to MRL News, which is regularly published, to keep in touch with the latest substantiated "news" regarding the development of the standards.

Headquarters

K.A. Schmersal GmbH
Industrielle Sicherheitssysteme
 Postfach 24 02 63,
 42232 Wuppertal
 Möddinghofe 30
 D-42279 Wuppertal
 Telefon: +49-(0) 2 02-64 74-0
 Telefax: +49-(0) 2 02-64 74-1 00
 info@schmersal.com
 www.schmersal.com

Germany - Northern region

Regionalbüro Wettberg

K.A. Schmersal GmbH
 Im Ostpark 2
 D-35435 Wettberg
 Telefon: +49-(0) 6 41-98 48-4 11
 Telefax: +49-(0) 6 41-98 48-4 21
 gsfrankfurt@schmersal.com

Hamburg

K.A. Schmersal GmbH
Geschäftsstelle Hamburg
 Innungsstraße 3
 D-21244 Buchholz i.d.N.
 Telefon: +49-(0) 41 81-9 22 0-0
 Telefax: +49-(0) 41 81-9 22 0-20
 gshamburg@schmersal.com

Berlin

KSA Komponenten der Steuerungs- und Automatisierungstechnik GmbH
 Pankstr. 8-10 / Aufg. L
 D-13127 Berlin
 Telefon: +49-(0) 30-47 48 24 00
 Telefax: +49-(0) 30-47 48 24 05
 info@ksa-gmbh.de
 www.ksa-gmbh.de

Hannover

ELTOP GmbH
 Robert-Bosch-Str. 8
 D-30989 Gehrden
 Telefon: +49-(0) 51 08-92 73 20
 Telefax: +49-(0) 51 08-92 73 21
 eltop@eltop.de
 www.eltop.de

Münster

K.A. Schmersal GmbH
Geschäftsstelle Münster
 Am Vechte Ufer 22
 D-48629 Metelen
 Telefon: +49-(0) 25 56-9 38 30
 Telefax: +49-(0) 25 56-93 83 73
 gsmuenster@schmersal.com

Köln

Stollenwerk
Technisches Büro GmbH
 Scheuermühlenstr. 40
 D-51147 Köln
 Telefon: +49-(0) 22 03-9 66 20-0
 Telefax: +49-(0) 22 03-9 66 20-30
 info@stollenwerk.de
 www.stollenwerk.de

Siegen

Siegfried Klein
Elektro-Industrie-Vertretungen
 In der Steinwiese 46
 D-57074 Siegen
 Telefon: +49-(0) 2 71-67 78
 Telefax: +49-(0) 2 71-67 70
 info@sk-elektrotechnik.de
 www.sk-elektrotechnik.de

Leipzig

K.A. Schmersal GmbH
Geschäftsstelle Leipzig
Servicepark
 Druckereistraße 4
 D-04159 Leipzig
 Telefon: +49-(0) 3 41-4 87 34 50
 Telefax: +49-(0) 3 41-4 87 34 51
 gsleipzig@schmersal.com

Germany - Southern region

Regionalbüro Nürnberg

K.A. Schmersal GmbH
 Lechstraße 21
 D-90451 Nürnberg
 Telefon: +49-(0)9 11- 6 49 60 53
 Telefax: +49-(0)9 11-63 29 07 29
 gsnuernberg@schmersal.com

Saarland

Herbert Neundörfer Werksvertretungen GmbH & Co. KG
 Am Campus 5
 D-66287 Göttelborn
 Telefon: +49-(0) 68 25-95 45-0
 Telefax: +49-(0) 68 25-95 45-99
 info@herbert-neundoerfer.de
 www.herbert-neundoerfer.de

Bayern Süd

INGAM Ing. Adolf Müller GmbH
Industriervertretungen
 Elly-Staegmeyr-Str. 15
 D-80999 München
 Telefon: +49-(0) 89-8 12 60 44
 Telefax: +49-(0) 89-8 12 69 25
 info@ingam.de
 www.ingam.de

Stuttgart

Gerhard Schützinger
Labor-Schütz GmbH
 Eichwiesenring 6
 D-70567 Stuttgart
 Telefon: +49-(0) 7 11-7 15 46-0
 Telefax: +49-(0) 7 11-7 15 46-18
 info@schuetzinger.de
 www.schuetzinger.de

Europe

Austria - Österreich

AVS-Schmersal Vertriebs Ges. m.b.H.
 Biröstraße 17
 1232 Wien
 Telefon: +43-(0) 1-6 10 28
 Telefax: +43-(0) 1-6 10 28-1 30
 info@avs-schmersal.at
 www.avs-schmersal.at

Belgium - Belgien

Schmersal Belgium NV/SA
 Nieuwlandlaan 16B
 Industriezone B413
 3200 Aarschot
 Telefon: +32-(0) 16-57 16 18
 Telefax: +32-(0) 16-57 16 20
 info@schmersal.be
 www.schmersal.be

Bulgaria - Bulgarien

CDL Sensorik OOD
 Stefan Caragea Street
 No 10 Office 4
 7002 Ruse City
 Telefon: +359-(0)0 40-7 35 16 55 25
 Telefax: +359-(0)0 40-2 69 25 33 44
 office@cdlsensorik.com
 www.cdlsensorik.com

Croatia - Kroatien

Tipteh Zagreb d.o.o.
 Pescanska 170
 10000 Zagreb
 Telefon: +385-1-3 81 65 74
 Telefax: +385-1-3 81 65 77
 tipteh.zagreb@zg.t-com.hr

Czech Republic - Tschech. Republik

Mercom Componenta spol. s.r.o.
 Ruská 67
 100 00 Praha 10
 Telefon: +4 20-(0) 2-67 31 46 40
 Telefax: +4 20-(0) 2-71 73 32 11
 mercom@mercom.cz

Denmark - Dänemark

Schmersal Danmark A/S
 Lautruphøj 1-3
 2750 Ballerup
 Telefon: +45-70 20 90 27
 Telefax: +45-70 20 90 37
 info@schmersal.dk
 www.schmersal.dk

Finland - Finnland

Advantecetec Oy
 Malminkaari 10B
 PO Box 149
 00701 Helsinki
 Telefon: +3 58-(0) 9-3 50 52 60
 Telefax: +3 58-(0) 9-35 05 26 60
 advantecetec@advantecetec.fi
 www.advantecetec.fi

France - Frankreich

Schmersal France
 BP 18 - 38181 Seyssins Cedex
 8, rue Raoul Follereau
 38180 Seyssins
 Telefon: +33-4 76 84 23 20
 Telefax: +33-4 76 48 34 22
 info@schmersal.fr
 www.schmersal.fr

Greece - Griechenland

Kalamarakis Sapounas S.A.
Ionias & Neromilou
 PO Box 46566
 13671 Chamomilos Acharnes
 Athens
 Telefon: +30-(0) 210-2 40 60 00-6
 Telefax: +30-(0) 210-2 40 60 07
 ksa@ksa.gr

Hungary - Ungarn

NTK Ipari-Elektronikai és Kereskedelmi Kft
 Mészáros L. u. 5.
 9023 Győr
 Telefon: +36-(0) 96-52 32 68
 Telefax: +36-(0) 96-43 00 11
 info@ntk-kft.hu
 www.ntk-kft.hu

Iceland - Island

Reykjafell Ltd.
 Skipholtli 35
 125 Reykjavik
 Telefon: +354-5 88 60 10
 Telefax: +354-5 88 60 88
 reykjafell@reykjafell.is

Italy - Italien

Schmersal Italia s.r.l.
 Via Molino Vecchio, 206
 25010 Borgosatollo, Brescia
 Telefon: +39-0 30-2 50 74 11
 Telefax: +39-0 30-2 50 74 31
 info@schmersal.it
 www.schmersal.it

Macedonia - Mazedonien

Tipteh d.o.o. Skopje
 Ul. Jani Lukrovski br. 2/33
 1000 Skopje
 Telefon: +389-70-39 94 74
 Telefax: +389-23-17 41 97
 tipteh@on.net.mk

Netherlands - Niederlande

Schmersal Nederland B.V.
 Lorentzstraat 31
 3846 AV Harderwijk
 Telefon: +31 (0)3 41-43 25 25
 Telefax: +31 (0)3 41-42 52 57
 info-nl@schmersal.com
 www.schmersal.nl

Norway - Norwegen

Schmersal Norge
 Hoffsvæien 92
 0377 Oslo
 Telefon: +47-22 06 00 70
 Telefax: +47-22 06 00 80
 info-no@schmersal.com
 www.schmersal.no

Poland - Polen

Schmersal - Polska Sp.j.
 ul. Baletowa 29
 02-867 Warszawa
 Telefon: +48-(0) 22-8 16 85 78
 Telefax: +48-(0) 22-8 16 85 80
 info@schmersal.pl
 www.schmersal.pl

Portugal - Portugal

Schmersal Ibérica, S.L.
 Apartado 30
 2626-909 Póvoa de Sta. Iria
 Telefon: +351 - 21 959 38 35
 Telefax: +351 - 21 959 42 83
 info-pt@schmersal.com
 www.schmersal.pt

Romania - Rumänien

A & C Electrics SRL
 Str. A.T. Laurian Nr. 16
 550228 Sibiu
 Telefon: +40-(0)7 44-60 35 56
 Telefax: +40-(0)2 69-21 36 26
 caslan.nita@acelectrics.ro

Russia - Russland

OOO AT electro Moskau
 ul. Avtosavodskaya 16-2
 109280 Moskau
 Telefon: +7-(0) 49 5-9 21 44 25
 Telefax: +7-(0) 49 5-9 26 46 45
 info@at-e.ru
 www.at-e.ru

OOO AT electro Petersburg

Polytechnickaya str, d.9.B
 194021 St. Petersburg
 Telefon: +7-(0) 81 2-7 03 08 17
 Telefax: +7-(0) 81 2-7 03 08 34
 spb@at-e.ru

AT- Electronics Ekaterinburg

Bebelya str. 17, room 405
 620034 Ekaterinburg
 Telefon: +7-(0) 34 3-2 45 22 24
 Telefax: +7-(0) 34 3-2 45 98 22
 ural@at-e.ru

Slovakia - Slowakei

Mercom Componenta s.r.o.
 Bechyňská 640
 199 21 Praha 9 - Letňany
 Czech Republic
 Telefon: +4 20-(0) 2-67 31 46 40
 Telefax: +4 20-(0) 2-71 73 32 11
 mercom@mercom.cz

Slovenia - Slowenien

Tipteh d.o.o.
 Ulica Ivana Roba 21
 1000 Ljubljana
 Telefon: +386-1-2 00 51 50
 Telefax: +386-1-2 00 51 51
 info@tipteh.si

Spain - Spanien

Schmersal Ibérica, S.L.
Pol. Ind. La Masia
 Camí de les Cabòries, Nave 4
 08798 Sant Cugat Seggarrues
 Telefon: +34 - 93 897 09 06
 Telefax: +34 - 93 396 97 50
 info-es@schmersal.com
 www.schmersal.es

Sweden - Schweden

Schmersal Nordiska AB
 Klockarns Väg 1
 43533 Mölnlycke
 Telefon: +46-(0) 31-3 38 35 00
 Telefax: +46-(0) 31-3 38 35 35
 solsten@schmersal.se
 www.schmersal.se

Addresses

- **Switzerland - Schweiz**
Schmersal Schweiz AG
 Moosmattstraße 3
 8905 Arni
 Telefon: +41-(0) 43-3 11 22 33
 Telefax: +41-(0) 43-3 11 22 44
 info-ch@schmersal.com
 www.schmersal.ch
- **Turkey - Türkei**
BETA Elektrik Sanayi ve Ticaret
Dogan Bektas
Okçumusa Caddesi
 Anten Han No. 16/A
 34420 Karaköy / Istanbul
 Telefon: +90-212-235 99 14
 Telefax: +90-212-253 54 56
 info@betaelektrik.com
 www.betaelektrik.com
- **UK - Großbritannien**
Schmersal Ltd.
Sparrowhawk Close
Unit 1, Beauchamp Business Centre
Enigma Park
 Worcs WR14 1GL, Malvern
 Telefon: +44-(0) 16 84-57 19 80
 Telefax: +44-(0) 16 84-56 02 73
 support@schmersal.co.uk
 www.schmersal.co.uk
- **Ukraine - Ukraine**
AT Electronics Kiev
 Zlatoustovskaya str. 32
 01135 Kiev
 Telefon: +38- (0) 44-4 82 22 19
 Telefax: +38- (0) 44-4 86 57 08
 info@at-e.com.ua
 www.at-e.com.ua
- **Chile - Chile**
Vitel S.A.
 Chiloé 1189, Casilla 440-3
 Santiago
 Telefon: +56 (2) 5 56 26 46
 Telefax: +56 (2) 5 55 57 90
 francisco@vitel.cl
 www.vitel.cl
- **PR China - VR China**
Schmersal Industrial
Switchgear Co. Ltd.
Central Plaza 1001
 Huang Pi Bei Road 227
 200003 Shanghai
 Telefon: +86-21-63 75 82 87
 Telefax: +86-21-63 75 82 97
 sales@schmersal.com.cn
 www.schmersal.com.cn
- **Colombia - Kolumbien**
Cimpex Ltda.
 Calle 53 # 45-112 Of. 1401
 Ed. Colseguros
 Medellín-Antioquia
 Telefon: +57 4 512 05 80
 Telefax: +57 4 251 46 08
 cimpexjjo@une.net.co
- **Costa Rica - Costa Rica**
Euro-Automation-Tec, S.A.
 Apartado 461 – 1200 Pavas
 1000 – San José
 Tel/Fax: +5 06-22 35-60 85
 eurotec.jhtg@yahoo.de
- **Honduras - Honduras**
Lusitana Intl - Honduras
 2 calle entre 8 y 9 avenida N.O.
 Barrio la Primavera
 Choloma
 Telefon: +5 (04) 61 7 - 04 55
 Mobil: +5 (04) 33 96 22 90
 jaimefernandes2002@yahoo.com
- **India - Indien**
Schmersal India Pvt. Ltd.
 7th floor, Vatika Triangle
 Block A, Sushant Lok
 Phase I, Mehrauli-Gurgaon Road
 122 002 Gurgaon
 Telefon: +91-12-44 34 23 00
 Telefax: +91-12-44 34 23 33
 info-in@schmersal.com
 www.schmersal.in
- **Indonesia - Indonesien**
PT. Wiguna Sarana Sejahtera
 Jl. Daan Mogot Raya No. 47
 Jakarta Barat 11470
 Telefon: +62-(0) 21-5 63 77 70-2
 Telefax: +62-(0) 21-5 66 69 79
 email@ptwiguna.com
 www.ptwiguna.com
- **Israel - Israel**
A.U. Shay Ltd.
 23 Imber St. Kiriat. ArieH.
 P.O. Box 10049
 Petach Tikva
 Telefon: +9 72-3-9 23 36 01
 Telefax: +9 72-3-9 23 46 01
 shay@uriel-shay.com
- **Japan - Japan**
Schmersal Japan Branch Office
 3-39-8 Shoan, Sugunami-ku
 Tokyo 167-0054
 Telefon: +81-3-3247-0519
 Telefax: +81-3-3247-0537
 safety@schmersal.jp.com
 www.schmersal.jp.com
- **Korea - Korea**
Mahani Electric Co. Ltd.
 792-7 Yeoksam-Dong, Kangnam-Gu
 135-080 Seoul
 Telefon: +82-(0) 2-21 94-33 00
 Telefax: +82-(0) 2-21 94-33 97
 yskim@mec.co.kr
 www.mec.co.kr
- **Malaysia - Malaysien**
Ingermark (M) SDN.BHD
 No. 29, Jalan KPK 1/8
 Kawasan Perindustrian Kundang
 48020 Rawang, Selangor Darul Ehsan
 Telefon: +6 03-60-34 27 88
 Telefax: +6 03-60-34 21 88
 enquiry@ingermark.com
- **Mexico - Mexiko**
ISEL SA de CV
 Via Lopes Mateos
 128. Col Jacarandas
 54050 Tlalnepantla Edo. de Mexico
 Telefon: +52 (55) 53 98 80 88
 Telefax: +52 (55) 53 79 39 85
 mario.c@isel.com.mx
 www.isel.com.mx
- **New Zealand - Neuseeland**
Hamer Automation
 85A Falsgrave Street
 Philipstown
 Christchurch, New Zealand
 Telefon: +64 (0)33 66 24 83
 Telefax: +64 (0)33 79 13 79
 sales@hamer.co.nz
 www.hamer.co.nz
- **Paraguay - Paraguay**
All-Med
Importación - Exportación -
Representaciones
 Tacuary No. 1318e / 1 ra. Y 2da.
 Asunción
 Telefon: +595 (21) 37 04 40
 Telefax: +595 (21) 37 16 87
 allmed@telesurf.com.py
- **Peru - Peru**
Fametal S.A.
Av. Republica de Panamá 3972
 Surquillo Lima
 Telefon: +511 44 11 100 / 44 10 105
 Telefax: +511 42 25 120
 fametal@fametal.com
 www.fametal.com
- **Serbia/Montenegro -**
Serbien/Montenegro
Tipteh d.o.o. Beograd
 Bulevar Zorana Djindjica 45D, lokal 18
 11070 Novi Beograd
 Telefon: +3 81-11-30 18 326
 Telefax: +3 81-11-31 31 057
 damir.vecerka@tipteh.rs
 www.tipteh.rs
- **Singapore - Singapur**
Tong Sim Marine & Electric Co.
 46 Kaki Bukit Crescent
 Kaki Bukit Techpark 1
 Singapore 416269
 Telefon: +65-67 43 31 77
 Telefax: +65-67 45 37 00
 tongsim@singnet.com.sg
 www.tongsim.com
- **South Africa - Südafrika**
A+A Dynamic Distributors (Pty) Ltd.
 3 Ruarch Street
 Park Central Johannesburg
 PO Box 38247
 2016 Booyensens
 Telefon: +27-11-4 93 50 22
 Telefax: +27-11-4 93 07 60
 awkayser@iafrica.com
 www.aanda.edx.co.za
- **Taiwan - Taiwan**
Golden Leader Camel Ent. Co., Ltd.
 No. 453-7, Pei Tun Rd.
 Taichung, Taiwan
 Telefon: +886-4-22 41 29 89
 Telefax: +886-4-22 41 29 23
 camel88@ms46.hinet.net
 www.leadercamel.com.tw
- **Thailand - Thailand**
M. F. P. Engineering Co. Ltd.
 64-66 Buranasart Road
 Sanchaoporsva
 Bangkok 10200
 Telefon: +66-2-2 26 44 00
 Telefax: +66-2-2 25 67 68
 info@mfpthai.com
 www.mfpthai.com
- **United Arab Emirates -**
Vereinigzte Arabische Emirate
eurotech JLT
 Office No.3404, 34th Floor,
 HDS Tower, Sheikh Zayed Road,
 Jumeirah Lakes Towers (JLT),
 P.O.Box 643650,
 Dubai, UAE
 Telefon: +9 71-4-4 21 46 00
 Telefax: +9 71-4-4 21 46 01
 sales@eurotech.ae
 www.eurotech.ae
- **USA - USA**
Schmersal Inc.
 660 White Plains Road, Suite 160
 Tarrytown, NY 10591-9994
 Telefon: +1-(0) 9 14-3 47-47 75
 Telefax: +1-(0) 9 14-3 47-15 67
 infousa@schmersal.com
 www.schmersalusa.com
- **Uruguay - Uruguay**
Gliston S.A.
 Pedernal 1896 – Of. 203
 CP 11800 Montevideo
 Telefon: +598 (2) 2 00 07 91
 Telefax: +598 (2) 2 00 07 91
 colmedo@gliston.com.uy
 www.gliston.com.uy
- **Venezuela - Venezuela**
EMI Equipos y Sistemas C.A.
 Calle 10, Edf. Centro Industrial
 Martinisni, Piso 3, La Urbina
 Caracas
 Telefon: +58 (212) 2 43 50 72
 Telefax: +58 (212) 2 43 50 72
 jpereira@emi-ve.com

Worldwide

- **Argentina - Argentinien**
Condelectric S. A.
 Hipólito Yrigoyen 2591
 1640 Martínez
 Pcia. de Buenos Aires
 Telefon: +54 (11) 48 36 10 53
 Telefax: +54 (11) 48 36 10 53
 info@condelectric.com.ar
 www.condelectric.com.ar
- **Australia - Australien**
Control Logic Pty. Ltd.
 25 Lavarack Avenue, PO Box 1456
 Eagle Farm, Queensland
 Telefon: +61 (0)7 36 23 12 12
 Telefax: +61 (0)7 36 23 12 11
 sales@control-logic.com.au
 www.control-logic.com.au
- **Bolivia - Bolivien**
International Fil-Parts
Import/Export S.R.L
 3er. Anillo, 1040, Frente al Zoo
 Santa Cruz de la Sierra
 Telefon: +591 (3) 3 42 99 00
 Telefax: +591 (3) 3 42 36 37
 presidente@filparts.com.bo
 www.filparts.com.bo
- **Brazil - Brasilien**
ACE Schmersal
Eletroeletrônica Industrial Ltda.
 Rodovia Boituva-Porto Feliz, Km 12
 Vila Esplanada – CEP: 18550-000
 Boituva – SP
 Telefon: +55-(0) 15-32 63-98 66
 Telefax: +55-(0) 15-32 63-98 90
 export@schmersal.com.br
 www.schmersal.com.br
- **Canada - Kanada**
Schmersal Canada LTD.
 15 Regan Road Unit #3
 Brampton, Ontario L7A 1E3
 Telefon: (905) 495-7540
 Telefax: (905) 495-7543
 infocanada@schmersal.com
 www.schmersalcanada.com



The Schmersal Group

For many years the privately owned Schmersal Group has been developing and manufacturing products to enhance occupational safety. What started out with the development and manufacture of a very wide variety of mechanical and non-contact switchgear has now become the world's largest range of safety systems and solutions for the protection of man and machine. Over 1,200 employees in more than 50 countries around the world are developing safety technology solutions in close cooperation with our customers, thus contributing to a safer world.

Motivated by the vision of a safe working environment, the Schmersal Group's engineers are constantly working on the development of new devices and systems for every imaginable application and requirement of the different industries. New safety concepts require new solutions and it is necessary to integrate new detection principles and to discover new paths for the transmission and evaluation of the information provided by these principles. Furthermore, the set of ever more complex standards, regulations and directives relating to machinery safety also requires a change in thinking from the manufacturers and users of machines.

These are the challenges which the Schmersal Group, in partnership with machinery manufacturers, is tackling and will continue to tackle in the future.

Product ranges



Safe switching and monitoring

- Guard door monitoring safety switches
- Command devices with safety function
- Tactile safety devices
- Optoelectronic safety devices

Safe signal processing

- Safety monitoring modules
- Safety controllers
- Safety bus systems

Automation

- Position detection
- Command and signalling devices

Industries



- Elevators and escalators
- Packaging
- Food
- Machine tools
- Wood working

Services



- Application advice
- CE conformity assessment
- Risk assessment in accordance with the Machinery Directive
- Stop time measurements
- Training courses

Competences



- Machine safety
- Automation
- Explosion protection
- Hygienic design

All data mentioned in this flyer have been carefully checked.
Technical modifications and errors excepted.

www.schmersal.com

 **SCHMERSAL**
Safe solutions for your industry

